

Application of a hybrid Electrocoagulation-Fenton process in yarn dye wastewater: Kinetic study

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2016 IOP Conf. Ser.: Mater. Sci. Eng. 162 012026

(<http://iopscience.iop.org/1757-899X/162/1/012026>)

View [the table of contents for this issue](#), or go to the [journal homepage](#) for more

Download details:

IP Address: 203.114.224.22

This content was downloaded on 13/12/2016 at 06:22

Please note that [terms and conditions apply](#).

Application of a hybrid Electrocoagulation-Fenton process in yarn dye wastewater : Kinetic study

L.Riadi^{1,2}, L.Sapei¹, T.Lidiawati^{1,2} and Y.E.Agustin¹

¹Chemical Engineering Department, University of Surabaya

²Center for Environmental Studies, University of Surabaya


Jalan Raya Kalirungkut , Surabaya, Indonesia

E-mail : lieke@staff.ubaya.ac.id

Abstract. Reactive dyes contain a significant portion of colorants used in yarn dyeing process and also in textile industry. Since the COD content is usually high in such wastewater, we conducted a hybrid electrocoagulation-fenton method to treat the wastewater. This work describes the application of the hybrid system to the removal of chemical oxygen demand and color from the wastewater in a batch reactor. Having worked with initial pH of 3,0; temperature at 30°C, molar ratio of Fe²⁺/H₂O₂ = 1/10 and the mol ratio H₂O₂/COD = 4, we got 88.3% COD conversion and 88.5% color removal. The COD degradation process can be explained in two phases, the first phase is instantaneous reaction and the second phase is first order reaction. The kinetic constant was 0.0053 minute⁻¹ and the rate of COD degradation was 0.0053[COD] mg/L minute.

1. Introduction



The disposal of yarn dye wastewater is a problematic issue in the area of high density population in Surabaya city. The wastewater is dark black to red colored, since it contains a lot of dye substances. Since the wastewater can not be treated biologically, we proposed a hybrid method to remove color, Chemical Oxygen Demand (COD) and Total Suspended Solid (TSS) from the wastewater. Advanced Oxidation Processes (AOPs) has been known for its capacity in reducing COD from recalcitrant wastewaters [1-5]. A hybrid system consists of electrocoagulation-fenton process will give a good combination to solve the wastewater. Electrocoagulation will help fenton oxidation process since high TSS will impair the oxidation. Hydrogen peroxide has been widely used for oxidizing agent, it is not effective to oxidize the organic compounds if it is used alone. The presence of metal salts especially ferrous ions can enhance hydrogen peroxide to form hydroxyl radicals. The standard redox potential of hydroxyl radical is 2.80 V and hydrogen peroxide is 1.77 V [6], so the radicals are more powerful oxidizing agent. Ferrous ions and hydrogen peroxide are known as Fenton's reagent and used in ambient temperature. The Fenton used in this study is a homogenous catalytic oxidation process involving the reaction of hydrogen peroxide with ferrous ions. The hydroxyl radicals are generated from this reaction :



In the presence of organic contaminants (RH), the contaminants will be oxidized by the radicals as following



The hydrogen peroxide also can regenerate Fe³⁺ to form Fe²⁺,



The new radical ($R\bullet$) and also the hydroxyl radical ($HO\bullet$) can degrade organic compound to carbon dioxide and water. Result from our previous study showed that the best performance of COD removal was at molar ratio of $Fe^{2+}/H_2O_2 = 1/10$ and the mol ratio of $H_2O_2/COD = 4$. The aim of this work is to investigate the application of hybrid method Electrocoagulation-Fenton in the removal of color and COD from yarn dye wastewater at various pH. The kinetic of the Fenton process in degrading the COD was also studied.

2. Materials and Methods

2.1. Yarn dye wastewater

The wastewater in this study was collected from a yarn dye industry utilizing variety of textile color with the COD content of 872 ppm, BOD (Biological Oxygen Demand) = 108 ppm, TSS 6220 ppm, color (Optical Density) =1.65 and pH 4.8.

2.2. Methods

2.2.1. Experiments

A flexi glass reactor with 1500 cm^3 volume was used. Anode and Cathode Al/Al was used with a distance between two electrodes was 2 cm. The size of Aluminium plate was 8cm x 8 cm, with a thickness of 2 mm. The electrocoagulation process used a method as described by Riadi *et.al* [7]. The effluent from electrocoagulation process was then used as influent for Fenton oxidation process. A 1.5 L reactor equipped with stirrer and cooling jacket was used for the experiment. The cooling jacket was used to maintain the experiment at room temperature. The molar ratio of $Fe^{2+}/H_2O_2 = 1/10$ and molar ratio of H_2O_2 to COD = 4. The initial pH in these experiments were varied. Samples were withdrawn periodically up to 90 minutes of experiment.

2.2.2 Analytical methods

Chemical Oxygen Demand was measured using closed reflux, colorimetric method [8]. Total Suspended solid was measured using dried method based on a method from APHA, color measurement was conducted using UV-Vis spectrophotometer from APHA [8]. The BOD (Biological Oxygen Demand) was measured by respirometer using BOD system BD600, Lovibond.

3. Results and Discussion

Effluent from electrocoagulation process has characteristic as presented in Table 1. Electrocoagulation will help fenton oxidation process since high TSS will hinder fenton oxidation. Suspended solid in the wastewater will interfere fenton process, hence electrocoagulation was introduced prior fenton process. Hence, we proposed hybrid system electrocoagulation-fenton processes in this study. Before performing a batch process for Fenton oxidation, the effluent from electrocoagulation process was examined.

Table 1. Characteristic of yarn dye wastewater after electrocoagulation

Parameters	Value	% removal
pH	4.8	n/a
COD	515 ppm	41
TSS	5810 ppm	6.6
Color (Optical Density)	0.192	88.4

3.1. Effect of initial pH

An important variable process in Fenton oxidation is pH, the best operation pH in the experiment was pH=3.0 (Table 2) which gave the best of COD removal. Result from the experiment is in line with a

review reported by Wang *et.al* [9]. The process is called homogenous Fenton process. The production of hydroxyl radicals is influenced by pH [10]. Since it is a homogenous Fenton process, the optimum of initial pH range is 2.5-3.0 for degradation of the most organic compounds. In higher pH (pH>3.0) the hydrolysis and precipitation of Fe^{3+} in the liquid phase can reduce the capacity of the catalyst itself [11]. However, if the pH is too low (< 2.50), there will be a strong scavenging effect of hydroxyl radical by H^+ as reaction below :

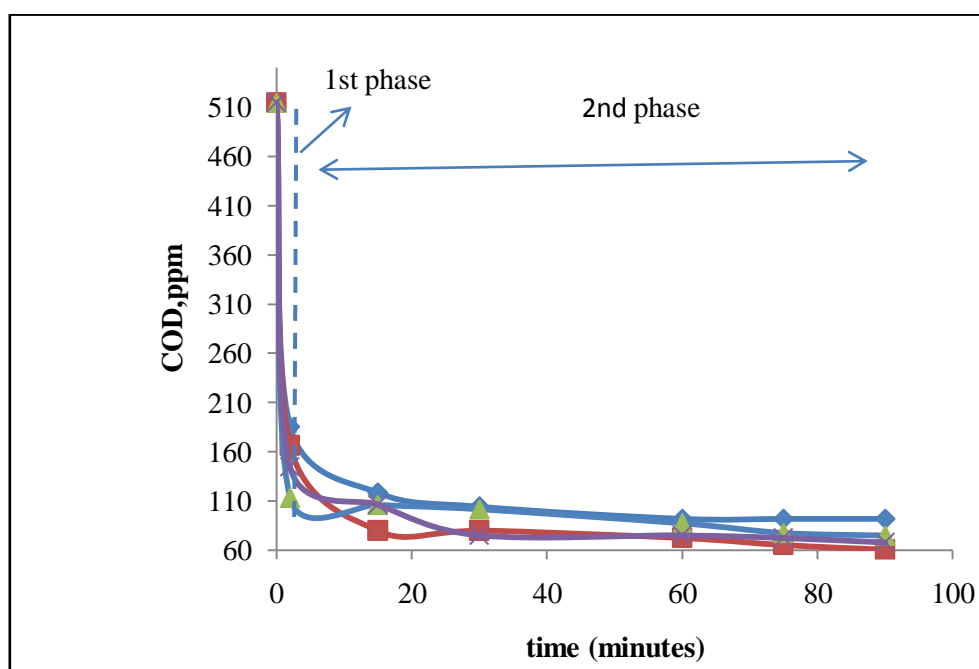



Figure 1. COD profile in a fenton oxidation batch system at molar ratio of $Fe^{2+}/H_2O_2 = 1/10$; molar ratio of H_2O_2 to COD = 4.0, x = pH 5.0, ▲ = pH 4.0, ■ = pH 3.0, ◆ = pH 2.0

Figure 1 shows the COD profile at different initial pH of wastewater. The first two minutes was an instantaneous reaction which showed a sharply decrease of COD which we mentioned as first phase. After 2 minutes of reaction the reduction of COD was continue up to 90 minutes of experiment, but the degradation was not as fast as that at the first two minutes. The poor performance for COD removal was at initial pH of 2.0, since at lower pH the reaction of hydrogen peroxide with Fe^{2+} is affected because of complex species formation ($Fe(H_2O)_6^{2+}$) [3].

Table 2. Percentage removal of COD at different initial pH of wastewater

Initial pH	% removal of COD for the first two minutes	% total removal of COD
2.0	63.9	82.1
3.0	67.8	88.3
4.0	78.1	85.4
5.0	71.8	86.0

Fenton process can improve the treatment of COD removal for additional 47.3 % removal since the hydroxyl radicals which is produced from Fenton process is a strong oxidation agent. The color removal almost didn't occur in the Fenton process since all color has been removed in electrocoagulation process.

3.2..Kinetic study

The kinetic removal of COD during Fenton oxidation process was studied based on the assumption that hydrogen peroxide was in excess as the molar ratio of H_2O_2 to COD was 4.0. Hence, the kinetic removal of COD in batch system will follow the pseudo first order and can be written as follows :

$$\frac{-dCOD}{dt} = k [COD] \quad (6)$$

The equation can be integrated between time of experiment, $t=0$ and $t = t_{\text{final}}$, which giving equation 7:

$$\ln \frac{COD_0}{COD} = k t \quad (7)$$

The first two minutes of the reaction is an instantaneous reaction, which is predicted as written in equation (1) and (2). The reaction after two minutes was slower, which is predicted that the hydrogen peroxide reacted with Fe^{3+} to form Fe^{2+} and hydroperoxy radical $HO_2 \bullet$. The standard redox potential of hydroperoxy radical is lower than that of hydroxyl radical. Hence, the oxidation of organic compound is slower compare to that in the first two minutes. The values of k (kinetic constant) and R^2 (R-squared) are presented in Table 3.

Table 3. The parameter kinetic constant obtained from Fenton oxidation at various initial pH.

Initial pH	k (kinetic constant, min^{-1})	R-squared value
2.0	0.0033	0.8348
3.0	0.0053	0.9718
4.0	0.004	0.983
5.0	0.0046	0.6716

The value of k decreases with the pH decrease below 3.0. The best performance of the Fenton oxidation is for $\text{pH}=3.0$. The degradation of COD can be written as $\frac{-d \text{COD}}{dt} = 0.0053 (\text{COD}) \text{ mg/L min}$. The R-squared value is lower in Initial pH 5.0 since the precipitation of Fe^{3+} in higher pH can hinder the oxidation process and impair the COD analysis which gave a poor data of COD and lead to the unfit model of pseudo first order.

4. Conclusion

The overall results of this study show that the application of hybrid Electrocoagulation-Fenton oxidation is a promising method to treat yarn dye wastewater. The treatment achieved a significant decrease of COD which has been shown as 88.3 % removal. The color was also removed by 88.5 %. The best performance for the Fenton oxidation in batch system was at initial pH 3.0 and molar ratio of $Fe^{2+}/H_2O_2 = 1/10$; molar ratio of H_2O_2 to COD = 4. The kinetic study based on COD degradation showed that the reaction is first order with kinetic constant (k) 0.0053 min^{-1} .

Acknowledgement

The authors greatly appreciate financial support from Indonesia Directorate General of Research and Higher Education Research Grant 2016 under a PUPT scheme. The valuable contribution of R. Wisanto and A.R. Herlambang are also acknowledged.

References

- [1] Barbusinski K and Fajkis S 2011 *Environmental Progress and Sustainable Energy* **30** 4 620-631
- [2] Guclu D, Sirin N, Sahinkaya S, Sevimli MF 2013 *Environmental Progress and Sustainable Energy* **32** 2 176-180
- [3] Lucas M S and Peres J A 2009 *Journal. of Hazardous Materials* **168** 1253-1259
- [4] Patil N N and Shukla S R 2015 *Environmental Progress and Sustainable Energy* **34** 6 1652-1661
- [5] Wang Z, Chen K, Li J, Mo L and Wang Q 2011 *Environmental Progress and Sustainable Energy* **30** 2 168-176
- [6] Tarr M A 2013 Fenton and Modified Fenton Methods for pollutant degradation, in *Chemical Degradation Methods for wastes and Pollutants* ed. MA Tarr (Marcell Dekker Inc, New York) pp 165-178
- [7] Riadi L, Ferydhiawati W, Loeman L D S 2014 *Reaktor* **15** 2 73-78
- [8] APHA, 1998. *Standard methods for the examination of water and wastewater*, 20th ed (APHA)
- [9] Wang N, Xheng T, Zhang G, Wang P 2016 *Journal of Environmental Chemical Engineering* **4** 762-787
- [10] Qiao R P, Li N, Qi X H, Wang Q S and Zhuang Y Y 2005 *Toxicol* **45** 745-752
- [11] Fassi S, Djebbar K, Bousnoubra I, Chenini H and Sehili T 2014 *Desalination and Water Treatment* **52** 4982-4989

10/11

10th Conference Series on the History of Mathematics

10th Conference Series
on the History of Mathematics

517

10th Conference Series
on the History of Mathematics

10th Conference Series
on the History of Mathematics

10/11

also developed by scimago:



SCIMAGO INSTITUTIONS RANKINGS



Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name



- Home
- Journal Rankings
- Country Rankings
- Viz Tools
- Help
- About Us

ⓘ ×

Oxford Open Economics

New in the Oxford Open Series

The journal welcomes interdisciplinary work utilizing economic methods and theories

academic.oup.com


OPEN

IOP Conference Series: Materials Science and Engineering

Discontinued in Scopus as of 2021

COUNTRY

United Kingdom



SUBJECT AREA AND CATEGORY

Engineering
 Engineering (miscellaneous)

 Materials Science
 Materials Science (miscellaneous)

PUBLISHER

IOP Publishing Ltd.

H-INDEX

44

PUBLICATION TYPE

Conferences and Proceedings

ISSN

17578981, 1757899X

COVERAGE

2009-2020

INFORMATION

- [Homepage](#)
- [How to publish in this journal](#)
- mse@iop.org


ⓘ ×

Carbon Neutral World

MHI Group

SCOPE

The open access IOP Conference Series provides a fast, versatile and cost-effective proceedings publication service for your conference. Key publishing subject areas include: physics, materials science, environmental science, bioscience, engineering, computational science and mathematics.






 Join the conversation about this journal

Tes Skill Bahasa Inggrismu




Bimbel Online Bahasa Inggris Dengan Banyak Pilihan Program Sesuai

English Academy

[Learn More](#)

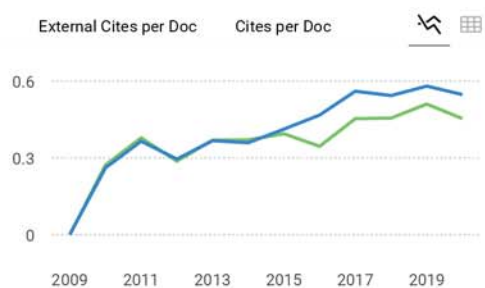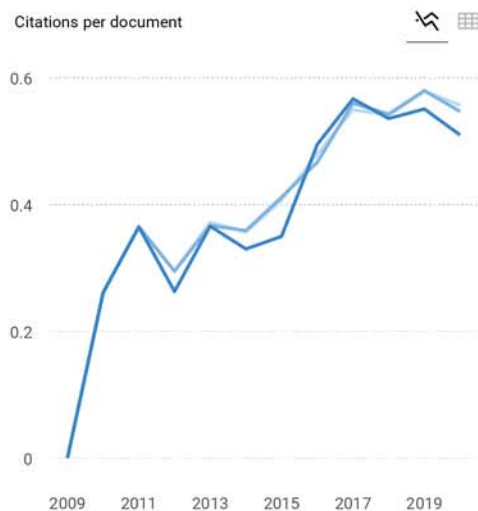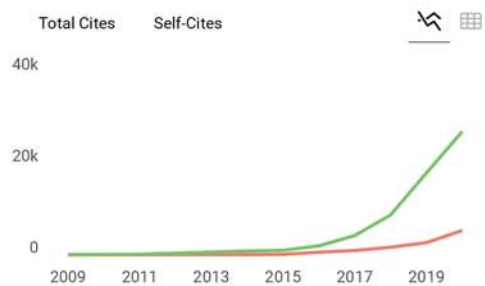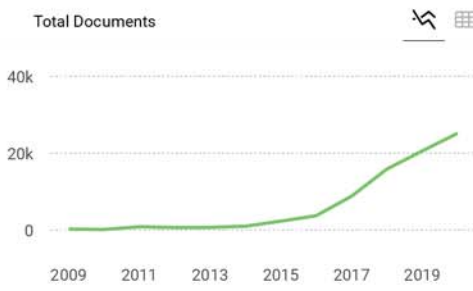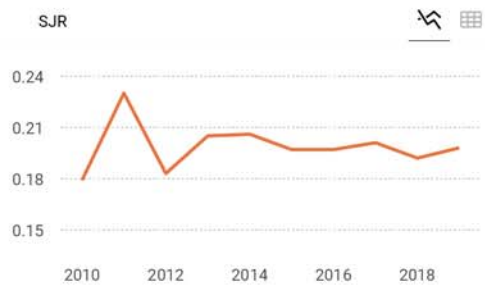

● Cites / Doc. (4 years)
● Cites / Doc. (3 years)
● Cites / Doc. (2 years)

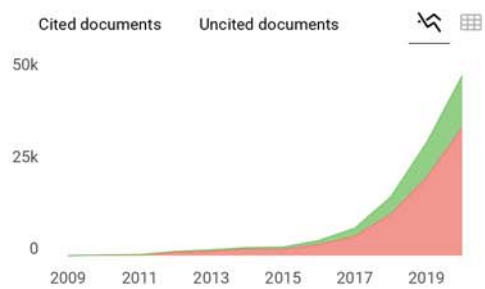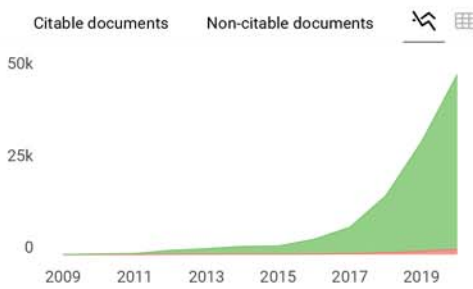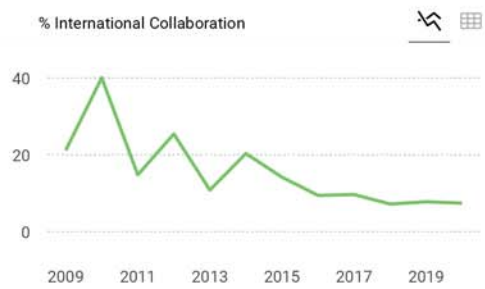

IOP Conference Series: Materials Science and...

Not yet assigned quartile

SJR 2020: 0

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" style="color: red; text-decoration: none;">

```

SCImago Graphica

Explore, visually communicate and make sense of data with our **new free tool**.

Get it





Source details

IOP Conference Series: Materials Science and Engineering

Scopus coverage years: from 2009 to Present

ISSN: 1757-8981 E-ISSN: 1757-899X

Subject area: Engineering: General Engineering Materials Science: General Materials Science

Source type: Conference Proceeding

[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

CiteScore 2020

0.7



SJR 2019

0.198



SNIP 2020

0.484



[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

i Improved CiteScore methodology



CiteScore 2020 counts the citations received in 2017-2020 to articles, reviews, conference papers, book chapters and data papers published in 2017-2020, and divides this by the number of publications published in 2017-2020. [Learn more >](#)

CiteScore 2020

$$0.7 = \frac{49,696 \text{ Citations } 2017 - 2020}{68,224 \text{ Documents } 2017 - 2020}$$

Calculated on 05 May, 2021

CiteScoreTracker 2021

$$0.8 = \frac{50,627 \text{ Citations to date}}{62,145 \text{ Documents to date}}$$

Last updated on 04 August, 2021 • Updated monthly

CiteScore rank 2020

Category	Rank	Percentile
Engineering		
General Engineering	#228/297	23rd
Materials Science		
General Materials Science	#381/455	16th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

About Scopus

[What is Scopus](#)
[Content coverage](#)
[Scopus blog](#)
[Scopus API](#)
[Privacy matters](#)

Language

[日本語に切り替える](#)
[切换到简体中文](#)
[切换到繁體中文](#)
[Русский язык](#)

Customer Service

[Help](#)
[Contact us](#)

ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies.

 RELX

IOP Conference Series: Materials Science and Engineering



With the ability to publish proceedings from events of any size, *IOP Conference Series: Materials Science and Engineering* provides a comprehensive solution for materials science and engineering conferences



RSS



Sign up for new issue notifications

Table of contents

Volume 162

2016

[← Previous issue](#) [Next issue →](#)

Second International Conference on Chemical Engineering (ICCE) UNPAR 26–27 October 2016, Bandung, Indonesia

[Open all abstracts](#)

Preface

OPEN ACCESS 011001
Second International Conference on Chemical Engineering (ICCE) UNPAR
Katherine Kho
[↑ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 011002
Peer review statement
[↑ Open abstract](#) [View article](#) [PDF](#)

Invited lectures

OPEN ACCESS 012001
Product engineering and sustainability
L P B M Janssen and C H C Janssen
[↑ Open abstract](#) [View article](#) [PDF](#)

Separation Process

OPEN ACCESS 012002
Solar powered desalination system using Fresnel lens
M T B F Sales
[↑ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012003
Design of protonation constant measurement apparatus for carbon dioxide capturing solvents
S Ma'mun, E Amella, V Rahmat, D R Alwanli and D Kumlawan
[↑ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012004
Adsorption laboratory experiment for undergraduate chemical engineering: Introducing kinetic, equilibrium and thermodynamic concepts
S Muryanto and S Djatmiko Hadi
[↑ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012005
Evaluation of phase separator number in hydrodesulfurization (HDS) unit
A D Jayanti and A Indarto
[↑ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012025
Indonesian low rank coal oxidation: The effect of H₂O₂ concentration and oxidation temperature
S S Rahayu, F Rindiatl and F Agellia
[Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012026
Application of a hybrid Electrocoagulation-Fenton process in yarn dye wastewater: Kinetic study
L Riadi, L Sapel, T. Udilawati and Y.E. Agustin
[Open abstract](#) [View article](#) [PDF](#)

Fine Chemicals and Pharmaceuticals

OPEN ACCESS 012027
Pulverization of coffee silverskin extract as a source of antioxidant
S Tan, S P Kusumocahyo and D I Widiguti
[Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012028
Extraction and identification of bioactive compounds from agarwood leaves
N Y Lee, M A C Yunus, Z Idham, M S H Ruslan, A H A Aziz and N Iwansyah
[Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012029
Natural red dyes extraction on rosella petals
H M Inggird, Jaka and H Santoso
[Open abstract](#) [View article](#) [PDF](#)

Supercritical Technology

OPEN ACCESS 012030
Supercritical carbon dioxide (SC-CO₂) extraction of essential oil from *Swietenia mahagoni* seeds
N S M Norodin, L M Salleh, Hartati and N M Mustafa
[Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012031
Optimization of supercritical carbon dioxide extraction of Piper Betal Linn leaves oil and total phenolic content
A H A Aziz, M A C Yunus, N H Anas, N Y Lee, Z Idham and A Q A Razak
[Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012032
The effect of filler addition and oven temperature to the antioxidant quality in the drying of *Physalis angulata* leaf extract obtained by subcritical water extraction
R F Susanti and Desy Natalia
[Open abstract](#) [View article](#) [PDF](#)

Nanotechnology, Polymer, and Membrane Processes

OPEN ACCESS 012033
Preparation of silver nanoparticles loaded graphene oxide nanosheets for antibacterial activity
T T T Vi and S J Lee
[Open abstract](#) [View article](#) [PDF](#)
