

Periodicals

Engineering Research

Advanced Engineering Forum

Journal of Biomimetics, Biomaterials and Biomedical Engineering

Advances in Science and Technology

Applied Mechanics and Materials

International Journal of Engineering Research in Africa

Foundations of Materials Science and Engineering

Materials Science

Journal of Metastable and Nanocrystalline Materials

Journal of Nano Research

Defect and Diffusion Forum

Solid State Phenomena

Diffusion Foundations

Materials Science Forum

Key Engineering Materials

Nano Hybrids and Composites

Advanced Materials Research

Limited Collections

Specialized Collections

Retrospective Collection

Newsletter Subscription

First Name *

Last Name *


Email *

[Home](#) [Applied Mechanics and Materials](#) [Details](#)

Applied Mechanics and Materials

ISSN: 1662-748

[Volumes](#) [My eBooks](#) [Details](#) [Editorial Board](#)

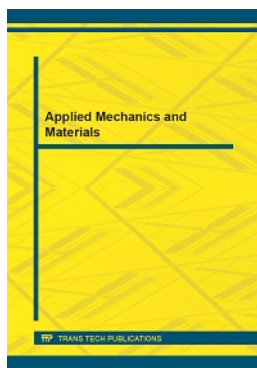

About:

"Applied Mechanics and Materials" is a peer-reviewed journal which specializes in rapid publication of proceedings of international scientific conferences, workshops and symposia as well as special volumes on topics of contemporary interest in all areas which are related to:

- 1) Research and design of mechanical systems, machines and mechanisms;
- 2) Materials engineering and technologies for manufacturing and processing;
- 3) Systems of automation and control in the areas of industrial production;
- 4) Advanced branches of mechanical engineering such as mechatronics, computer engineering and robotics.

"Applied Mechanics and Materials" publishes only complete volumes on given topics, proceedings and complete special topic volumes. We do not publish stand-alone papers by individual authors.

Authors retain the right to publish an extended, significantly updated version in another periodical.

Abstracted/Indexed in:

SCImago Journal & Country Rank (SJR) www.scimagojr.com.

Inspec (IET, Institution of Engineering Technology) www.theiet.org.

Chemical Abstracts Service (CAS) www.cas.org.

Google Scholar scholar.google.com.

NASA Astrophysics Data System (ADS) <http://www.adsabs.harvard.edu/>.

Cambridge Scientific Abstracts (CSA) www.csa.com.

ProQuest www.proquest.com.

Ulrichsweb www.proquest.com/products-services/Ulrichsweb.html.

EBSCOhost Research Databases www.ebscohost.com/.

CiteSeerX citeseerx.ist.psu.edu.

Zetoc zetoc.jisc.ac.uk.

Index Copernicus Journals Master List www.indexcopernicus.com.

WorldCat (OCLC) www.worldcat.org.

ISSN print 1660-9336 ISSN cd 2297-8941 ISSN web 1662-7482

Additional Information:

Please ask for additional information: amm@scientific.net


Subscription

Irregular: approx. 20-30 Volumes per year.

Rates 2018 for:

- Web only: EUR 1121,00 per year,

- Print (+free WEB): EUR 2235,00 (+Postage EUR 510,00)



Share:

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

GET ACCESS

SYSTEM GUIDE

DISTRIBUTORS

SUPPLEMENTS

ABOUT US

POLICY &

ETHICS


CONTACT US

IMPRINT & PRIVACY

POLICY

SITEMAP

Scientific.Net is a registered brand of Trans Tech Publications Inc.
© 2018 by Trans Tech Publications Inc. All Rights Reserved



Periodicals

Engineering Research

Advanced Engineering Forum

Journal of Biomimetics, Biomaterials and Biomedical Engineering

Advances in Science and Technology

Applied Mechanics and Materials

International Journal of Engineering Research in Africa

Foundations of Materials Science and Engineering

Materials Science

Journal of Metastable and Nanocrystalline Materials

Journal of Nano Research

Defect and Diffusion Forum

Solid State Phenomena

Diffusion Foundations

Materials Science Forum

Key Engineering Materials

Nano Hybrids and Composites

Advanced Materials Research

Limited Collections

Specialized Collections

Retrospective Collection

Newsletter Subscription

First Name *

Last Name *

Email *

Applied Mechanics and Materials

ISSN: 1662-748

VolumesMy eBooksDetailsEditorial Board

Editor(s) in Chief

Prof. Xipeng Xu

SEND MESSAGE

Huaqiao University, Research Institute of Manufacturing Engineering at Huaqiao University; No.668, Jimei Road, Xiamen, China, 361021;

Editorial Board

Prof. Ezio Cadoni

SEND MESSAGE

University of Applied Sciences of Southern Switzerland, Department for Construction, Environment and Design, DynaMat Laboratory, SUPSI-DACD; Campus Trevano, Canobbio, 6952, Switzerland;

Dr. Yuan Sheng Cheng

SEND MESSAGE

Harbin Institute of Technology, School of Materials Science and Technology; P.O. Box 435, Harbin, China, 150001;

Dr. D.A. Chinakhov

SEND MESSAGE

National Research Tomsk Polytechnic University, Yurga Institute of Technology (Branch); Leningradskaya 26, Yurga, Russian Federation, 652055;

Prof. Oana Dodun

SEND MESSAGE

Gheorghe Asachi Technical University of Iași, Department of Machine Manufacturing Technology; D. Mangeron Blvd, 39A, Iași, 700050, Romania;

Prof. Grigore Gogu

SEND MESSAGE

Institut Français de Mécanique Avancée, Campus de Clermont-Ferrand/les Cézeaux, CS 20265; Clermont-Ferrand, 63175, France;

Dr. Tibor Krenický

SEND MESSAGE

Technical University of Košice, Faculty of Manufacturing Technologies with a Seat in Prešov; Bayerova 1, Presov, 080 01, Slovakia;

Dr. Rozli Zulkifli

SEND MESSAGE

Universiti Kebangsaan Malaysia, Department of Mechanical and Materials Engineering, Faculty of Engineering and Built Environment; Bangi, Malaysia, 43600;

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

GET ACCESS

SYSTEM GUIDE

DISTRIBUTORS

SUPPLEMENTS

ABOUT US

POLICY &

ETHICS

CONTACT US

IMPRINT & PRIVACY

POLICY

SITEMAP

Scientific.Net is a registered brand of Trans Tech Publications Inc.
© 2018 by Trans Tech Publications Inc. All Rights Reserved

Paper Titles

Trailing Edge Deformation Mechanism for Active Variable - Camber Wind Turbine Blade
p.444

Effect of Material and Process Parameter on Dimensions of Rolled External Threads
p.453

The Emergy Value Assessment of Municipal Waste Management in Yogyakarta, Indonesia
p.461

Evaluation of the Effect of Application of Air Jet Cooling and Cooled-Air Jet Cooling on Machining Characteristics of St 60 Steel
p.468

Simulation of Semi-Active the Blank Holder Force Control to Prevent Wrinkling and Cracking in Deep Drawing Process
p.473

System Architecture and FPGA Embedding of Compact Fuzzy Logic Controller for Arm Robot Joints
p.480

Organizational Culture in Manufacturing Company: Study Case of Small and Medium Sized

Enterprises in Central Java, Indonesia
p.486

Development Machining of Titanium Alloys: A Review
p.492

Modal and Harmonic Response Analysis: Linear-Approach Simulation to Predict the Influence of Granular Stiffeners on Dynamic Stiffness of Box-Shaped Workpiece for Increasing Stability Limit against Chatter
p.501

[Home](#) [Applied Mechanics and Materials](#) [Advances in Applied Mechanics and Materials](#) [Simulation of Semi-Active the Blank Holder Force...](#)

Simulation of Semi-Active the Blank Holder Force Control to Prevent Wrinkling and Cracking in Deep Drawing Process

Abstract:



This paper presents simulation of drawing force and thickness deformation in deep drawing which employs semi-active blank holder force system, to solve the problem of cracking and wrinkling. The method of slab with feed back control failure criteria, was employed to make the modeling system and the semi-active blank holder to prevent wrinkling and cracking in forming low carbon steel sheet, without lubrication ($\mu=0.4$). In this study, the mechanical properties of the material were chosen since they equivalent those of low carbon steel with its thickness of 0.2 mm, $k = 572 \text{ N/mm}^2$, $UTS = 391 \text{ N/mm}$ yield stress = 309 N/mm^2 and $n = 0.2$. The diameter and the depth of the cylindrical cup-shaped product were 40 mm and 10 mm, respectively. Results from simulation have shown that the semi-active blank holder system can control very responsive against changing of deformation condition. The optimum of initial blank holder force is approximately 3000 N up to 4000 N. In the early stages (initial stroke), blank holder force system could be responsive to prevent cracking, and at the end of the punch stroke, it is very effective to prevent wrinkling. Simulation of semi-active blank holder force control system is excellent in model formation to prevent cracking and wrinkling.

Info:

Periodical: [Applied Mechanics and Materials](#) (Volume 493)

Main Theme: [Advances in Applied Mechanics and Materials](#)

Edited by: [Bambang Pramujati](#)

Pages: **473-479**

DOI: [10.4028/www.scientific.net/AMM.493.473](#)

Citation: **S. Candra et al., "Simulation of Semi-Active the Blank Holder Force Control to Prevent Wrinkling and Cracking in Deep Drawing Process", Applied Mechanics and Materials, Vol. 493, pp. 473-479, 2014**

Online since: **January 2014**

Authors: [Susila Candra](#), [I. Made Londen Batan](#), [Wajan Berata](#), [Agus Sigit Pramono](#)

Keywords: [Blank Holder](#), [Cracking](#), [Deep Drawing](#), [Wrinkling](#)

Export: [RIS](#), [BibTeX](#)

Price: **\$38.00**

Permissions: [Request Permissions](#)

Share:

[ADD TO CART](#)

References

Cited by

Related Articles

Simulation of Semi-Active the Blank Holder Force Control to Prevent Wrinkling and Cracking in Deep Drawing Process

Susila Candra^{1,a}, I Made Londen Batan^{1,b}, Wajan Berata^{1,c}, Agus Sigit P^{1,d}

¹Mechanical Engineering, Institute of Technology Sepuluh Nopember (ITS), Indonesia

^asusilac@yahoo.com, ^blondbatan@me.its.ac.id, ^cwayanb@me.its.ac.id,
^dpramono@me.its.ac.id

Keywords: deep drawing, blank holder, cracking, wrinkling.

Abstract. This paper presents simulation of drawing force and thickness deformation in deep drawing which employs semi-active blank holder force control system, to solve the problem of cracking and wrinkling. The method of slab with feed back control failure criteria, was employed to make the modeling system and the semi-active blank holder to prevent wrinkling and cracking in forming low carbon steel sheet, without lubrication ($\mu=0.4$). In this study, the mechanical properties of the material were chosen since that they equivalent to those of low carbon steel with its thickness of 0.2 mm, $K = 572 \text{ N/mm}^2$, $UTS = 391 \text{ N/mm}^2$, yield stress = 309 N/mm^2 and $n = 0.2$. The diameter and the depth of the cylindrical cup-shaped product were 40 mm and 10 mm, respectively. Results from simulation have shown that the semi-active blank holder system can control very responsive against changing of deformation condition. The optimum of initial blank holder force is approximately 3000 N up to 4000 N. In the early stages (initial stroke), blank holder force system could be responsive to prevent cracking, and at the end of the punch stroke, it is very effective to prevent wrinkling. Simulation of semi-active blank holder force control system is excellent in model formation to prevent cracking and wrinkling.

Introduction

The blank holder force is one of the variabel process in deep drawing process, which is very important to be checked further, in order to prevent cracking and wrinkling. Previous research has discussed the determination of blank holder force constantly linear [1] and aims to prevent one of a defect cracks or wrinkles only.

Research conducted by Yagami and Manabe [2], investigated the effect of the blank holder force application against the condition of gap. A larger gap could increase a material flow in tangential direction, and a magnitude of tangential stresses, consequently this condition would affect a wrinkling in the flange. M Gavas and M. Izciler [3][4][7] suggested that the optimum gap is no more than 180% of the material initial thickness, to prevent wrinkling. While Lin Zhong-qin [5], provides information that the value of flange wrinkling height (FWH) and side wall wrinkling height (SWH), should not exceed more than 115% of the initial material thickness. Furthermore, Rode Ibrahim Demirci, Cemal Esner, Mustafa Yasar [5][6], investigated cracking criteria in deep drawing. According to their research informed, the cracking would appear, when the deep drawing force did not exceed the maximum strength of material or no higher than tensile strength of material [5][6][8][9][10][11], and the radial material flow was not very obstructed.

With variable assignment processes data information on the research above, the method to set blank holder force system still using open loop blank holder control system. And it is only used to prevent one of the defective product. Blank holder force is not being set by close loop control system by considering all the factors that lead to wrinkling and cracking.

Based on the literature above, the purpose of this paper is to demonstrate a modelling and a simulation systems by setting the blank holder force control semi-active to prevent both wrinkling and cracking. Furthermore these systems could responsive to real conditions of formation and finally it could prevent cracking and wrinkling. Validation of the simulation by comparing the results with Lin's and Gavas's experiment, related to the condition of Gap criteria and enhancement of material formability.

Modeling of Stress – Force Forming and Material Thickness Deformation.

Refer to stress of state on material, the formation of radial stress would be obtained, as shown in the figure below.

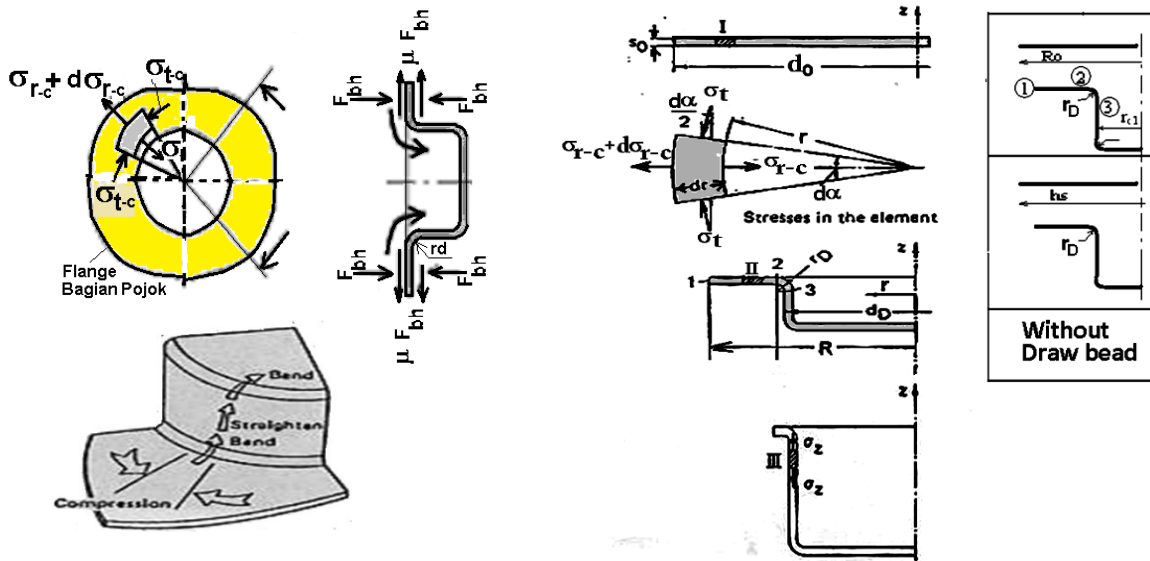


Figure 1. Stress of state and flow stress in deep drawing [10][12][13]

Radial stresses of deformation in the radial direction can be estimated with equation [13]:

$$\sigma_{r-c} = e^{\mu\alpha} \left\{ 1.15\sigma_I \ln\left(\frac{d_1}{d_m}\right) + \left(\frac{2\mu F_{Bhc}}{\pi d_1 s_0}\right) \right\} + \frac{\sigma_{II} s_0}{2r_D} \quad (1)$$

where: μ is friction coefficient; σ_I is mean flow stress on flange (point 1-2); $\sigma_I = [K/(\varepsilon_2 - \varepsilon_1)][\varepsilon_2^{n+1} - \varepsilon_1^{n+1}/(n+1)] = (\sigma_r - \sigma_t)$; σ_{II} is mean flow stress of material, after bending deformation on die radius; $\sigma_{II} = [0,5 K][\varepsilon_2^n + \varepsilon_3^n]$; s_0 is initial material thickness; $F_{bhcorner}$ is blank holder force; d_1 is the diameter of a flange; r_D is die radius; $d_m = d_1 + s_0$ = mean diameter of cup; α is bending angle; F_{Bhc} is blank holder force; K is the constant strength of material; n is strain rate exponential; ε is strain of material deformation.

The incremental ε_2 , ε_2 and ε_2 can be determined from the change in the forming of material, each stroke and using the assumption of constant volume. Furthermore, the deep drawing force (F_d) to produce cup can be estimated by using the following equation:

$$F_d = \pi \cdot d_m \cdot s_0 \{ \sigma_{r-c} \} \quad (2)$$

The product would crack, if the magnitude of the deep drawing force (F_d) exceed the drawing force criteria of cracking. Therefore the limiting product failure (cracking) or the cracking load can be estimated by using the following equation:

$$F_{crack} \geq F_d \text{ or } \pi \cdot d_m \cdot s_0 \cdot UTS \geq F_d \quad (3)$$

Where F_{crack} is the limiting cracking force of material; F_d is the deep drawing force; UTS is the ultimate tensile strength of material.

Failure criterion of wrinkling can be approached by comparing deformation of material thickness with the initial sheet metal, through the equation:

$$s_1 = s_{final} \geq c \cdot s_0 \quad (4)$$

where: c is multiplying factor, that it's depend on material characteristic.

While the mathematical formulations is to determine the final thickness of material is approached from the derivative formula of equation [12]:

$$s_1 = s_0 \text{ Exp } \{ [(-\sigma_r - \sigma_t)/(-\sigma_r + 2\sigma_t)] \cdot \varepsilon_2 \} \quad (5)$$

While the Blank Holder Force (F_{bh}) follows the equation: [13]

$$F_{bh} = 10^{-3} \times 2.5 [(LDR_{\text{material}} - 1)^3 + (0.005 D_o / s_o)] \text{UTS} \times \text{contact area} \quad (6)$$

where: LDR_{material} is Limiting draw ratio of material; D_o is Diameter of Blank Sheet; s_o is initial thickness; UTS is Ultimate Tensile Strength of material.

Setting of The Semi-active Blank Holder Force Simulation System

Set up of the simulation include i.e product dimensions, punch die and process conditions, shown in Figure 2 below.

Material of blank sheet: low carbon steel sheet; $K = 572 \text{ N/mm}^2$ (the constant strength of material); $n = 0.2$ (strain hardening coefficient); σ_o (yield stress) = 309 N/mm^2 ; Ultimate Tensile Strength (UTS) = 391 N/mm^2 ; $D_o = 67.99 \text{ mm}$; $d_p = 50 \text{ mm}$; $s_o = 0.2 \text{ mm}$; $r_D = \text{die radius} = 1 \text{ mm}$; punch radius (r_p) = 1 mm ; deep of product (h) = 10 mm ; coefficient of friction (μ) = 0.4 (without lubrication).



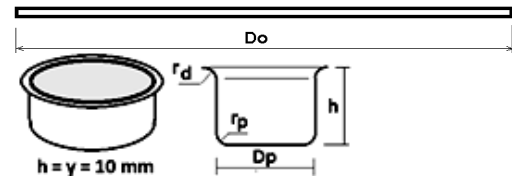


Figure 2. Process conditions, product and punch-die dimensions.


The algorithm system to calculate and to control : stress forming, deep drawing force (F_d), and thickness deformation, can be described as figure 3.

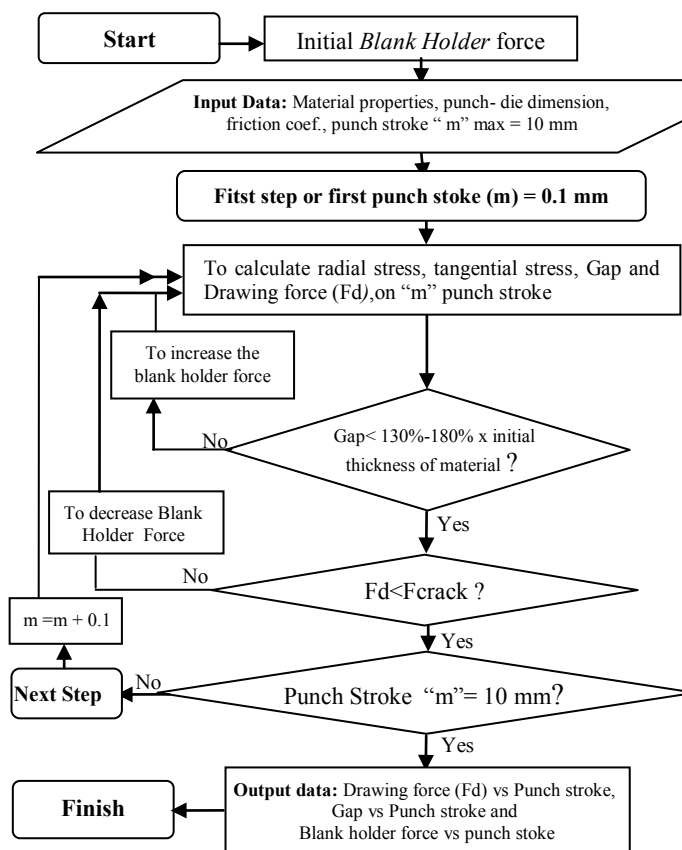

(a)

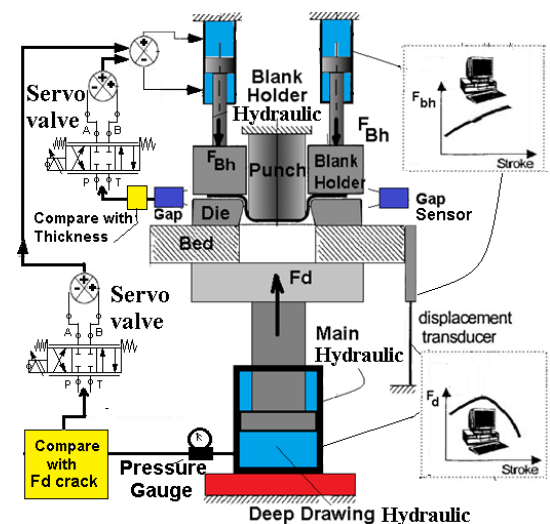

(b)

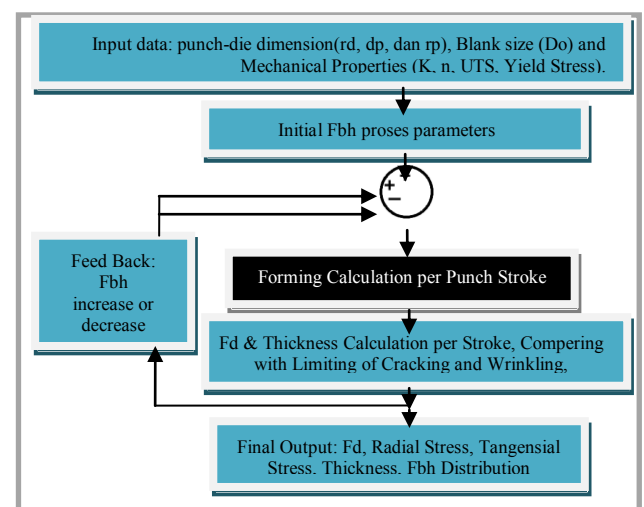

(c)


Figure 3. (a). The Algorithm of blank holder force control systems, (b). The semi-active of blank holder force control systems, (c). Modeling system of the blank holder force control system

Before the system is executed, then whole process of design and variable data imputed in simulation program. After all the data is read including the initial blank holder force, furthermore to

run the simulation system, by setting the initial blank holder force: begins 2000 N, 2500 N 3500, 3000 N, 4500 N, 4000 N and 5000 N. The results of the simulation recorded covering data: the value of the radial stress, tangential stress, drawing force (F_d) and blank holder force, every step punch stroke. The value of the product failure criteria used to make the system closes loop is gap and drawing force maximum (for wrinkling criteria and cracking criteria). The value of gap and drawing force are compared with failure criteria. Then the result of the comparison give the signal to the blank holder hydraulic and to change magnitude of the blank holder force in real-time condition (adaptive). So the blank holder force is always responsive and able to prevent wrinkling and cracking. If the final thickness of material is greater than 130% initial thickness, then ordered the system spontaneously raised the magnitude of blank holder force. Then, if the magnitude of deep drawing force is higher than the critical limit of cracking force, then the system will reduce the magnitude of blank holder force, and so the system is always recurring until the end of the forming process. The close loop control system persisted up to punch stroke until it reaches a depth of punch 10 mm. So all phases of the system is expected to prevent wrinkling and cracking adaptively.

Results and discussion


The first simulation result is a drawing force distribution with and without blank holder force control applications, as its is shown in Figure 4 a. For the whole application of blank holder 2000 N, 2500 N, 3000 N, 3500 N, 4000 N, 4500 N and 5000 N, would be indicated occurring cracking and wrinkling. If the application blank holder force too high, it would be predicted that the cracking occur at the early of punch stroke, and would be predicted of wrinkling at the end of the punch stroke. Whereas if it is applied to blank holder force is not constant, with the slope of 0.25 would increased the magnitude of blank holder force (starting from 2000 up to 5000 N), then It still not able to prevent cracking in stoke punch position 3 mm. Because in this position, the flow of material would be hampered and the radial tension increase very dramatically. Therefore the adaptive blank holder force control system on each punch stroke, related the conditions of process (drawing force and gap) is required.

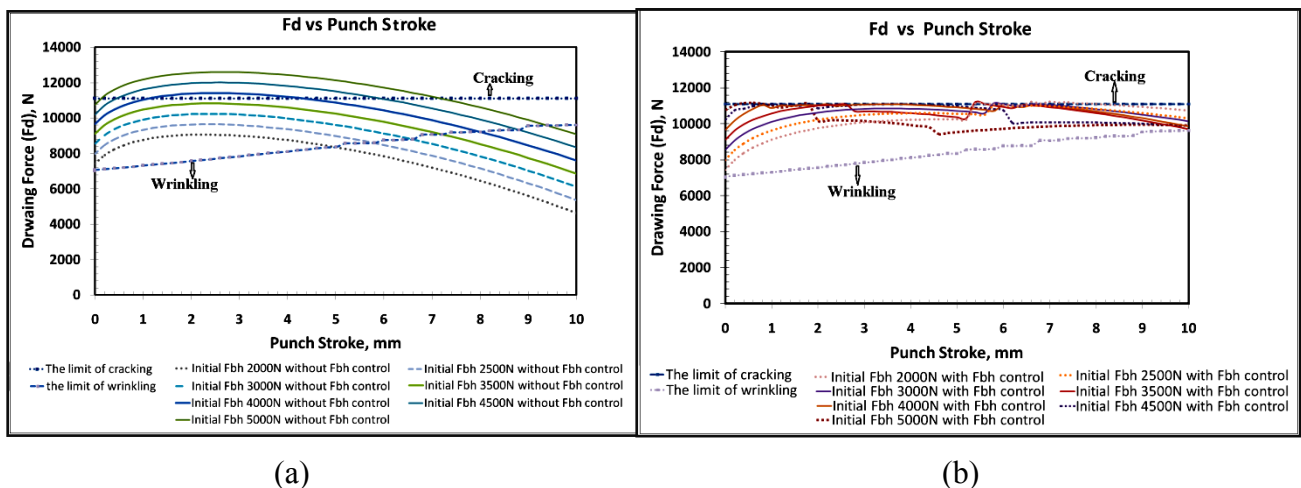

The critical forming would happen, if the radial stress and the restriction of material flow increase high enough, i.e in a depth of 1 mm - 3 mm (at the early punch stroke). Therefore, the determination of blank holder force must be controlled spontaneously, in order to prevent cracking. Whereas, at the end of stroke punch (in the depth of 6-10 mm), it very potentially occur wrinkles, so the blank holder force should be increased, to prevent wrinkling.

The simulation systems with semi-active blank holder force control showed, that if the initial blank holder force too large (4500 and 5000 N), consequently the blank holder force

corrections become very large, which should be reduced for more than 2000 N (the early of punch stroke) spontaneously, to prevent cracking. These phenomenon shown in Figure 6a and 6c.

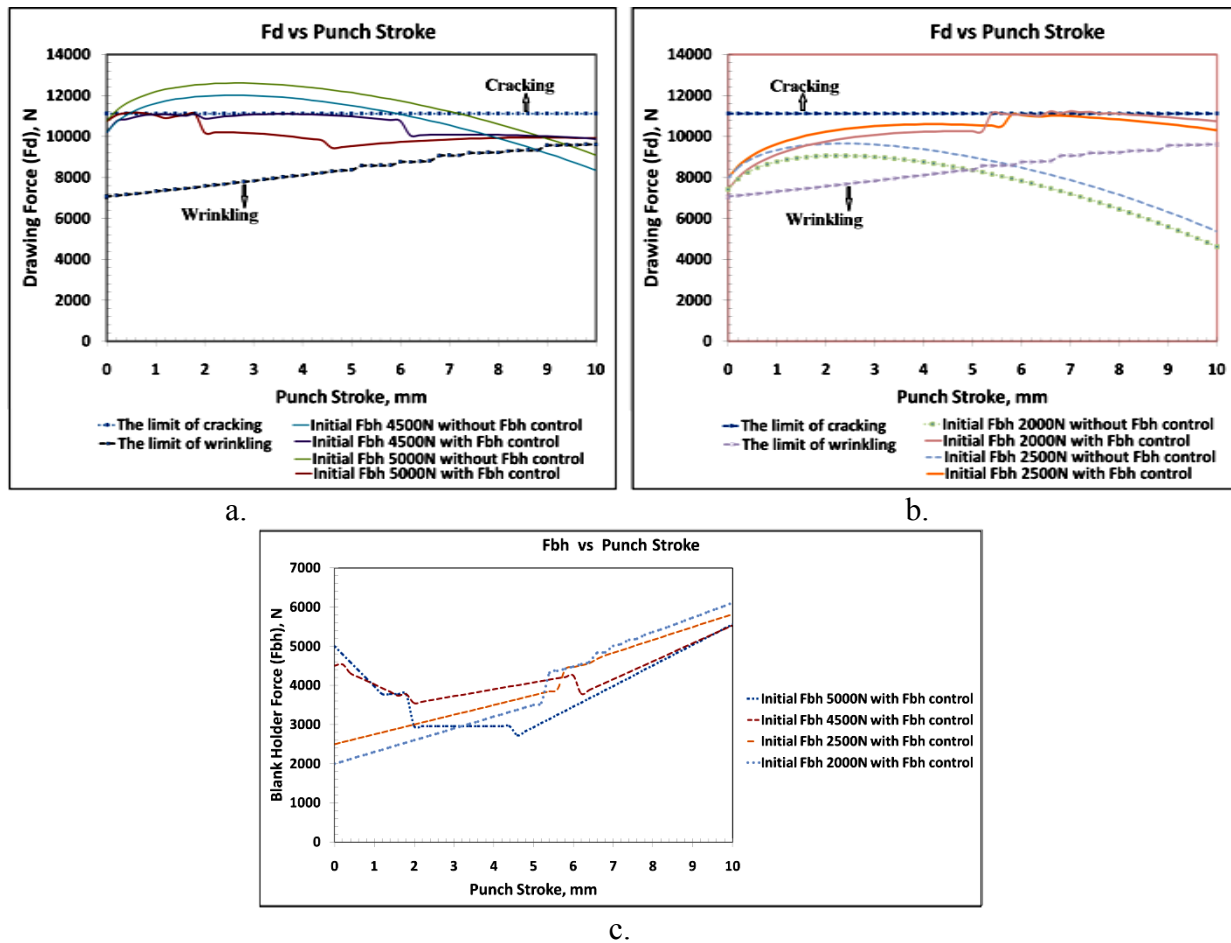

Gambar 6. Fd vs Punch Stroke with and without semi-active blank holder force control system, a. Initial Fbh 4500 N dan 5000 N, b. Initial Fbh 2000 N dan 3000 N, c. Fbh distribution

By using this system, The initial blank holder force is recommended between 3000 up to 4000 N (as figure 7.a and 7.b). So that the blank holder force would be adaptive to control the flow of materials, the radial and tangential stresses magnitude, the drawing force magnitude and gap effectively.

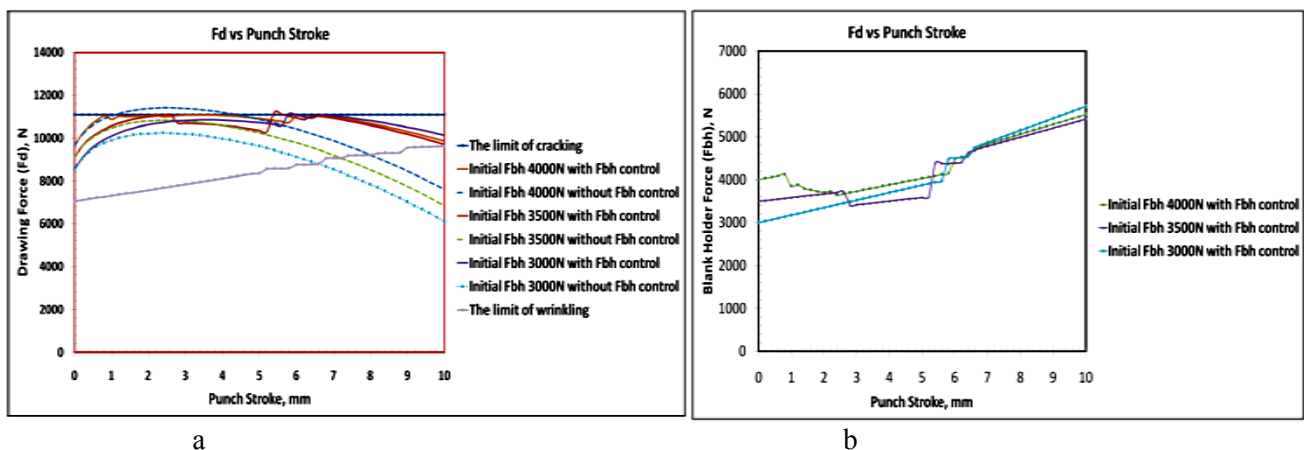


Figure 7. a. Fd distribution, with and without the semi-active blank holder force control system, b. Fbh distribution will be recommended.

The semi-active blank holder control system would be increases the material formability more than 30 %, so these system can be employed to improve Gavas's and Lin's study (experiment). And the result of simulation agree with Gavas's and Lin's gap criteria, so their method only can be considered feasible to prevent wrinkling.

Conclusion

The semi-active blank holder force control system could respond against the changing of forming process conditions and could prevent the defect of cracking and wrinkling. It indicates that the flow of material and forming stress can be controlled effectively. The optimal condition of initial blank holder force magnitude should be determined in range of 3000 - 4000 N. With the establishment of the initial blank holder force, so that the adaptive blank holder control system will be applied to control the forming process (drawing force and gap) effectively. These conditions will prevent cracking at the early punch stroke, and prevent wrinkling at the end of the punch stroke. The blank holder force magnitude will be changed in a fluctuating around 1000 N. The distribution of blank holder force in every punch stroke on the semi-active blank holder force control could be used as a reference for the process of deep drawing. The semi-active blank holder control system would be increases the material formability more than 30 %, thus it can be employed to improve Lin's and Gavas's study (experiment) [3][7], and can be considered feasible to prevent wrinkling and cracking.

References

- [1] A. Del Prete, A. Anglani, T. Primo A. Spagnolo, Computer aided simulation as valid tool for sheet hydroforming process development, *Development, International Journal Mater Form*, supplement 1 (2008) 317-322.
- [2] Yagami, K. Manabe, Y. Yamauchi, Effect of alternating blank holder motion of drawing and wrinkle elimination on deep-drawability, *Journal of Materials Processing Technology*, 187-188 (2007) 187-191.
- [3] Lin Zhong-qin, Wang Wu-rong, Chen Guan-long, A new strategy to optimize variable blank holder force towards improving the forming limits of aluminum sheet metal forming, *Journal of Materials Processing Technology*, 183 (2007) 339-346.
- [4] M. Gavas, M. Izciler, Effect of blank holder gap on deep drawing of square cups, *Journal Materials and Design*, 28 (2007) 1641-1646.
- [5] Halil Ibrahim Demirci, Cemal Esner, Mustafa Yasar, Effect of the blank holder force on drawing of aluminum alloy square cup: Theoretical and experimental investigation, *Journal of materials processing technology*, 206 (2008) 152-160.
- [6] Ravindra K. Saxena, P.M. Dixit, Prediction of flange wrinkling in deep drawing process using bifurcation criterion, *Journal of Manufacturing Processes*, 12 (2010) 19-29.
- [7] M. Gavas, Deep drawing with anti-lock braking system (ABS), *Journal Mechanism and Machine Theory*, 41 (2006) 1467-1476.
- [8] M. Gavas, Increasing the drawing height of conical square cups using anti-lock braking system (ABS), *Journal of Mechanical Science and Technology*, 23 (2009) 3079-3087.
- [9] Soren Tommerup, Benny Endelt, Experimental verification of a deep drawing tool system for adaptive blank holder pressure distribution, *Journal of Materials Processing Tech.*, 212 (2012) 2529-2540
- [10] Benny Endelt, Soren Tommerup, Joachim Danckert, A novel feedback control system – Controlling the material flow in deep drawing using distributed blank-holder force, *Journal of Materials Processing Technology*, 213 (2013) 36-50.

- [11] Susila Candra, I Made Londen Batan, Experimental study and analysis of the influence of drawbead against restriction and deep drawing force of rectangular cup-cans with tin plate material, *Journal of Applied Mechanic and Material*, 315 (2013) 246-251.
- [12] Susila Candra, I Made Londen Batan, Agus Sigit P, Bambang Pramujati, Simulation Of The Metal Flow in Deep Drawing Process of Cup By Using Antilock Brake Mechanic System, *Advanced Materials Research* Vol. 789 (2013) pp 367-372.
- [13] Kurt Lange, *Hand Book Of Metal Forming*, Mc Graw Hill Co., 1985

Advances in Applied Mechanics and Materials
10.4028/www.scientific.net/AMM.493

Simulation of Semi-Active the Blank Holder Force Control to Prevent Wrinkling and Cracking in Deep Drawing Process
10.4028/www.scientific.net/AMM.493.473

Author details

About Scopus Author Identifier

The Scopus Author Identifier assigns a unique number to groups of documents written by the same author via an algorithm that matches authorship based on a certain criteria. If a document cannot be confidently matched with an author identifier, it is grouped separately. In this case, you may see more than one entry for the same author.

[Print](#) [Email](#)

Candra, Susila


[Follow this Author](#)

University of Surabaya, Department of
Manufacturing Engineering, Surabaya, Indonesia
Author ID: 55655694300
Other name formats: [Candra, S.](#)

Subject area:

[Engineering](#) [Materials Science](#)

Document and citation trends:

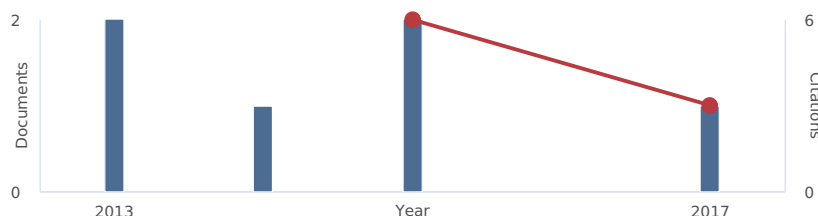
[Get citation alerts](#) [+ Add to ORCID](#) [Request author detail corrections](#)
h-index: [2](#)
[View h-graph](#)

2

Documents by author

6

[Analyze author output](#)

Total citations

9 by 5 documents

[6 Documents](#)
[Cited by 5 documents](#)
[4 co-authors](#)
[Author history](#)

View in search results format >

Sort on: [Date \(newest\)](#)
[Export all](#) [Add all to list](#) [Set document alert](#) [Set document feed](#)

Document title	Authors	Year	Source	Cited by
Modeling of the minimum variable blank holder force based on forming limit diagram (FLD) in deep drawing process Open Access View abstract ▾ Related documents	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2017	IOP Conference Series: Materials Science and Engineering	0
Analytical study and FEM simulation of the maximum varying blank holder force to prevent cracking on cylindrical cup deep drawing Open Access View abstract ▾ Related documents	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2015	Procedia CIRP	3
Modeling of critical blank holder force based on a gap limit and unbending strain energy in deep drawing process View abstract ▾ Related documents	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2015	International Journal of Engineering and Technology	0
Simulation of semi-active the blank holder force control to prevent wrinkling and cracking in deep drawing process View abstract ▾ Related documents	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2014	Applied Mechanics and Materials	2
Simulation of metal flow to investigate the application of antilock brake mechanic system in deep drawing process of cup View abstract ▾ Related documents	Candra, S., Batan, I.M.L., Pramono, A.S., Pramujati, B.	2013	Advanced Materials Research	2
Experimental study and analysis of the influence of drawbead against restriction and deep drawing force of rectangular cup-cans with tin plate material View abstract ▾ Related documents	Candra, S., Batan, I.M.L.	2013	Applied Mechanics and Materials	2

The data displayed above is compiled exclusively from documents indexed in the Scopus database. To request corrections to any inaccuracies or provide any further feedback, please use the [Author Feedback Wizard](#).

About Scopus

[What is Scopus](#)
[Content coverage](#)
[Scopus blog](#)
[Scopus API](#)
[Privacy matters](#)

Language

[English](#)
[Français](#)
[Español](#)
[Русский язык](#)

Customer Service

[Help](#)
[Contact us](#)



[Terms and conditions](#) [Privacy policy](#)

Copyright © 2018 Elsevier B.V. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

Cookies are set by this site. To decline them or learn more, visit our [Cookies page](#).

 RELX Group