



ISSN: 2212-8271

- Submit Your Paper
- View Articles
- Guide for Authors
- Track Your Paper

What is Procedia CIRP?

Procedia CIRP is an open access product focusing entirely on publishing high quality proceedings from CIRP conferences, enabling fast dissemination so that conference delegates can publish their papers in a dedicated online issue on ScienceDirect. *Procedia CIRP* is indexed in the...

Procedia CIRP

Affiliated with [CIRP](#), The International Academy for Production Engineering

> Open Access

Most Downloaded Recent Articles Most Cited

Special Issues

Service Innovation and Smart Analytics for Industry 4.0 and Big Data Environment Jay Lee | Hung-An Kao | ...

Green Supply Chain Management, Environmental Collaboration and Sustainability Performance Thoo Ai Chin | Huam Hon Tat | ...

E-commerce Logistics in Supply Chain Management: Practice Perspective Ying Yu | Xin Wang | ...

View All Articles >

[Read more](#)

Article Enrichments [↗](#)

[> Data in Brief co-submission](#)

[> Interactive Plot Viewer](#)

[> MethodsX co-submission](#)

Related Links [↗](#)

[> Author Stats \[↗\]\(#\) ⓘ](#)

[> Publishing Campus \[↗\]\(#\)](#)

[> Author Services](#)

[> Try out personalized alert features \[↗\]\(#\)](#)

Procedia CIRP

Readers

[View Articles \[↗\]\(#\)](#)

[Volume/ Issue Alert \[↗\]\(#\)](#)

[Personalized](#)

[Recommendations \[↗\]\(#\)](#)

[User rights](#)

Authors

[Author Information Pack](#)

[Submit Your Paper \[↗\]\(#\)](#)

[Track Your Paper \[↗\]\(#\)](#)

[Early Career](#)

[Resources](#)

[Support Center \[↗\]\(#\)](#)

Librarians

Editors

[Publishing Ethics Resource Kit](#)

[↓ Guest Editor Guide](#)

[↓ FTP Guide](#)

[↓ Guest Editor EES](#)

[Instructions](#)

[Guest Editors](#)

Reviewers

[Login as Reviewer](#) ↗

[Reviewer Guidelines](#)

[Reviewer Recognition](#)

[Support Center](#) ↗

Advertisers Media

[Information](#)

Societies



ELSEVIER

Copyright © 2018 Elsevier B.V.

[Advertising](#) - [Careers](#) - [Feedback](#) - [Site map](#) - [Terms and](#)

[Conditions](#) - [Privacy Policy](#)

Cookies are used by this site. To decline or learn more, visit our [Cookies](#) page.

Sign in



Download full text in

PDF

Export



Advanced



Procedia CIRP

Volume 26, 2015,

Pages 548-553

open access

Recommended
articles

Citing articles

Analytical Study and FEM Simulation of the Maximum Varying Blank Holder Force to Prevent Cracking on Cylindrical Cup Deep Drawing ☆

Susila Candra ^{b, c} , I Made Londen Batan ^a, Wajan Berata ^a, Agus Sigit Pramono ^a

[Show more](#)<https://doi.org/10.1016/j.procir.2014.08.018>[Get rights and content](#)Under a Creative Commons [license](#)

Abstract

This Research is aimed to predict the maximum varying blank holder force (VBHF) over the punch stroke in order to eliminate cracks on cup deep drawing product. The constant blank holder force during the process, it's frequently not capable to prevent cracking

capable to prevent cracking, effectively. Using the slab method with assuming a constant volume of material, the simple analytical approach of maximum VBHF, has been conducted under the failure deformation and cracking criteria on every stage punch stroke. The cracking criteria are based on the maximum strength of materials. Steel sheet of SPCD grade, thickness 0.2 mm was used in this study. And the diameter of the cylindrical cup-shaped product was 40 mm. The analytic calculation of the maximum VBHF has been compared to FEM simulations, and its effects in the prevention of cracking. Analytical Results of maximum VBHF, not much different with FEM simulation. Compared to the application of the constant blank holder force, VBHF can be quite effective for preventing the occurrence of cracking and increasing the formability of deep drawing.




Previous article in issue

Next article in issue



Keywords

blank holder force: deep drawing process: cracking; FEM; formability





[Download full text in PDF](#)

- ☆ Peer-review under responsibility of Assembly Technology and Factory Management/Technische Universität Berlin.

Copyright © 2015 The Authors. Published by Elsevier B.V.

ELSEVIER

About ScienceDirect Remote access

Shopping cart Contact and support

Terms and conditions Privacy policy

Cookies are used by this site. For more information, visit the [cookies page](#).

Copyright © 2018 Elsevier B.V. or its licensors or contributors. ScienceDirect ® is a registered trademark of Elsevier B.V.

 **RELX** Group™

Sign in

Keywords

Author name

Procedia C

Volume

Issue

Find



Advanced search



Procedia CIRP

OPEN ACCESS



12th Global Conference on Sustainable Manufacturing – Emerging Potentials

Previous
vol/issue

Next

vol/issue



Edited by Günther Seliger, Noordin Mohd. Yusof
Volume 26, Pages 1-796 (2015)



Download PDFs



Export

Assessment




Back to Intuition: Proposal for a
Performance Indicators Framework to
Facilitate Eco-factories Management and
Benchmarking

Open access - Original research article

Pages 1-6

Paola Fantini, Claudio Palasciano, Marco Taisch

 [Download PDF](#) [Article preview](#) 

The Incorporation of Sustainability Indicators into a Performance Measurement System

[Open access](#) - Original research article

Pages 7-12

Vanessa Nappi, Henrique Rozenfeld


 [Download PDF](#) [Article preview](#) 

Review of Existing Sustainability Assessment Methods for Malaysian Palm Oil Production

[Open access](#) - Original research article

Pages 13-18

Chye Ing Lim, Wahidul Biswas, Yudi Samyudia



 [Download PDF](#) [Article preview](#) 

Key Performance Indicators for Sustainable Manufacturing Evaluation in Cement Industry

[Open access](#) - Original research article

Pages 19-23

Elita Amrina, Annike Lutfia Vilsa

 [Download PDF](#) [Article preview](#) 

Selection Criteria for Suitable Indicators for Value Creation Starting with a Look at the Environmental Dimension

[Open access](#) - Original research article

Pages 24-29

Kirana Wolf, René Scheumann, Nikolay Minkov, Ya-Ju Chang, ... Matthias Finkbeiner



 [Download PDF](#) [Article preview](#) 

Environmental Safety of the Region: New Approach to Assessment

[Open access](#) - Original research article

Pages 30-34

Vladimir V. Glinskiy, Lyudmila K. Serga, Mariya S. Khvan



 [Download PDF](#) [Article preview](#) 

Proposed Framework for Assessing the Sustainability of Membrane Life Cycle

[Open access](#) - Original research article

Pages 35-39

Salwa Mahmood, Muhamad Zameri Mat Saman, Noordin Mohd Yusof

 [Download PDF](#) [Article preview](#) 

Awareness

Interpretive Structural Modeling Approach for Development of Electric Vehicle Market in India

[Open access](#) - Original research article

Pages 40-45

A.K. Digalwar, Ganneri Giridhar



 [Download PDF](#) [Article preview](#) 

Open Production: Chances for Social Sustainability in Manufacturing

[Open access](#) - Original research article

Pages 46-51

S. Basmer, S. Buxbaum-Conradi, P. Krenz, T. Redlich, ... F.-L. Bruhns

 [Download PDF](#) [Article preview](#) 



Enhancing Technological Innovation with the Implementation of a Sustainable

Manufacturing Community

[Open access](#) - Original research article

Pages 52-57

M. Severengiz, J. Seidel, J.G. Steingrímsson, G. Seliger


 [Download PDF](#) [Article preview](#) 

Graphical Visualization of Sustainable Manufacturing Aspects for Knowledge Transfer to Public Audience

[Open access](#) - Original research article

Pages 58-63

Wei Min Wang, Lars Wolter, Kai Lindow, Rainer Stark



 [Download PDF](#) [Article preview](#) 

Sustainability Awareness in Industrial Organizations

[Open access](#) - Original research article

Pages 64-69

Ibrahim H. Garbie

 [Download PDF](#) [Article preview](#) 



Design

Multi-criteria Decision Making as a Tool for Sustainable Product Development – Benefits and Obstacles

[Open access](#) - Original research article

Pages 70-75

Tom Buchert, Sabrina Neugebauer, Sebastian Schenker, Kai Lindow, Rainer Stark

 [Download PDF](#) [Article preview](#) 

Set-based Design Method for Multi-objective Structural Design with Conflicting Performances Under Topological Change

[Open access](#) - Original research article

Pages 76-81

Naoko Sasaki, Haruo Ishikawa



 [Download PDF](#) [Article preview](#) 

**A New Approach for the Transition
between QFD Phases**

[Open access](#) - Original research article

Pages 82-86

Y. Moubachir, D. Bouami



 [Download PDF](#) [Article preview](#) 

**Sustainable Manufacturing based
Decision Support Model for Product
Design and Development Process**

[Open access](#) - Original research article

Pages 87-92

A.K. Kulatunga, N. Karunatilake, N. Weerasinghe, R.K.
Ihalawatta



 [Download PDF](#) [Article preview](#) 

**The Role of Additive Manufacturing
Technology in Job Creation: An
Exploratory Case Study of Suppliers of
Additive Manufacturing in Sweden**

[Open access](#) - Original research article

Pages 93-98

Babak Kianian, Sam Tavassoli, Tobias C. Larsson

 [Download PDF](#) [Article preview](#) 

**Key Determinants of Sustainable Product
Design and Manufacturing**

[Open access](#) - Original research article

Pages 99-102

Sumit Gupta, G.S. Dangayach, Amit Kumar Singh

[Download PDF](#)[Article preview](#)

Education and Training

A New Human-centric Factory Model

[Open access](#) - Original research article

Pages 103-108

Gökan May, Marco Taisch, Andrea Bettoni, Omid Maghazei, ... Bojan Stahl

[Download PDF](#)[Article preview](#)

Industry-Academia Partnership for Sustainable Development in Palestine

[Open access](#) - Original research article

Pages 109-114

Ahmed Abu Hanieh, Sadiq AbdElall, Peter Krajnik, Afif Hasan

[Download PDF](#)[Article preview](#)

Adaptive Qualification and Assistance Modules for Manual Assembly Workplaces

[Open access](#) - Original research article

Pages 115-120

The Duy Nguyen, Randy McFarland, Martin Kleinsorge, Jörg Krüger, Günther Seliger

[Download PDF](#)[Article preview](#)

Gamification in Factory Management Education – A Case Study with Lego Mindstorms

[Open access](#) - Original research article

Pages 121-126

Bastian C. Müller, Carsten Reise, Günther Seliger


[Download PDF](#)[Article preview](#)

- The Impact of Goal-setting on Worker Performance - Empirical Evidence from a Real-effort Production Experiment

[Open access](#) - Original research article

Pages 127-132

Sven Asmus, Florian Karl, Alwine Mohnen, Gunther Reinhart

 [Download PDF](#) [Article preview](#) 



Energy Management

- Method for Selecting Improvement Measures for Discrete Production Environments Using an Extended Energy Value Stream Model

[Open access](#) - Original research article

Pages 133-138

J. Fischer, N. Weinert, C. Herrmann

 [Download PDF](#) [Article preview](#) 

- Towards Energy Management in Production Planning Software Based on Energy Consumption as a Planning Resource

[Open access](#) - Original research article

Pages 139-144

S. Bougain, D. Gerhard, C. Nigischer, S. Uğurlu

 [Download PDF](#) [Article preview](#) 

- Energy Saving Effect Mapping of Redundant Actuation in Workspace

[Open access](#) - Original research article

Pages 145-149

Giuk Lee, Sumin Park, Hongmin Kim, Jayil Jeong, Jongwon Kim



 [Download PDF](#) [Article preview](#) 

E|Benchmark – A Pioneering Method for Process Planning and Sustainable Manufacturing Strategies

Open access - Original research article

Pages 150-155

S. Kreitlein, S. Spreng, J. Franke



 [Download PDF](#) [Article preview](#) 

Implementing Energy Management System to Increase Energy Efficiency in Manufacturing Companies

Open access - Original research article

Pages 156-161

T. Javied, T. Rackow, J. Franke



 [Download PDF](#) [Article preview](#) 

Performance Comparison of Three Common Proton Exchange Membranes for Sustainable Bioenergy Production in Microbial Fuel Cell

Open access - Original research article

Pages 162-166

Mostafa Ghasemi, Elnaz Halakoo, Mehdi Sedighi, Javed Alam, Majid Sadeqzadeh

 [Download PDF](#) [Article preview](#) 

Entrepreneurship

Open Community Manufacturing – Development Challenge as a Concept for Value Creation for Sustainable Manufacturing in South Africa

Open access - Original research article

Pages 167-172

A. Rebensdorf, A. Gergert, G.A. Oosthuizen, S. Böhm



 [Download PDF](#) [Article preview](#) 

Addressing Resource Over-exploitation
Via Cooperative Institutions: Examining
How Technology Roadmapping Could
Contribute

[Open access](#) - Original research article

Pages 173-178

Elliott More, Z. Ergun Gungor, Robert Phaal, David
Probert

 [Download PDF](#) [Article preview](#) 

A Simulation-based Framework for
Improving the Ecological and Economic
Transparency in Multi-variant
Production

[Open access](#) - Original research article

Pages 179-184

Andreas Kruse, Steffen Butzer, Tom Drews, Rolf
Steinhilper



 [Download PDF](#) [Article preview](#) 

Support of Innovation Networks in
Manufacturing Industries Through
Identification of Sustainable
Collaboration Potential and Best-Practice
Transfer

[Open access](#) - Original research article

Pages 185-189

Holger Kohl, Ronald Orth, Oliver Riebartsch, Mila
Galeitzke, Jan-Patrick Cap

 [Download PDF](#) [Article preview](#) 

The Impact of Sustainable
Manufacturing Practices and Innovation
Performance on Economic Sustainability

[Open access](#) - Original research article

Pages 190-195

Norsiah Hami, Mohd Razali Muhamad, Zuhriah Ebrahim

 [Download PDF](#) [Article preview](#) 

Towards Sustainable Development by Creation of Green Social Entrepreneur's Communities

[Open access](#) - Original research article

Pages 196-201

Ali Zahedi, Ralf Otterpohl

 [Download PDF](#) [Article preview](#) 

Pathways for Sustainable Technology Development – The Case of Bicycle Mobility in Berlin

[Open access](#) - Original research article

Pages 202-207

P. Gausemeier, J. Seidel, T. Riedelsheimer, G. Seliger

 [Download PDF](#) [Article preview](#) 

Equipment

Vibration Measurements of Clinched Joints

[Open access](#) - Original research article

Pages 208-211

X. He, Y. Zhang, H. Cun, S. Yuan, ... K. Zeng

 [Download PDF](#) [Article preview](#) 

Assessment on Tracking Performance of Cascade P/PI, NPID and NCasFF Controller for Precise Positioning of XY Table Ballscrew Drive System

[Open access](#) - Original research article

Pages 212-216

L. Abdullah, Z. Jamaludin, M.N. Maslan, J. Jamaludin,

... T.H. Chiew



[Download PDF](#)

[Article preview](#)

Developing Energy Estimation Model Based on Sustainability KPI of Machine Tools

[Open access](#) - Original research article

Pages 217-222

Jumyung Um, Adam Gontarz, Ian Stroud



[Download PDF](#)

[Article preview](#)

Quasi-linearization Approach for the Under-actuated Robots

[Open access](#) - Original research article

Pages 223-228

Ahmad Albalasie, Arne Glodde, Guenther Seliger, Ahmed Abu Hanieh



[Download PDF](#)

[Article preview](#)

Implementation

Creating an Environmentally Sustainable Food Factory: A Case Study of the Lighthouse Project at Nestlé

[Open access](#) - Original research article

Pages 229-234

J.H. Miah, A. Griffiths, R. McNeill, I. Poonaji, ... J. Sadhukhan



[Download PDF](#)

[Article preview](#)

Energy Flexible Production: Saving Electricity Expenditures by Adjusting the Production Plan

[Open access](#) - Original research article

Pages 235-240

T. Rackow, J. Kohl, A. Canzaniello, P. Schuderer, J.

Franke



[Download PDF](#)

[Article preview](#)

- Integrating Energy Efficiency into Industrial Strategy – A Case Study from the European Aerospace Sector

[Open access](#) - Original research article

Pages 241-246

P.A.V. Lunt, P.D. Ball, S. Kaladgew



[Download PDF](#)

[Article preview](#)

- Production Layout Optimization for Small and Medium Scale Food Industry

[Open access](#) - Original research article

Pages 247-251

Yosra Ojaghi, Alireza Khademi, Noordin Mohd Yusof, Nafiseh Ghorbani Renani, Syed Ahmad Helmi bin Syed Hassan



[Download PDF](#)

[Article preview](#)

- Standard Verification Test for Industrialised Building System (IBS) Repetitive Manufacturing

[Open access](#) - Original research article

Pages 252-257

Abdul Kadir Marsono, Wong Jing Ying, Masine Md. Tap, Yip Chun Chieh, Amir Haddadi



[Download PDF](#)

[Article preview](#)



Knowledge

- Pattern Recognition on Remanufacturing Automotive Component as Support Decision Making Using Mahalanobis-taguchi System

[Open access](#) - Original research article

Pages 258-263

A. Mohd Yazid, J. Khairur Rijal, M.S. Awaluddin,
Emelia Sari

 [Download PDF](#) [Article preview](#) 

**Resource Consumption Monitoring in
Manufacturing Environments**

[Open access](#) - Original research article

Pages 264-269

Adam M. Gontarz, David Hampl, Lukas Weiss, Konrad
Wegener

 [Download PDF](#) [Article preview](#) 

**Toward Pull Remanufacturing: A Case
Study on Material and Information Flow
Uncertainties at a German Engine
Remanufacturer**

[Open access](#) - Original research article

Pages 270-275

Jelena Kurilova-Palisaitiene, Erik Sundin



 [Download PDF](#) [Article preview](#) 

**Modelling of Bicycle Manufacturing via
Multi-criteria Mixed Integer
Programming**

[Open access](#) - Original research article

Pages 276-280

Sebastian Schenker, Jón Garðar Steingrímsson, Ralf
Borndörfer, Günther Seliger

 [Download PDF](#) [Article preview](#) 

**Review of Discrete-continuous Models in
Energy and Transportation**

[Open access](#) - Original research article

Pages 281-286

Ahmad Derakhshan, Alireza Khademi, Shahab

Khademi, Noordin Mohd Yusof, Muhammad Hisyam Lee

 [Download PDF](#) [Article preview](#) 

Measures and Methods for a New Taxonomy in Manufacturing Enterprises

Open access - Original research article

Pages 287-292

G. Campana, B. Cimatti

 [Download PDF](#) [Article preview](#) 


Life Cycle

Environmental and Social Life Cycle Assessment of Welding Technologies

Open access - Original research article

Pages 293-298

Ya-Ju Chang, Gunther Sproesser, Sabrina Neugebauer, Kirana Wolf, ... Matthias Finkbeiner

 [Download PDF](#) [Article preview](#) 

Process for Advanced Management and Technologies of Aircraft EOL

Open access - Original research article

Pages 299-304

C. Mascle, P. Baptiste, D. Sainte Beuve, A. Camelot


 [Download PDF](#) [Article preview](#) 

A Lean Based Overview on Sustainability of Printed Circuit Board Production Assembly

Open access - Original research article

Pages 305-310

Alireza Esfandyari, Stefan Härter, Tallal Javied, Jörg Franke

 [Download PDF](#) [Article preview](#) 

Proposed Framework for End-of-life Aircraft Recycling

[Open access](#) - Original research article

Pages 311-316

Júnior Sousa Ribeiro, Jefferson de Oliveira Gomes



[Download PDF](#)

[Article preview](#)

Logistics

Low-carbon and Economic Supplier Selection Using Life Cycle Inventory Database by Asian International Input-Output Tables

[Open access](#) - Original research article

Pages 317-322

Tetsuo Yamada, Yuta Yoshizaki, Norihiro Itsubo, Masato Inoue



[Download PDF](#)

[Article preview](#)

Sustainability Optimization for Global Supply Chain Decision-making

[Open access](#) - Original research article

Pages 323-328

Raunak Bhinge, Raphael Moser, Emanuel Moser, Gisela Lanza, David Dornfeld



[Download PDF](#)

[Article preview](#)

Multi Criteria Simulation Model for Lead Times, Costs and CO2 Emissions in a Low-carbon Supply Chain Network

[Open access](#) - Original research article

Pages 329-334

Tetsu Kawasaki, Tetsuo Yamada, Norihiro Itsubo, Masato Inoue







[Download PDF](#)

[Article preview](#)

- The Impact of Carbon Policies on Closed-loop Supply Chain Network Design**
[Open access](#) - Original research article
Pages 335-340
M. Fareeduddin, Adnan Hassan, M.N. Syed, S.Z. Selim
[PDF](#) [Download PDF](#) [Article preview](#) 

Lubrication

- Investigation of Ionic Liquids as Novel Metalworking Fluids during Minimum Quantity Lubrication Machining of a Plain Carbon Steel**
[Open access](#) - Original research article
Pages 341-345
Gyanendra Singh Goindi, Santosh Namdeo Chavan, Debaprasad Mandal, Prabir Sarkar, Anshu Dhar Jayal
[PDF](#) [Download PDF](#) [Article preview](#) 
- Performance Evaluation of Chemically Modified Crude Jatropha Oil as a Bio-based Metalworking Fluids for Machining Process**
[Open access](#) - Original research article
Pages 346-350
N. Talib, E.A. Rahim
[PDF](#) [Download PDF](#) [Article preview](#) 
- Experimental Investigation of Minimum Quantity Lubrication (MQL) as a Sustainable Cooling Technique**
[Open access](#) - Original research article
Pages 351-354
E.A. Rahim, M.R. Ibrahim, A.A. Rahim, S. Aziz, Z. Mohid

 [Download PDF](#) [Article preview](#) 

Energy Saving Potentials of High Pressure Lubricoolant Supply

[Open access](#) - Original research article

Pages 355-360

Fritz Klocke, Benjamin Döbbeler, Dieter Lung


 [Download PDF](#) [Article preview](#) 

Flushing Strategies for High Performance, Efficient and Environmentally Friendly Cutting

[Open access](#) - Original research article

Pages 361-366

P. Blau, K. Busch, M. Dix, C. Hochmuth, ... R. Wertheim

 [Download PDF](#) [Article preview](#) 

Investigation of Surface Integrity in High Speed Milling of Gamma Titanium Aluminide under Dry and Minimum Quantity Lubricant Conditions

[Open access](#) - Original research article

Pages 367-372

S. Kolahdouz, M. Hadi, B. Arezoo, S. Zamani

 [Download PDF](#) [Article preview](#) 



Machining

Scenarios in Multi-objective Optimisation of Process Parameters for Sustainable Machining

[Open access](#) - Original research article

Pages 373-378

Taoyuan Zhang, Oladele Owodunni, James Gao


 [Download PDF](#) [Article preview](#) 

**Sustainability Issues in Turning Process:
A Study in Indian Machining Industry**

[Open access](#) - Original research article

Pages 379-384

Sunil Dambhare, Samir Deshmukh, Atul Borade,
Abhijeet Digalwar, Mangesh Phate

 [Download PDF](#) [Article preview](#) 

**Assessment of Research Needs for
Sustainability of Unconventional
Machining Processes**

[Open access](#) - Original research article

Pages 385-390

J.R. Gamage, A.K.M. DeSilva



 [Download PDF](#) [Article preview](#) 

**Advancing Environmentally Conscious
Machining**

[Open access](#) - Original research article

Pages 391-396

Yogie Rinaldy Ginting, Brian Boswell, Wahidul Biswas,
Nazrul Islam



 [Download PDF](#) [Article preview](#) 

**Tool Path Generation, for Complex
Surface Machining, Using Point Cloud
Data**

[Open access](#) - Original research article

Pages 397-402

Anadil Masood, Rooha Siddiqui, Michelle Pinto, Hira
Rehman, Maqsood A. Khan



 [Download PDF](#) [Article preview](#) 

Predictive Modeling for Power Consumption in Machining Using Artificial Intelligence Techniques

[Open access](#) - Original research article

Pages 403-407

Girish Kant, Kuldip Singh Sangwan



 [Download PDF](#) [Article preview](#) 

Use of Castor Oil as Cutting Fluid in Machining of Hardened Stainless Steel with Minimum Quantity of Lubricant

[Open access](#) - Original research article

Pages 408-411

Mohamed Handawi Saad Elmunafi, D. Kurniawan, M.Y. Noordin

 [Download PDF](#) [Article preview](#) 


Maintenance

A Method for Forecasting the Running Costs of Manufacturing Technologies in Automotive Production during the Early Planning Phase

[Open access](#) - Original research article

Pages 412-417

M. Bornschlegl, S. Kreitlein, M. Bregulla, J. Franke


 [Download PDF](#) [Article preview](#) 

Sustainable Domain Value Stream Mapping (SdVSM) Framework Application in Aircraft Maintenance: A Case Study

[Open access](#) - Original research article

Pages 418-423

Nithia Kumar Kasava, Noordin Mohd Yusof, Alireza Khademi, Muhammad Zamari Mat Saman

 [Download PDF](#) [Article preview](#) 

Development of a Framework for Implementation of World-class Maintenance Systems Using Interpretive Structural Modeling Approach

[Open access](#) - Original research article

Pages 424-429

Rajesh P. Mishra, Ram Babu Kodali, Gajanand Gupta, Nidhi Mundra

 [Download PDF](#) [Article preview](#) 

Detection of Counterfeit by the Usage of Product Inherent Features

[Open access](#) - Original research article

Pages 430-435

Matthias Blankenburg, Christian Horn, Jörg Krüger

 [Download PDF](#) [Article preview](#) 

Establishing EcoReliability of Electronic Devices in Manufacturing Environments

[Open access](#) - Original research article

Pages 436-442

Andreas Middendorf, Stephan Benecke, Nils F. Nissen, Olaf Wittler, Klaus-D. Lang

 [Download PDF](#) [Article preview](#) 

Sustainable Maintenance Performance Measures: A Pilot Survey in Malaysian Automotive Companies

[Open access](#) - Original research article

Pages 443-448

Emelia Sari, Awaluddin Mohamed Shahrour, Azanizawati Ma'aram, A. Mohd Yazid

 [Download PDF](#) [Article preview](#) 

- Enabling Wider Use of Magnesium Alloys for Lightweight Applications by Improving the Formability by Groove Pressing

[Open access](#) - Original research article

Pages 449-454

Kai Soon Fong, Ming Jen Tan, Beng Wah Chua, Danno Atsushi



 [Download PDF](#) [Article preview](#) 

- The Use of Spark Plasma Sintering to Fabricate a Two-phase Material from Blended Aluminium Alloy Scrap and Gas Atomized Powder

[Open access](#) - Original research article

Pages 455-460

Dimos Paraskevas, Kim Vanmeensel, Jef Vleugels, Wim Dewulf, Joost R. Duflou



 [Download PDF](#) [Article preview](#) 

- Sustainability in Petrochemical Industry: Mixed Matrix Membranes from Polyethersulfone/Cloisite15a® for the Removal of Carbon Dioxide

[Open access](#) - Original research article

Pages 461-466

N.M. Ismail, A.F. Ismail, A. Mustafa

 [Download PDF](#) [Article preview](#) 

- Effects of Activated Charcoal on Dewaxing Time in Microwave Hybrid Heating

[Open access](#) - Original research article

Pages 467-472



[Download PDF](#)

[Article preview](#)

Production of Sustainable Energy by Carbon Nanotube/Platinum Catalyst in Microbial Fuel Cell

[Open access](#) - Original research article

Pages 473-476

Elnaz Halakoo, Alireza Khademi, Mostafa Ghasemi, Noordin Mohd Yusof, ... Ahmad Fauzi Ismail



[Download PDF](#)

[Article preview](#)

A Sustainable Direct Recycling of Aluminum Chip (AA6061) in Hot Press Forging Employing Response Surface Methodology

[Open access](#) - Original research article

Pages 477-481

S.S. Khamis, M.A. Lajis, R.A.O. Albert



[Download PDF](#)

[Article preview](#)

Performance Investigation of Transcritical Carbon Dioxide Refrigeration Cycle

[Open access](#) - Original research article

Pages 482-485

Aklilu Tesfamichael Baheta, Suhaimi Hassan, Allya Radzihan B. Reduan, Abraham D. Woldeyohannes



[Download PDF](#)

[Article preview](#)

Operations

Resource Networks: Decentralised Factory Operation Utilising Renewable Energy Sources

[Open access](#) - Original research article

Pages 486-491

Johannes Stoldt, Enrico Franz, Andreas Schlegel,
Matthias Putz



[Download PDF](#)

[Article preview](#)

Evaluating the Effects of Energy
Productivity Measures on Lean
Production Key Performance Indicators

[Open access](#) - Original research article

Pages 492-497

P. Schnellbach, G. Reinhart



[Download PDF](#)

[Article preview](#)

Green Cockpit: Transparency on Energy
Consumption in Manufacturing
Companies

[Open access](#) - Original research article

Pages 498-503

T. Rackow, T. Javied, T. Donhauser, C. Martin, ... J.
Franke



[Download PDF](#)

[Article preview](#)

Sustainability Optimization in
Manufacturing Enterprises

[Open access](#) - Original research article

Pages 504-509

Ibrahim H. Garbie



[Download PDF](#)

[Article preview](#)

Multi-objective Shop Floor Scheduling
Using Monitored Energy Data

[Open access](#) - Original research article

Pages 510-515

T. Stock, G. Seliger



[Download PDF](#)

[Article preview](#)

Developing a Start-stop Production System Concept

Open access - Original research article

Pages 516-520

P.D. Ball



Download PDF

Article preview

Processes

Development of a Reference Part for the Evaluation of Energy Efficiency in Milling Operations

Open access - Original research article

Pages 521-526

H.-H. Westermann, M. Kafara, R. Steinhilper



Download PDF

Article preview

Eco-effective Changeovers; Changing a Burden into a Manufacturing Capability

Open access - Original research article

Pages 527-532

Z.E. Gungor, S. Evans



Download PDF

Article preview

Investigation into Energy Efficiency of Outdated Cutting Machine Tools and Identification of Improvement Potentials to Promote Sustainability

Open access - Original research article

Pages 533-538

K. Kianinejad, E. Uhlmann, B. Peukert



Download PDF



Article preview

Chemo Assisted Magnetic Abrasive Finishing: Experimental Investigations

[Open access](#) - Original research article

Pages 539-543

Nitesh Sihag, Prateek Kala, Pulak M. Pandey

 [Download PDF](#) [Article preview](#) 

**Blasting with Solid Carbon Dioxide –
Investigation of Thermal and Mechanical
Removal Mechanisms**

[Open access](#) - Original research article

Pages 544-547

E. Uhlmann, R. Hollan


 [Download PDF](#) [Article preview](#) 

**Analytical Study and FEM Simulation of
the Maximum Varying Blank Holder
Force to Prevent Cracking on Cylindrical
Cup Deep Drawing**

[Open access](#) - Original research article

Pages 548-553

Susila Candra, I Made Londen Batan, Wajan Berata,
Agus Sigit Pramono



 [Download PDF](#) [Article preview](#) 

**Siliconizing Process of Mild Steel
Substrate by Using Tronoh Silica Sand
(TSS): An Experimental Investigation**

[Open access](#) - Original research article

Pages 554-559

M. Othman, F.M.Y. Yusnenti, I. MohdYusri

 [Download PDF](#) [Article preview](#) 

**Effect of Current on Characteristic for
316 Stainless Steel Welded Joint
Including Microstructure and
Mechanical Properties**

[Open access](#) - Original research article

Pages 560-564

Navid Moslemi, Norizah Redzuan, Norhayati Ahmad,
Tang Nan Hor

 [Download PDF](#) [Article preview](#) 



Remanufacturing

Towards Implementation of DfRem into the Product Development Process

[Open access](#) - Original research article

Pages 565-570

S.S. Yang, S.K. Ong, A.Y.C. Nee

 [Download PDF](#) [Article preview](#) 

  Previous page 1 of 2 Next  

ISSN: 2212-8271

Copyright © 2018 Elsevier B.V. All rights reserved

ELSEVIER

[About ScienceDirect](#) [Remote access](#)
[Shopping cart](#) [Contact and support](#)
[Terms and conditions](#) [Privacy policy](#)

Cookies are used by this site. For more information, visit the [cookies page](#).

Copyright © 2018 Elsevier B.V. or its licensors or contributors. ScienceDirect ® is a registered trademark of Elsevier B.V.

 RELX Group™

12th Global Conference on Sustainable Manufacturing

Analytical study and FEM simulation of the maximum varying blank holder force to prevent cracking on cylindrical cup deep drawing

Susila Candra^{b,c,*}, I Made Londen Batan^a, Wajan Berata^a, Agus Sigit Pramono^a

^aMechanical Engineering, Institute of Technology Sepuluh Nopember (ITS), Sukolilo Surabaya - 60111, Indonesia

^bDoctoral Student, Mechanical Engineering, Institute of Technology Sepuluh Nopember (ITS), Sukolilo Surabaya - 60111, Indonesia

^cManufacturing Engineering, University of Surabaya, Jl Ngagel Jaya Selatan 169, Surabaya - 60284, Indonesia

* Corresponding author. Tel.: +62 818 325 379 fax: +62 31 298 1151. E-mail address: susilac@yahoo.com, susila_c@ubaya.ac.id

Abstract

This Research is aimed to predict the maximum varying blank holder force (VBHF) over the punch stroke in order to eliminate cracks on cup deep drawing product. The constant blank holder force during the process, it's frequently not capable to prevent cracking, effectively. Using the slab method with assuming a constant volume of material, the simple analytical approach of maximum VBHF, has been conducted under the failure deformation and cracking criteria on every stage punch stroke. The cracking criteria are based on the maximum strength of materials. Steel sheet of SPCD grade, thickness 0.2 mm was used in this study. And the diameter of the cylindrical cup-shaped product was 40 mm. The analytic calculation of the maximum VBHF has been compared to FEM simulations, and its effects in the prevention of cracking. Analytical Results of maximum VBHF, not much different with FEM simulation. Compared to the application of the constant blank holder force, VBHF can be quite effective for preventing the occurrence of cracking and increasing the formability of deep drawing.

© 2015 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of Assembly Technology and Factory Management/Technische Universität Berlin.

Keywords: blank holder force; deep drawing process; cracking; FEM; formability

1. Introduction

Cracking is the most critical defects in deep drawing process, which caused by the radial stress and the drawing load too high. Process parameters that greatly affect the magnitude of the radial stress and drawing load is the blank holder force. In order to maintain that proses condition and to prevent cracking, the blank holder force magnitude should be controlled effectively.

Daw-kwei Leu et al. [1] conducted a study of influence of material properties and variable processes against the magnitude of drawing maximum load and the possibility of cracking. In their study, a constant blank holder force (BHF) is applied in every position of the punch stroke, so some product without cracking in special case would be difficult to achieve. T. Cwiekala et al. [2] developed a basic analysis and simulation method using multiple deformation step in order to predict and formability strain to produce a product with applying the constant BHF. Their study could become a reference regard to an analytical approach to calculating the

radial stress and thickness strain in cup deep drawing process. Other research conducted by Ravendra et al. [3], estimated the influence of design parameters include the dimension of tools, against the occurrence of the damage of the product, with the application of blank holder force set a constant value. Parametric and FEM modeling method base on forming limit had been considering the occurrence of fracture and wrinkling in cup deep drawing process. Nevertheless, the analysis by applying a constant BHF could not demonstrate for eliminating both defect wrinkling and cracking effectively. B.V.S Rao et al. [4] and Y Marumo [5], studied optimization of the constant blank holder force on cup deep drawing by using Taguchi method. Optimization of the constant blank holder force magnitude has a linear pattern on each stroke punch position. Y. Marumo et al. [5] conducted a research of influence material thickness and limiting drawing ratio (LDR) against constant blank holder force magnitude in cup deep drawing process to produce products without cracking.

Generally, the analysis and experiments on research described above, a constant blank holder force is applied in

deep drawing process, that it cannot consider to deformation of the material condition over the punch stroke. Therefore, the blank holder force cannot anticipate the dynamics of operating conditions. A good method, Z.Q. Seng et al. [6] implemented an adaptive FEM simulation method attempts to eliminate fracture by applying VBHF. Their study was using a lower and an upper bound criteria approach to eliminate product defects, with maintaining the wrinkle amplitude and maximum thinning of the material by automatically adjusting the BHF. Although specifically about the fracture (cracking) criteria could use the different criterion. S. Candra et al. [8,9] determined a variable BHF base on criteria of wrinkle height dimension and maximum strength of material for predicting the wrinkle and cracking, respectively. In practice, the criteria of maximum strength of the material which is utilized as an index of the cracking, can be easily applied to estimate the maximum drawing force, to control the blank holder equipment optimally. So the application of a defect criteria for determining of a maximum of VBHF could be examined more details.

S. Yoshihara et al. [7] investigated the formability of deep-drawing of magnesium alloy sheet by using variable BHF control. The variable BHF is determined from the LDR test by using the minimum and maximum constant BHF. The variable BHF has a profile: the low constant BHF in the early stage of processes, the increasing BHF in the middle stage of processes, and the high constant BHF at the end of the process. In fact, during the process, tangential stress will occurrence the increasing in early the punch stroke significantly, and the wrinkles will potentially appear. Thus, the BHF should be controlled carefully to anticipate the changing of the tangential and radial stress in every stage of the punch stroke. The forming stress analysis related to determine the VBHF could be further examined.

Refer to the information above, this paper propose the simple analytical approach to predict the maximum varying blank holder force (VBHF) over the punch stroke in order to avoid cracking. The analytical approach of SLAB method with assuming a constant volume of material, a plane strain and using the Tresca yield criterion, utilized for analyzing stress and strain in materials forming of sheet. The maximum VBHF is determined by using a defect criteria of the maximum strength of materials as the upper bound approach of analytical. The effects of friction and an anisotropic of material, are also considered in the analysis. By using a maximum strength of materials as the failure criteria, can be expected simultaneously also prevents wrinkle defects. Finally, the analytical calculation of the maximum VBHF, will be validated by the FEM simulation of cup deep drawing process and compared to some researches related.

1.1. The mathematical equation of the maximum VBHF

Under the equilibrium of force in a small element of the flange and ignoring friction, as shown in Figure 1, the mathematical equation of the radial stress can be written as

$$r d\sigma_r + d\alpha s_0 + \sigma_r dr - d\alpha s_0 + 2[\sigma_t]s_0 dr \sin(d\alpha/2) = 0 \tag{1}$$

Where σ_r is the radial stress, r is the inside radius at the moment, $d\alpha$ is a small segment angle of the flange, s_0 is the

initial thickness of material, and σ_t is the tangential stress in the flange.

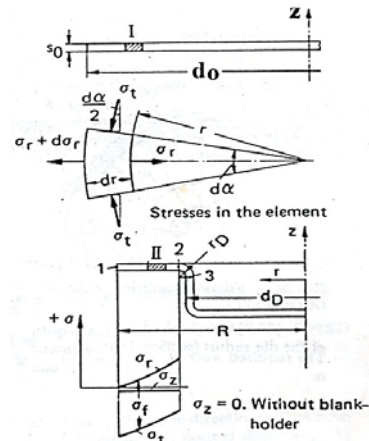


Fig. 1. The equilibrium force diagrams of the flange in a small element [12]

Because of $d\alpha/2$ is very small, then it can be considered to be $\sin(d\alpha/2) \approx d\alpha/2$, so the equation 1 becomes

$$d\sigma_r = (\sigma_t - \sigma_r) \left(\frac{dr}{r}\right) \text{ or } \sigma_r = \int_{r=R_1}^r (\sigma_r - \sigma_t) \left(\frac{dr}{r}\right) \tag{2}$$

Where R_1 is the outer flange radius a moment. Under the condition of plain strains, by using the criterion of Tresca and the definition of equivalent stress [10], the relationship of radial and tangential stress can be obtained relations as.

$$(\sigma_r - \sigma_t) = \sqrt{\frac{2(R_n + 1)}{1 + 2R_n}} \sigma_f \tag{3}$$

Where σ_f is the flow stress a moment on flange from the initial position until another position, and R_n is the mean anisotropy coefficient of the material. Substituting the equation 3 into equation 2 and then integrating it with the boundary $r = r_m$ until $r = R_1$, so the equation of ideal stress deformation on the flange over the punch stroke obtained as,

$$\sigma_{r,i} = \sqrt{\frac{2(R_n + 1)}{1 + 2R_n}} \sigma_{f,i} \ln\left(\frac{R_{1,i}}{r_m}\right) \text{ or } \sigma_{r,i} = \sqrt{\frac{2(R_n + 1)}{1 + 2R_n}} \sigma_{f,i} \ln\left(\frac{d_{1,i}}{d_m}\right) \tag{4}$$

Where $R_{1,i}$ is the outer local flange radius under the function of the punch stroke (the height of cup or h), r_m is the average radius of cylindrical cup deep drawing, $d_{1,i}$ is the outer local flange diameter under the function of the punch stroke, i is the punch stroke, d_m is the average diameter of cylindrical cup deep drawing ($d_m = d_D - s_0$), and d_D is the die diameter.

The equivalent strain can be derived from

$$\varepsilon = \sqrt{\frac{2(R_n + 1)}{1 + 2R_n}} \ln\left(\frac{R_0}{R_1}\right) \text{ or } \varepsilon = \sqrt{\frac{2(R_n + 1)}{1 + 2R_n}} \ln\left(\frac{d_0}{d_1}\right) \tag{5}$$

In order to simplify calculation of the mean flow stress on flange, the strain will be divided into two sections, at point 1 and point 2. Refer to equation 5, the equivalent strain at point 1 ($\varepsilon_{1,i}$) and point 2 ($\varepsilon_{2,i}$) can be calculated respectively by

$$\varepsilon_{1,i} = \sqrt{\frac{2(R_n+1)}{1+2R_n}} \ln\left(\frac{d_0}{d_{1,i}}\right) \text{ and } \varepsilon_{2,i} = \sqrt{\frac{2(R_n+1)}{1+2R_n}} \ln\left(\frac{d_{int,i}}{d_D+2r_d}\right) \quad (6)$$

Where d_0 is the blank size diameter (initial blank sheet), $d_{1,i}$ is the outside flange diameter-function of the punch stroke (point 1), d_D is the die diameter, r_d is the die radius and $d_{int,i}$ is unknown inside diameter-function of the punch stroke (point 2).

And then, the mean flow stress between point 1 to point 2 ($\sigma_{fmp1-2,i}$ – function position of punch stroke) can be calculated by

$$\sigma_{fmp1-2,i} = \left(\frac{1}{2}\right)K(\varepsilon_{1,i}^n + \varepsilon_{2,i}^n) \quad (7)$$

Where K is the strength coefficient of material and n is the strain hardening exponential of material.

Equation 4, can obtain equation as

$$\sigma_{r,i} = \sqrt{\frac{2(R_n+1)}{1+2R_n}} (\sigma_{fmp1-2,i}) \ln\left(\frac{d_{1,i}}{d_m}\right) \quad (8)$$

Furthermore, if the friction on the flange surface is considered, the forming equation of radial stress will be

$$\sigma_{r,i} = \left\{ \sqrt{\frac{2(R_n+1)}{1+2R_n}} (\sigma_{fmp1-2,i}) \left(\ln \frac{d_{1,i}}{d_m} \right) \right\} + \left\{ \frac{2\mu F_{bh,i}}{\pi d_{1,i} s_0} \right\} \quad (9)$$

Considering the friction on all surfaces and the tension of bending at the die radius, the radial stress equation would be

$$\sigma_{r,i} = e^{\mu\pi} \left\{ \left\{ \sqrt{\frac{2(R_n+1)}{1+2R_n}} (\sigma_{fmp1-2,i}) \left(\ln \frac{d_{1,i}}{d_m} \right) \right\} + \left\{ \frac{2\mu F_{bh,i}}{\pi d_{1,i} s_0} \right\} \right\} + \left(\sigma_{fmp2-3,i} \frac{s_0}{2r_d} \right) \quad (10)$$

Where μ is the friction coefficient, $F_{bh,i}$ is the varying blank holder force and $\sigma_{fmp2-3,i}$ is the mean flow stress in cup wall (after passing die radius).

Following the stress equation above, the drawing force ($F_{d,i}$) over the punch stroke can be obtained as,

$$F_{d,i} = \pi d_m s_0 \sigma_{r,i} \quad (11)$$

Based on the deformation of material when flows through the die radius and undergoes bending deformation, so mean flow stress can be predicted as:

$$\sigma_{fmp2-3,i} = \left(\frac{1}{2}\right)K (\varepsilon_{2,i}^n + \varepsilon_{3,i}^n) \quad (12)$$

Where $\varepsilon_{2,i}$ is the radial strain of material on flange until point 2, and $\varepsilon_{3,i}$ is the bending strain, in detail:

$$\varepsilon_{3,i} = \varepsilon_{2,i} + \sqrt{\frac{2(R_n+1)}{1+2R_n}} \ln\left(1 + \frac{s_0}{2r_d+s_0}\right) \quad (13)$$

To determine the radial stress over the punch stroke, formerly need to calculate the dimensions changing of diameter each punch stroke position. Under the condition of constant volume and refer to Figure 2, so the outer diameter of the flange and unknown in diameter each step can get [11,12],

$$d_{1,i (i=h)} = \sqrt{(d_0)^2 + 4d_D\{h_i - (0,43r_p - 0,43r_d)\}} \quad (14)$$

And,

$$d_{int,i (i=h)} = \sqrt{(d_0)^2 + (d_D + 2r_d)^2 - (d_{1,i})^2} \quad (15)$$

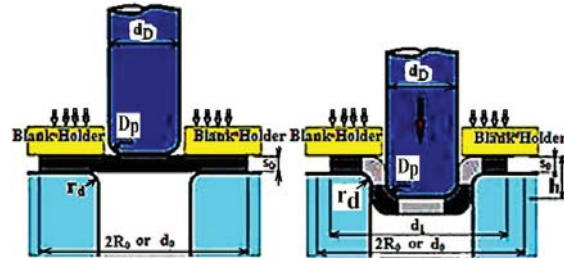


Fig. 2. Changing of the dimensions, over punch stroke in cup deep drawing processes

Criteria of cracking was approached by a maximum stress of material, as an equation of the first approach:

$$\sigma_{1crack,i} \geq UTS \cdot c \quad (16)$$

Where $\sigma_{crack,i}$ is the limiting stress failure (cracking), UTS is the ultimate tensile strength of material, and c is the constant multiplier, whose value depends on the behavior of materials. Value $c \approx 1.0 - 1.55$

If the failure of products based on the maximum stress (cracking), was suggested by Siebel and Beisswanger [12] and hence, stress cracking (maximum) to every punch stroke can follow equation (second approach):

$$\sigma_{2crack,i} = \frac{1,1 \sigma_{fm,i,max}}{\eta_{def}} \{ \ln(LDR) - 0,25 \} \quad (17)$$

Where $\sigma_{fm,i,max}$ is the maximum stress forming, namely the cracking criteria equal to $\sigma_{crack,i}$, LDR is the limiting draw ratio, for the steel material $\approx 1.8 - 2$, η_{def} is the efficiency of material deformation $\approx 0,7$, and $\sigma_{fm,i,Max}$ is the mean flow stress = $(1/2) (\sigma_{fmpoint 1-2,i} + UTS)$.

The cracking criteria were used to estimate the maximum varying blank holder force without cracking. By combining the equation 10 to equation 16 and 17, then the maximum radial stress (the cracking stress) becomes,

$$\sigma_{crack,i} \geq e^{\mu\pi} \left\{ \left\{ \sqrt{\frac{2(R_n+1)}{1+2R_n}} (\sigma_{fmp1-2,i}) \left(\ln \frac{d_{1,i}}{d_m} \right) \right\} + \left\{ \frac{2\mu F_{bh,i}}{\pi d_{1,i} s_0} \right\} + \left(\sigma_{fmpoint 2-3,i} \frac{s_0}{2r_d} \right) \right\} \quad (18)$$

Finally, the maximum VBHF equation is obtained

$$F_{bh,i,max} \leq \left\{ \frac{(\sigma_{crack,i})}{e^{\mu\pi}} - \frac{(\sigma_{fmp2-3,i} \frac{s_0}{2r_d})}{e^{\mu\pi}} - \left\{ \sqrt{\frac{2(R_n+1)}{1+2R_n}} (\sigma_{fmp1-2,i}) \left(\ln \frac{d_{1,i}}{d_m} \right) \right\} \right\} \times \left\{ \frac{\pi d_{1,i} s_0}{2\mu} \right\} \quad (19)$$

$$F_{bh,i \max} = f(K, n, UTS, \bar{R}, s_0, d_0, d_D, r_p, d_{1,i}, h, d_m, \mu) \quad (20)$$

Equation 19 is useful for predicting a maximum of VBHF, which can be applied to produce a product without cracking and can be used for preventing wrinkles. Equation (19) and equation (20) give relationship among and material properties, geometric punch-die, material deformation, flow stress, coefficient of friction and cracking criterion.

1.2. FEM modeling

In this study, FEM provided the essential data, that will be compared to analytical solution. Element formation is carried out using FE of elastic-plastic deformation and ignore the effects of spring back. The curve of flow stress is following the Swift formulation by considering the yield stress and plastic flow stress. Simulation of wrinkling, and tearing (cracking) was done using the implicit AUTOFORM ver3.1 FE solver that is commonly used for FEM solver. FE simulations had been done for cylindrical cups deep drawing with dimensions of product, tools and by using mechanical properties, as shown in the following Figure 3, Table 1 and table 2 below. And then, the analytical result of the maximum VBHF is incorporated into the process generator functions of FEM software for generating an animation and describing the quality of a cylindrical cup drawing over the forming process.

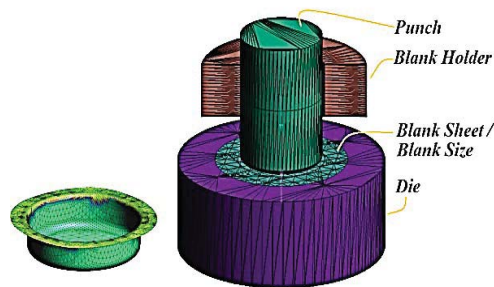


Fig. 3. Finite element model of cylindrical cup, by using AUTOFORM

Table 1. Dimension of tools

Dimension of tools	remarks
d_0 (Blank sheets diameter)	64 mm – 84 mm
d_D (Die diameter)	40 mm
d_p (Punch diameter)	39.58 mm
2 x Clearance	0.43 mm
s_0 (Initial thickness of sheet material)	0.2 mm
r_d (Die edge radius)	1 mm
r_p (Edge punch radius)	2 mm
h (height of cylindrical cup)	15-34 mm

Table 2. Mechanical properties and processes variable

JIS G 3141 grade SPCD equivalent to DIN standard D03		Processes Variable	
K	559 N/mm ²	Coefficient of friction	0.4-0.45 (dry) 0.18-0.2 (Palm oil)
n	0.176	Punch velocity	1 mm/Sec.
\bar{R}_n	2		
UTS	355 N/mm ²		
Yield Stress	232 N/mm ²	BHF	Constant and Varying

2. Result and discussion

Analytic calculation to obtain the material deformation and the mean flow stress over the punch-stroke under the condition of constant volume, can be shown as table 3 below.

Table 3. Analytic calculation of strain and mean flow stress in flange every punch stroke under conditions of constant volume and base on slab method

i = h (mm)	$d_{1,i}$ (mm)	$d_{int,i}$ (mm)	$\epsilon_{1,i}$	$\epsilon_{2,i}$	$\epsilon_{3,i}$	σ_{imp1-2} (N/mm ²)	σ_{imp2-3} (N/mm ²)
0	64.0	42.0	0.000	0.000	0.096	0.0	0.0
2	61.5	45.6	0.045	0.091	0.196	345.3	393.5
4	60.5	46.9	0.061	0.120	0.228	363.8	408.3
6	57.9	50.1	0.111	0.195	0.310	399.8	437.3
8	55.0	53.2	0.166	0.260	0.382	424.7	456.9
10	52.1	56.1	0.227	0.319	0.447	444.3	471.5
12	48.9	58.9	0.296	0.372	0.505	460.8	483.0
14	45.5	61.5	0.375	0.420	0.558	475.4	492.5
15	43.7	62.8	0.419	0.443	0.583	482.3	496.7
16	41.9	64.1	0.466	0.465	0.607	488.9	500.6
Etc							

Remarks: i=h is the punch stroke

And also, analytic calculation have been obtained the maximum of VBHF distribution, based on both of criteria cracking approach, by using equation 16 and 17, respectively. The magnitude of the maximum of VBHF base on equation 18 and 19, gives the effect of radial stress and drawing force, can be displayed as Table 4.

Table 4. Analytic calculation of the maximum VBHF, radial stress and maximum drawing force – no cracking; $F_{crackh,i} = 10196.2$ N, $\sigma_{crackh,i} = 451.4$ N/m², $\mu = 0.45$, $d_0 = 64$ mm

Punch Stroke (mm)	Analytic calculation with first cracking criterion (Eq. 16)			Analytic calculation with second cracking criterion (Eq. 17)		
	$F_{bh,i}$ Max (N)	$\sigma_{r,i}$ Max. (N/mm ²)	$F_{d,i}$ Max (N)	$F_{bh,i}$ Max. (N)	$\sigma_{r,i}$ Max. (N/mm ²)	$F_{d,i}$ (N)
0	0.0	0.0	0.0	0.0	0.0	0.0
2	3954.4	401.2	9665.5	1359.3	308.2	7003.2
4	1467.4	401.2	9665.5	1363.1	388.1	8819.3
6	1480.7	401.2	9665.5	1702.6	402.2	9138.3
8	1874.7	401.2	9665.5	2291.7	411.6	9353.0
10	2479.9	401.2	9665.5	3019.9	418.7	9513.5
12	3224.7	401.2	9665.5	3840.2	424.3	9640.6
14	4069.1	401.2	9665.5	4725.1	428.9	9745.1
15	4519.6	401.2	9665.5	5184.8	430.9	9791.0
16	4984.4	401.2	9665.5	5652.4	432.8	9833.5
Etc.						

With the application of the maximum VBHF can maintain the radial stress and drawing force magnitude below a critical value. The maximum VBHF magnitude in early of the punch stroke (the stroke punch of 0- 2 mm) allowed quite large (around 1300N-3900N). Then VBHF should be decreased up to 1359N-1467N at punch stroke position of 4 mm. Furthermore, from punch stroke position of 4 mm until the

end of the punch stroke, gradually allowed raised with a gradient by around 0.28. The maximum VBHF having a pattern of the distribution as shown in the table 4, is expected to anticipate concerning the transformation dynamics of the tangential and radial stress that appears over punch stroke on a flange.

According to the results of the analytic calculation and simulation of FEM, the maximum VBHF profile could be described by Figure 4. The VBHF profile can be used as reference to estimate a safe zone without cracking, which it recommended slightly below of the maximum VBHF line.

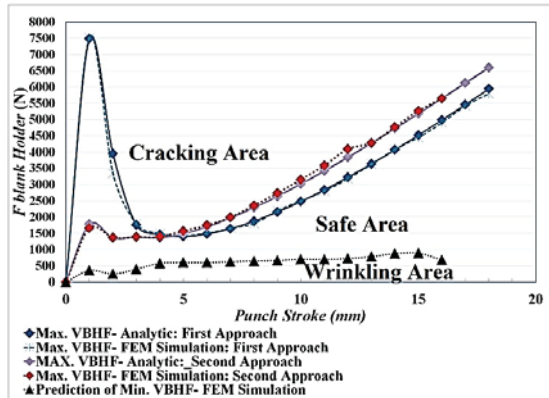


Fig. 4. The maximum and minimum VBHF to avoid cracking and wrinkling, by using the slab method (analytic calculation) and FEM; $d_0=64$ mm; $\mu=0.45$

Drawing force over the punch stroke related to the application of maximum VBHF could be maintained in a safe area without cracking, as shown in Figure 5.

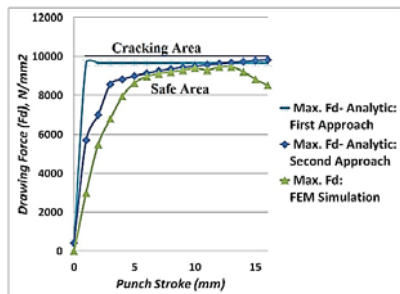


Fig. 5. Drawing Force with the application of the maximum VBHF to avoid cracking.

The maximum VBHF without lubrication on blank-sheet with initial diameter between 64 mm up to 76 mm, can be applied effectively to produce a cup-product without cracking (as shown in Figure 6). And for forming of blank size greater than 76 mm, the Application of VBHF is necessary to use lubrication to further optimize the process of deep drawing. As verification, the analytical calculation is incorporated into the process generator functions for running the FEM simulation. The results with both methods had given an information that the maximum VBHF provide a fairly good result and not much different result, in order to avoid cracking, as shown in Figure 6 and 7.

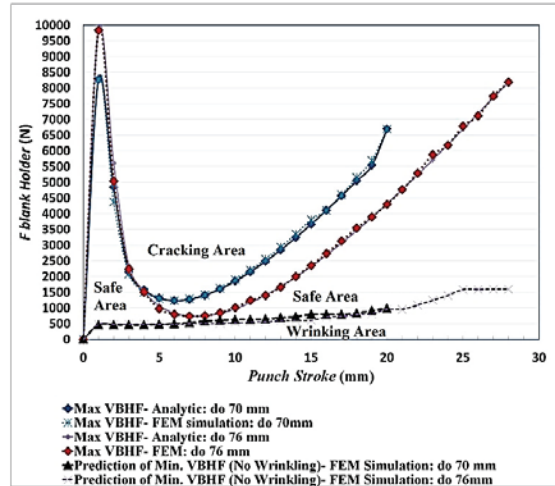


Fig. 6. The maximum VBHF to avoid cracking, by using the slab method (analytic calculation) and FEM Sim.; $d_0=70$ mm and $d_0=76$ mm; $\mu=0.45$

A Figure 7 shown, the applications of maximum VBHF by using $\mu=0.2$ can still optimally form the blank sheet up to a diameter of 82 mm. In practically, The Maximum VBHF profile could give a guidance to determine the process parameter in safe zone without cracking and wrinkling. In this set up condition of VBHF can maintain stress forming and eliminate not only cracking, but also wrinkles phenomenon on flange in early and end of the punch stroke. The application of maximum VBHF is quite effective to prevent cracking over the punch (punch stroke). However, it is still to be tested further by experimentation. Compared to the researches related [6,7], there are small different regard to a recommendation of the VBHF magnitude in early of the punch stroke. The FEM simulation by using the results of analytical approach proving, that the maximum VBHF gives a good effect for preventing an excessive tangential stress in early of the punch stroke. So this application is more effective to eliminate wrinkles in early of the punch stroke.

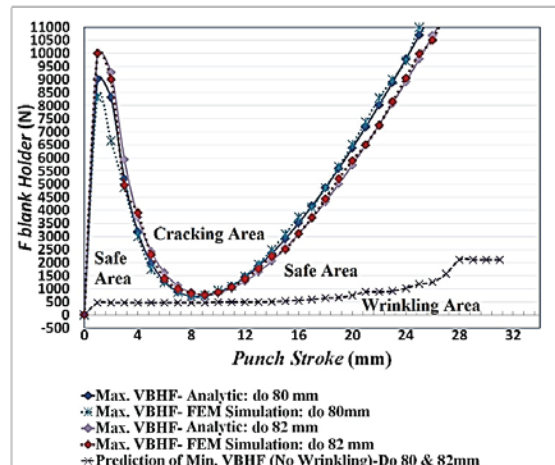


Fig. 7. The maximum VBHF to avoid cracking, by using the slab method (analytic calculation) and FEM Sim., $d_0=80$ mm and $d_0=82$ mm $\mu=0.2$

The application of maximum VBHF without the lubrication of mineral oil ($\mu= 0.4 - 0.45$) could increase the formability up to 5.7% and could increase the cup depth up to 7%. The cup is formed up to 28 mm depth by using an initial blank sheet (do) 76 mm. Meanwhile, the application of maximum VBHF with the lubrication of palm oil ($\mu= 0.18 - 0.2$) could increase the formability up to 8 % and could increase the cup depth the cup depth up to 17 %. The cup is formed up to 33 mm depth with an initial blank sheet (do) 82 mm by the application of the maximum VBHF. Compared to the application of constant BHF, the cup could be drawn up to 28 mm by using initial blank sheet (do) 76 mm, as shown in Figure 8.

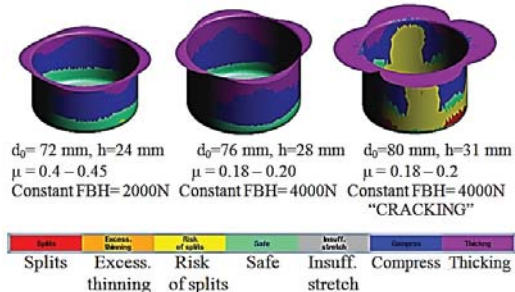


Fig. 8. FEM simulation on the variation of an initial blank sheet and result of cup height by using the constant force of blank holder from analytically

The analytical approach results of the maximum VBHF have been running well in the software of FEM simulations, as shown in figure 9.

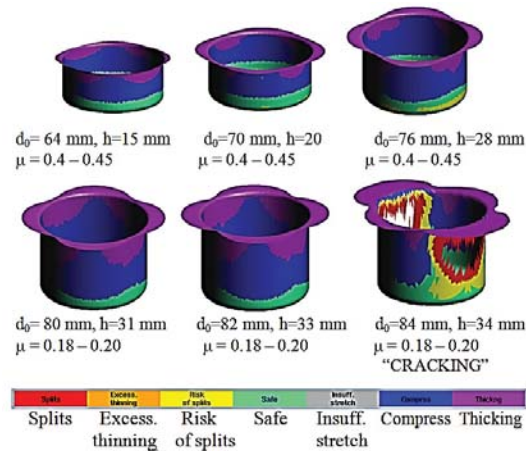


Fig. 9. FEM simulation on the variation of an initial blank sheet and result of cup height by using the maximum VBHF from analytically approach

3. Conclusion

Results of the calculation of VBHF maximum, not much different with FEM simulation. Compared to the application of the constant blank holder force, VBHF can be quite effective in preventing the occurrence of cracking and improve the formability. Mathematical modeling of VBHF can be used as a simple approach for estimating the

magnitude of blank holder force in every punch stroke. From VBHF modeling indicated a tendency and its similar trend compared to FEM simulation results. Compared constant BHF, the application of maximum VBHF with the lubrication of palm oil ($\mu= 0.18 - 0.2$) would increase the formability up to 8 % and increase the cup depth the cup depth up to 17 %.

The results of this study are indeed a simple approach of a mathematical modeling and have been verified by FEM simulation, but it has provided evidence of a BHF improvement in deep drawing processes. The VBHF profile have not much different, if compared with previous related research [6,7], especially in the middle and the end of the punch stroke. The results of this study will be explored through further experiments.

Acknowledgements

The authors would like to acknowledge to department of mechanical engineering, University of Indonesia, for allowing to use AUTOFORM V3.1. Also, we gratefully acknowledge helpful discussion and consultation with Prof. Dr. Dedi Priadi.

References

- [1] Daw-Kwei Leu. Prediction of the maximum drawing load in the cup-drawing process of sheet metals. Journal of Materials Processing Technology, ElsevierScience S.A. 1997; 72: 256-261.
- [2] T. Cwiekala, A. Brosius, A.E. Tekkaya. Accurate deep drawing simulation by combining analytical approaches. International Journal of Mechanical Sciences, Elsevier Ltd. 2011; 53: 374-386.
- [3] P.V.R. Ravindra Reddy, B.V. Rao, G. Chandra Mohan Reddy, P. Radhakrishna Prasad, G. Krishna Mohan Rao. Parametric studies on wrinkling and failure limits in deep drawing of cylindrical cup. International Journal of Emerging Technology and Advanced Engineering, IJETAE Exploring Research and Innovation. 2012; 2 No. 6: 218-222.
- [4] B.V.S. Rao, P.V.R. Ravindra Reddy, G. Chandra Mohan Reddy, G. Krishna Mohan Rao. Optimization of blank holder force in deep drawing of the cylindrical using Taguchi approach. International Journal of Engineering and Innovation Technology. 2012; 2 No. 3: 144-149.
- [5] Y. Marumo, H. Saiki, L. Ruan. Effect of sheet thickness on deep drawing of metal foils. Journal of Achievements in Materials and Manufacturing Engineering. International OCSCO World Press. 2007; 20: 473-482.
- [6] Z.Q.Sheng, S.Jirathearanat, T. Altan, Adaptive FEM simulation for prediction of variable blank holder force in conical cup drawing, International Journal of Machine Tools and Manufacturing, Elsevier Ltd. 2004; 44: 487-494.
- [7] S. Yoshihara, Ken-ichi Manabe, Hisashi Nishimura, Effect of blank holder force control of magnesium alloy sheet, Journal of Materials Technology, Elsevier Ltd. 2005; 170: 579-585.
- [8] S. Candra, I.M.L. Batan, Experimental study and analysis of the influence of draw-bead against restriction and deep drawing force of rectangular cup-cans with the tin plate material. Applied Mechanic and Material (AMM), Trans Tech Publications, Switzerland. 2012; 315: 246-251.
- [9] S. Candra, I.M.L. Batan, A.S. Pramono, B. Pramujati. Simulation of metal flow to investigate the application of the antilock brake mechanic system in deep drawing process of cup. Advanced Materials Research (AMR) Trans Tech Publications, Switzerland. 2013; 789: 367-372.
- [10] S. Candra, I.M. Londen Batan, W. Barata, A.S Pramono, Simulation of semi-active the blank holder force control to prevent wrinkling and cracking in deep drawing process. Applied Mechanics and Materials (AMM) Trans Tech Publications, Switzerland. 2014; 493: 473-479.
- [11] Schey, J.A. Introduction to manufacturing processes. Third Ed. Singapore: Mc-Graw Hill; 2000. p. 408-419.
- [12] Lange, K. Handbook of Metal Forming. USA: Mc-Graw Hill, USA; 1985. p. 20.1-20.66.

Author details

About Scopus Author Identifier

The Scopus Author Identifier assigns a unique number to groups of documents written by the same author via an algorithm that matches authorship based on a certain criteria. If a document cannot be confidently matched with an author identifier, it is grouped separately. In this case, you may see more than one entry for the same author.

Print Email

Candra, Susila

Follow this Author

h-index: 2

View h-graph


University of Surabaya, Department of Manufacturing Engineering, Surabaya, Indonesia
 Author ID: 55655694300

View potential author matches

Other name formats: Candra, S.

Subject area: Engineering Materials Science

Document and citation trends:

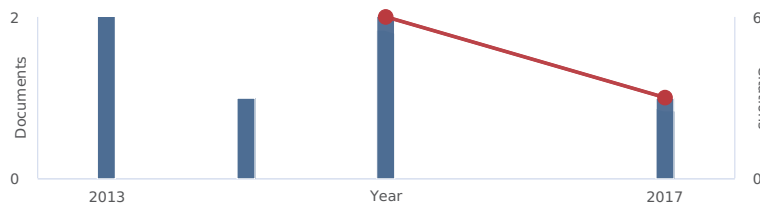

Documents by author

6

Analyze author output

Total citations

9 by 5 documents

Get citation alerts Add to ORCID Request author detail corrections

6 Documents Cited by 5 documents 4 co-authors Author history

View in search results format

Sort on: Date (newest)

Export all Add all to list Set document alert Set document feed

Document title	Authors	Year	Source	Cited by
Modeling of the minimum variable blank holder force based on forming limit diagram (FLD) in deep drawing process Open Access	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2017	IOP Conference Series: Materials Science and Engineering	0
View abstract Related documents				
Modeling of critical blank holder force based on a gap limit and unbending strain energy in deep drawing process	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2015	International Journal of Engineering and Technology	0
View abstract Related documents				
Analytical study and FEM simulation of the maximum varying blank holder force to prevent cracking on cylindrical cup deep drawing Open Access	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2015	Procedia CIRP	3
View abstract Related documents				
Simulation of semi-active the blank holder force control to prevent wrinkling and cracking in deep drawing process	Candra, S., Batan, I.M.L., Berata, W., Pramono, A.S.	2014	Applied Mechanics and Materials	2
View abstract Related documents				
Simulation of metal flow to investigate the application of antilock brake mechanic system in deep drawing process of cup	Candra, S., Batan, I.M.L., Pramono, A.S., Pramujati, B.	2013	Advanced Materials Research	2
View abstract Related documents				
Experimental study and analysis of the influence of drawbead against restriction and deep drawing force of rectangular cup-cans with tin plate material	Candra, S., Batan, I.M.L.	2013	Applied Mechanics and Materials	2
View abstract Related documents				

The data displayed above is compiled exclusively from documents indexed in the Scopus database. To request corrections to any inaccuracies or provide any further feedback, please use the [Author Feedback Wizard](#).

About Scopus

- [What is Scopus](#)
- [Content coverage](#)
- [Scopus blog](#)
- [Scopus API](#)
- [Privacy matters](#)

Language

- [English](#)
- [Spanish](#)
- [Portuguese](#)
- [Russian](#)

Customer Service

- [Help](#)
- [Contact us](#)



[Terms and conditions](#) [Privacy policy](#)

Copyright © 2018 Elsevier B.V. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

Cookies are set by this site. To decline them or learn more, visit our [Cookies page](#).

