

International Journal on Advanced Science Engineering Information Technology

HOME ARCHIVES

International Journal on Advanced Science, Engineering and Information Technology



International Journal on Advanced Science, Engineering and Information Technology (IJASEIT) is an international peer-reviewed journal dedicated to interchange for the results of high quality research in all aspect of science, engineering and information technology. The journal publishes state-of-art papers in fundamental theory, experiments and simulation, as well as applications, with a systematic proposed method, sufficient review on previous works, expanded discussion and concise conclusion. As our commitment to the advancement of science and technology, the IJASEIT follows the open access policy that allows the published articles freely available online without any subscription.

Frequency: 6 issues per year

DOI : 10.18517

ISSN : 2088-5334

e-ISSN : 2460-6952

Important Dates :

Paper Submission Date: Any time

Online Publication Date: Last date of February, April, June, August, October, December

NEW 2020 Acceptance Rate: 14.32 % | 2019 Acceptance Rate: 17.85 % | 2018 Acceptance Rate: 18.20 %

NEW IJASEIT has launched a new template since Vol. 11 (2021) No.1 : **Template IJASEIT 2021**

NEW SCImago 2020 -> 0.22 | Q3 and Scopus CiteScore 2020 -> 1.9 | 65th percentile / 2nd quartile Scopus.

International Journal on Advanced Science, Engineering and Information Technology is indexed in Elsevier Scopus database

Current Issue

Vol. 11 (2021) No. 3

Articles

Acetylcholinesterase Immobilized on Glass Rod for Organophosphorus Pesticides Detection: Application on Milk Analysis

Asiya Utegenova, Zhainagul Kakimova, Alexey Klivenko, Zarina Kapshakbayeva, Galiya Imankulova, Gulmira Naurzbaeva, Gulnara Tulkebayeva, Gulmira Mirasheva
pages: 843-848 [Full text](#) DOI:10.18517/ijaseit.11.3.12910

Immunomodulatory Potentials of Winged Bean (*Psophocarpus tetragonolobus*) Bioactive Compounds on Human Lymphocyte Proliferation

Arindra Nirbaya, Fransiska Rungkat Zakaria, Hendra Wijaya, - Erniati
pages: 849-855 [Full text](#) DOI:10.18517/ijaseit.11.3.11527

Spatial Delineation of Rice Yield and Production by the Combination of Rice Crop Modelling and Remote Sensing: A Case Study in Soc Trang Province, Vietnam

Vo Quang Minh, Truong Chi Quang, Thai Thanh Du, Tran Thi Hien
pages: 856-863 [Full text](#) DOI:10.18517/ijaseit.11.3.11449

IJASEIT

About

Editorial Board

Guide for Authors

Journal Contact

Online Submission

Peer Review Policy

Publication Ethics

Browse Authors

NEW Update : IJASEIT in Scopus

NEW Update : IJASEIT in Scimago JR

Scopus CiteScore

1.9 CiteScore²⁰²⁰
65th percentile
Powered by Scopus

Scimago Journal Rank



Potential Availability of Indigenous Resources to Reduce Agriculture Environmental Problems in Klaten, Indonesia

Sigit Soebandiono, Anton Muhibuddin, Edi Purwanto, Djoko Purnomo
pages: 864-873 [Full text](#) DOI:10.18517/ijaseit.11.3.11585

Vertical Market Integration for Beef Prices Using Vector Error Correction Model (VECM) In Indonesia

Rudi Wibowo, Ahmad Zainuddin, Rena Yunita Rahman, Intan Kartika Setyawati, Illia Seldon Magfiroh, Indah Ibanah
pages: 874-879 [Full text](#) DOI:10.18517/ijaseit.11.3.9667

A Conceptual Framework for Flood Impact Mitigation Through Transboundary River Management

Georgina Clegg, Richard Haigh, Dilanthi Amaratunga, Harkunti Rahayu, Harshinie Karunaratna, Deni Septiadi
pages: 880-888 [Full text](#) [DOI:10.18517/ijaseit.11.3.14329](#)

Morphometric Characteristics of Cipeles Watershed to Identify Flood Prone Area

Pradnya Paramarta Raditya Rendra, Emi Sukiyah
pages: 889-897 [Full text](#) [DOI:10.18517/ijjaseit.11.3.12937](#)

Simulation of Oil Spill Pollution due to Tsunami in Cilacap, Central Java, Indonesia

Rizky Hidayat, Mardi Wibowo, Aida Sartimbul
pages: 898-906 [Full text](#) [DOI:10.18517/ijaseit.11.3.14264](#)

Performance of Water Wheel Knock Down System (W2KDS) for Rice Milling Drive

Asep Neris Bachtiar, Ahmad Fauzi Pohan, Riko Ervil, Irwan Yusti, - Santosa, Isril Berd, Uyung Gatot S Dinata
pages: 907-916 [Full text](#) DOI:10.18517/ijaseit.11.3.10468

Water Quality Analysis in Mantaro River, Peru, Before and After the Tailing's Accident Using the Grey Clustering Method

Alexi Delgado, Francisco Gil, Juan Chullunquía, Tom Valdivia, Chiara Carbajal
pages: 917-922 [Full text](#) [DOI:10.18517/ijaseit.11.3.11928](#)

The Verification Significant Wave Height Technique in Indonesian Waters and Analysis of Low Air Pressure

Eko Supriyadi, Sri Puji Rahayu
pages: 923-929 [Full text](#) DOI:10.18517/ijaseit.11.3.12342

Loads of Pollution to Lake Toba and Their Impacts

- Lukman, H. Hidayat, Luki Subehi, Rahmi Dina, Novi Mayasari, Irma Melati, Yuli Sudriani
pages: 930-936 | Full text | DOI:10.18517/ijaseit.11.3.12733

Multi-Hazard Early Warning System (MHEWS) Assessment Methodology for Schools

Samantha Louise N. Jarde, Raniel Cris L. Macabare, Salvador G. Oleivar, Abraham Matthew S. Carandang, Patrick Shaun N. Ngo, Richard M. de Jesus, Lessandro Estelito O. Garciano, Andres Winston C. Oreta
pages: 937-946 [Full text](#) [DOI:10.18517/ijaseit.11.3.14535](#)

Seismic Hazard Zonation in Gedebage Future Development in Bandung City Using HVSr Inversion

Nendi Rohaendi, Rahayu Robiana, Emi Sukiyah, Dicky Muslim, Athanasius Cipta
pages: 947-954 [Full text](#) [DOI:10.18517/ijaseit.11.3.14996](#)

Geochemical of Karst Water in the Western part of Gunungkidul District Area

T. Listyani R.A., Dianto Isnawan
pages: 955-961 [Full text](#) DOI:10.18517/ijaseit.11.3.14421

Preliminary Study of Ozonated Water to Preserve the Quality of Tofu: The Effect of Exposure Time and Replacement of Ozonated Water

Eva Fathul Karamah, Muhammad Zaki Zahirsyah, Rana Rezeki Najeges
pages: 962-967 [Full text](#) [DOI:10.18517/ijaseit.11.3.13130](#)

UV-Vis Absorbance and Fluorescence Characterization of Pasig River Surface Water Samples Towards the Development of an LED Fluorescence Lidar System

Jumar G. Cadondon, Edgar A. Vallar, Lawrence P. Belo, Aileen H. Orbecido, Maria Cecilia D. Galvez
pages: 968-980 [Full text](#) [DOI:10.18517/ijaseit.11.3.12898](#)

Remote Pressure Water Valve Control System Based on PLC



Template of Journal IJASEIT

Support Contact


WAG :+62-82171-822448

E-mail : ijaseit@insightsociety.org

The Map Authors



Keywords Cloud

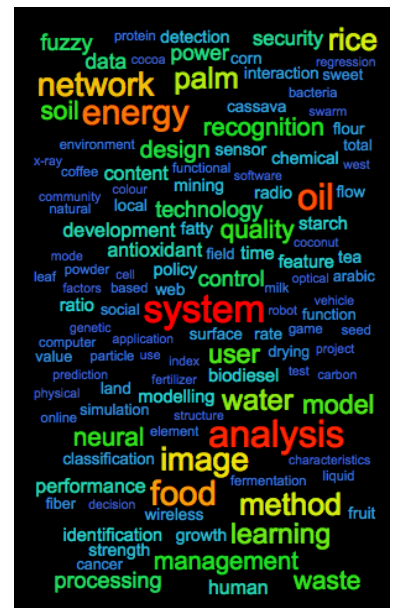

Published by



W. Widhiada, I. M. Widiyarta, I.N.G. Antara, I.N. Budiarsa, I.M.G. Karohika
pages: 981-986 [Full text](#) DOI:10.18517/ijaseit.11.3.14486

Member of

The Latowu Ultramafic Rock-Hosted Iron Mineralization in the Southeastern Arm Sulawesi, Indonesia: Characteristics, Origin, and Implication for Beneficiation

- Sufriadin, Sri Widodo, Meinarni Thamrin, Akane Ito, Tsubasa Otake
pages: 987-993 [Full text](#) DOI:10.18517/ijaseit.11.3.10273

The Effect of Heavy Metal Lead (Pb) on the Growth of Ammonia-Degrading Bacteria and Physical Changes of Eichhornia crassipes in Groundwater Phytoremediation

Fahrudin Fahrudin, Muhammad Farid Samawi, Mustika Tuwo, Ramlan Efendi Tanjung
pages: 994-1000 [Full text](#) DOI:10.18517/ijaseit.11.3.12588

Effect of Blanching and Drying Process on Physicochemical and Microbiological Characteristics of Dried Chili

Tri Marwati, Yeyen Prestyaning Wanita, Titiek F. Djaafar, Retno Utami Hatmi, Erni Apriyati, Siti Dewi Indrasari
pages: 1001-1006 [Full text](#) DOI:10.18517/ijaseit.11.3.12132

Anaerobic Digestion of Industrial Tempeh Wastewater with Sludge from Cow Manure Biogas Digester as Inoculum: Effect of F/M Ratio on the Methane Production

Yunus Fransiscus, Tuani L. Simangunsong
pages: 1007-1013 [Full text](#) DOI:10.18517/ijaseit.11.3.11846

Initial Stage in Designing Household Constructed Wetlands: Selection of a Suitable Aquatic Plant

Siti Qomariyah, Ari Handono Ramelan, Prabang Setyono, - Sobriyah
pages: 1014-1021 [Full text](#) DOI:10.18517/ijaseit.11.3.12343

Synthesis and Characterization of Nanoemulsion Andaliman Aroma Compound

- Rienoviar, Dwi Setyangingsih, - Sudirman, Fitriani Kasim
pages: 1022-1028 [Full text](#) DOI:10.18517/ijaseit.11.3.10569

Effect of Small-Scale Box-Fermentation on Catechin and Epicatechin Content of Lampung Cocoa Beans Varieties

- Fahrurrozi, Ario Betha Juanssilfero, Uri Perwitasari, - Stephanie, Aryo Putra Purwanto, Imam Bagus Nugroho, Shanti Ratnakomala, Rizna Triana Dewi, Nur Ajjah, Puspita Lisdiyanti
pages: 1029-1034 [Full text](#) DOI:10.18517/ijaseit.11.3.14846

Preparation and Characterization of Nanocrystalline Cellulose from Cladophora sp. Algae

S. Steven, Y. Mardiyati, Silvia Mar'atus Shoimah, Raden Reza Rizkiansyah, Sigit Puji Santosa, Rochim Suratman
pages: 1035-1041 [Full text](#) DOI:10.18517/ijaseit.11.3.10278

Effect of Annealing at High Temperatures on Microstructural Formation of 15Cr-25Ni Austenitic Stainless Steel Cast

- Syahbuddin, - Parikin, Mohammad Dani, Salim Mustofa, Andon Insani, Eddy Agus Basuki, Ching An Huang
pages: 1042-1048 [Full text](#) DOI:10.18517/ijaseit.11.3.10456

A Comparative Survey of Coding, Multiplexing, and Equalization Techniques Used in Coherent Optical Fiber Communications

John Martin Ladrado, Emmanuel Trinidad, James Agustin Molina, Lawrence Materum
pages: 1049-1066 [Full text](#) DOI:10.18517/ijaseit.11.3.14093

A Comprehensive Review on Big Data-Based Potential Applications in Marine Shipping Management

Viet Duc Bui, Hoang Phuong Nguyen
pages: 1067-1077 [Full text](#) DOI:10.18517/ijaseit.11.3.15350

Local Freshwater Fish Recognition Using Different CNN Architectures with Transfer Learning

Anup Majumder, Aditya Rajbongshi, Md. Mahbubur Rahman, Al Amin Biswas
pages: 1078-1083 [Full text](#) DOI:10.18517/ijaseit.11.3.14134

Tech Tools for Anticipating Human Trafficking in Archipelago State

Soni Akhmad Nulhaqim, Nandang Alamsyah Deliarnoor, - Suryaningsih
pages: 1084-1091 [Full text](#) DOI:10.18517/ijaseit.11.3.11265

Improved Self-Adaptive ACS Algorithm to Determine the Optimal Number of Clusters

Ayad Mohammed Jabbar, Ku Ruhana Ku-Mahamud, Rafid Sagban
pages: 1092-1099 [Full text](#) DOI:10.18517/ijaseit.11.3.11723



Analysis of Waiting Time Using Three Mixtures Exponential Distribution*Wafaa Sayyid Hasanain, Waleed Mohammed Elaibi*pages: 1100-1104 [Full text](#) DOI:10.18517/ijaseit.11.3.14091**Fuzzy-Based Application Model and Profile Matching for Recommendation Suitability of Type 2 Diabetic***Agus Wantoro, Admi Syarif, Kurnia Muludi, Khairun Nisa Berawi*pages: 1105-1116 [Full text](#) DOI:10.18517/ijaseit.11.3.12277**The ICT Usage in Delivering Integrated Social Welfare Services***Denti Kardeti, Budhi Gunawan, Binahayati Rusyidi, Netty Prasetyani*pages: 1117-1124 [Full text](#) DOI:10.18517/ijaseit.11.3.11313**An Approach to Optimize the Design of Ultrasonic Transducer for Food Dehydration***Hay Nguyen, Ngoc-Phuong Nguyen, Xuan-Quang Nguyen, Anh-Duc Le*pages: 1125-1131 [Full text](#) DOI:10.18517/ijaseit.11.3.7668**Measuring Dynamic Capabilities of IT Resources***Asih Nur Fadhillah, Apol Priyadi Subriadi*pages: 1132-1142 [Full text](#) DOI:10.18517/ijaseit.11.3.10929**Ukrainian MOOC: Quantitative and Thematic Analysis of Online Courses***Sergii Sharov, Anatolii Zemlianskyi, Tetiana Sharova, Hapoti Viktor*pages: 1143-1149 [Full text](#) DOI:10.18517/ijaseit.11.3.13705**Comparison of JSON and XML Data Formats in Document Stored NoSql Database Replication Processes***- Rianto, Muhamad Arsyad Rifansyah, Rohmat Gunawan, Irfan Darmawan, Alam Rahmatulloh*pages: 1150-1156 [Full text](#) DOI:10.18517/ijaseit.11.3.11570**Mass Evacuation Transportation Model Using Hybrid Genetic Algorithm***Dahlan Abdullah, Herman Fithra*pages: 1157-1161 [Full text](#) DOI:10.18517/ijaseit.11.3.11687**Evaluations of Software Developed as Research Tools to Analyze Trends of Educational Videogames Characters***Nayeth I. Solorzano Alcivar, Lissenia I. Somoza Quijje, Diego A. Carrera Gallego*pages: 1162-1171 [Full text](#) DOI:10.18517/ijaseit.11.3.12431**Development of Chemiluminescence Resonance Test System Using SiPM Front-end ASIC to Detect Na and K Ions in Urine***Hojong Chang, KyungDon Choi, Byunghun Han, Hyunduk Kim, Jaeho Ko, Gyuseong Cho*pages: 1172-1177 [Full text](#) DOI:10.18517/ijaseit.11.3.12996**Government Reorganization in the ICT Sector: Analysis of Multi-Level Factors from the Case of South Korea***Jisung Yoo, Koomin Kim, Jun Houn Kim*pages: 1178-1185 [Full text](#) DOI:10.18517/ijaseit.11.3.13001**A Web-based DSS: Information System for Sustainable Fisheries Supply Chain in Coastal Communities of Small Islands Indonesia***Wellem Anselmus Teniwut, Cawalinya Livsanthi Hasyim, Dawamul Arifin*pages: 1186-1192 [Full text](#) DOI:10.18517/ijaseit.11.3.12462**Measurement Model on Community Farmer for Agriculture Cluster Development***- Silfia, - Helmi, Melinda Noer, - Henmaidi*pages: 1193-1202 [Full text](#) DOI:10.18517/ijaseit.11.3.12496**Carrier RNA (cRNA) Enhances dsDNA Recovery Extracted from Small Volume Spent Embryo Culture Medium***Ayu Mulia Sundari, Pritta Ameilia Iffanolida, Kresna Mutia, Naylah Muna, Eliza Mansyur, Andon Hestiantoro, Budi Wiweko, Muhammad Fauzi, Anom Bowolaksono*pages: 1203-1208 [Full text](#) DOI:10.18517/ijaseit.11.3.13591**Screening of Potential Tannase-producing Fungi from Local Agri-industrial By-products using a Plate Assay and Submerged Fermentation***Mohammad Syaril Ramli, Raseetha Siva, Nur Yuhasliza Abd Rashid, Shaiful Adzni Sharifudin, Noraini Samat, Sawarni Hasibuan, Mohd Nizam Lani, Azlina Mansor*

pages: 1209-1213 [Full text](#) DOI:10.18517/ijaseit.11.3.13045

Acceptance Ratio Analysis: An Early Fault Indicator for Grid-Connected Photovoltaic System

Fatin Azirah Mohd. Shukor, Hedzlin Zainuddin, Nurmalessa Muhammad, Farah Liyana Muhammad Khir
pages: 1214-1223 [Full text](#) DOI:10.18517/ijaseit.11.3.12614

Carbon Storage on Different Species of Seagrass on Tourist Destination Areas: A Measure of Disturbed and Undisturbed Environments

Ni Luh Watiniasih, I Wayan Nuarsa, I Made Merdana, Agus Dharma, I Nyoman Gde Antara, I Nyoman Budiarsa
pages: 1224-1231 [Full text](#) DOI:10.18517/ijaseit.11.3.14785

Different Drying Duration of Corncobs Powders and Its Effects on Physical, Nutritional and Phytochemical

- Haslina, Novizar Nazir, Adi Sampurno
pages: 1232-1238 [Full text](#) DOI:10.18517/ijaseit.11.3.15321

Biodiesel Synthesis through the Non-Alcohol Route using the Immobilized Lipase Enzyme from *Bacillus subtilis* as Biocatalyst

Afra Alatas, Dwini Normayulisa Putri, Meka Saima Perdani, Tania Surya Utami, Heri Hermansyah
pages: 1239-1245 [Full text](#) DOI:10.18517/ijaseit.11.3.14784

Thermal Comfort Analysis of Art Centre Auditorium Utilizing R290 Refrigerant Chiller

Ardiyansyah Yatim, Ilya Adzani Pamuntjak, Fathurahman Yudhi
pages: 1246-1252 [Full text](#) DOI:10.18517/ijaseit.11.3.14485

Using Pixel-Based Image Classification to Identify City Structure Development in Balikpapan City, East Kalimantan

Hafadz Salam, Astrid Damayanti, Tito Latif Indra, Muhammad Dimiyati
pages: 1253-1259 [Full text](#) DOI:10.18517/ijaseit.11.3.12673

Skin Lesion Detection and Classification Using Convolutional Neural Network for Deep Feature Extraction and Support Vector Machine

Oscar P. Yanchatuña, Jackeline P. Pereira, Kevin O. Pila, Paola A. Vásquez, Keiko S. Veintimilla, Gandhi F. Villalba-Meneses, Omar Alvarado-Cando, Diego Almeida-Galárraga
pages: 1260-1267 [Full text](#) DOI:10.18517/ijaseit.11.3.13679

Pliocene to Pleistocene Stratigraphy of Rembang Zone, North East Java Basin, Indonesia

Khoiril Anwar Maryunani, Rubiyanto Kapid, - Djuhaeni, Wahyu Dwijo Santoso, Dasapta Erwin Irawan
pages: 1268-1272 [Full text](#) DOI:10.18517/ijaseit.11.3.10479

Collaboration with ASIA PACIFIC Network for Sustainable Agriculture, Food and Energy / SAFE NETWORK

© International Journal on Advanced Science, Engineering and Information Technology

Published by INSIGHT - Indonesian Society for Knowledge and Human Development

© IJASEIT - ISSN: 2088-5334 | e-ISSN : 2460-6952 | DOI : 10.18517



is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

00920141 [View My Stats](#)

International Journal on Advanced Science Engineering Information Technology

[HOME](#) [ARCHIVES](#)

Editorial Team

Editor in Chief :

Rahmat Hidayat, (Scopus ID: 57191265401) Politeknik Negeri Padang, INDONESIA

Associate Editors :

Taufik, (Scopus ID: 23670809800), California Polytechnic State University, USA
 Haitham Alali, (Scopus ID: 49963007000), Amman Arab University, JORDAN
 Wan Mohtar Wan Yusoff, (Scopus ID: 15019967700), Univ. Kebangsaan Malaysia, MALAYSIA
 Halimah Badioze Zaman, (Scopus ID: 25825801600), Univ. Kebangsaan Malaysia, MALAYSIA
 Son Radu, (Scopus ID: 7005251005), Universiti Putra Malaysia, Malaysia, MALAYSIA
 Mohd Razi Ismail, (Scopus ID: 25957691400), Universiti Putra Malaysia, MALAYSIA
 Takashi Oku, (Scopus ID: 56275094900), Prefectural University of Hiroshima, JAPAN
 Kohei Nakano, (Scopus ID: 7402011766), Gifu University, JAPAN
 Nurul Huda, (Scopus ID: 6701695514), Universiti Malaysia Sabah, MALAYSIA
 Yandra Arkeman, (Scopus ID: 55946558300), Bogor Agriculture University, INDONESIA
 Sate Sampattagul, (Scopus ID: 7801640861), Chiangmai University, THAILAND
 Peeyush Soni, (Scopus ID: 9248907800), Asian Institute of Technology, THAILAND
 Yolanda Lechon Perez, (Scopus ID: 6602826000), Ciemat, Madrid, SPAIN
 Gabriele Arcidiacono (Scopus ID: 56656284600), G. Marconi University, ITALY
 Alessandra Pieroni (Scopus ID: 25929524500), Marconi International University, Florida - USA
 Nguyen Hay, (Scopus ID: 15834645900) Nong Lam University, VIETNAM
 Rita Muhamad Awang, (Scopus ID: 55957782400), Universiti Putra Malaysia, MALAYSIA
 Anton S Prabuwo, (Scopus ID: 18134309800), King Abdulaziz Univ, SAUDI ARABIA
 P Mangala C S De Silva, (Scopus ID: 7006461145), University of Ruhuna, SRI LANKA
 Bich Huy Nguyen, (Scopus ID: 36191086100), Nong Lam University, VIETNAM
 Paul Kristiansen, (Scopus ID: 23097563600), University of New England, AUSTRALIA
 Amitava Basu, (Scopus ID: 21833738300), Bidhan Chandra Krishi Vidyalyaya, INDIA
 Shahrul Azman Mohd Noah, (Scopus ID: 35087633200), Universiti Kebangsaan Malaysia, MALAYSIA
 Luca Di Nunzio (Scopus ID: 57195199010), University of Rome Tor Vergata, ITALY
 Rocco Fazzolari (Scopus ID: 36469997900), University of Rome Tor Vergata, ITALY
 Ruben Paul Borg (Scopus ID: 55246483600), L-Università ta' Malta, Msida, Malta

Editors :

Nurhamidah, (Scopus ID: 57191636504), Andalas University, INDONESIA
 Ario Betha Juansilfero, (Scopus ID: 57189369470), Kobe University, JAPAN
 Zairi Ismael Rizman, (Scopus ID: 36959761800), Universiti Teknologi MARA (UiTM) (Terengganu) MALAYSIA
 Shahreen Kasim, (Scopus ID: 36155431900), Universiti Tun Hussein Onn - MALAYSIA
 Chi-Hua Chen, (Scopus ID: 35799698800), National Chiao Tung University, TAIWAN
 Abrar Ismardi, (Scopus ID: 26633102900), Telkom University - INDONESIA

IJASEIT

About

Editorial Board

Guide for Authors

Journal Contact

Online Submission

Peer Review Policy

Publication Ethics

Browse Authors

NEW Update : IJASEIT in Scopus

NEW Update : IJASEIT in Scimago JR

Scopus CiteScore

1.9 CiteScore²⁰²⁰
 65th percentile
 Powered by Scopus

Scimago Journal Rank



Anaerobic Digestion of Industrial Tempeh Wastewater with Sludge from Cow Manure Biogas Digester as Inoculum: Effect of F/M Ratio on the Methane Production

Yunus Fransiscus^{a,*}, Tuani L. Simangunsong^b

^a Chemical Engineering Department, University of Surabaya, Raya Kalirungkut, Surabaya, 60293, Indonesia

^b Centre for Environmental and Renewable Energy Studies, University of Surabaya, Raya Kalirungkut, Surabaya, 60293, Indonesia

Corresponding author: *yunus@staff.ubaya.ac.id

Abstract— Industrial tempeh wastewater contains high organic compounds that will negatively affect the water ecosystem's quality whenever discharged without proper treatments. Biological treatment, in particular, anaerobic digestion, is the potential to be an effective solution for eliminating that contaminant. Considering its advantages, especially to produce methane gas, a study to evaluate the anaerobic digestion process's performance to reduce the organic substances in industrial tempeh wastewater was conducted. Sludge from cow manure biogas digester was used as inoculum to foster an anaerobic decomposition process. Hence the particular focus was given to elaborate the effect of F/M ratio on methane production. With a practical volume of 4L each, controlled batch reactors were employed with several operational parameters (pH, COD, VFAs) to be monitored to understand the process. Results elucidated that methane production was closely related to the composition of the substrate to microorganism. The maximum methane production (8720 mL) followed by the highest organic reduction (67.7%) were found in F/M = 1.12. The measured operational parameters informed a sequence of the process involved in the complete anaerobic decomposition. Accumulation of VFAs, because of higher substrate loading, tended to hamper methanogens metabolism resulted in low methane production. In addition to that, inoculum from biogas digester of cow manure was proved to play a significant role in the anaerobic decomposition for industrial tempeh wastewater. This finding is essential for arranging an effective yet low-cost wastewater treatment for tempeh producers, which is a basis for further study.

Keywords— Anaerobic decomposition; F/M ratio; pH; COD; VFAs; methane.

Manuscript received 1 May 2020; revised 12 Dec. 2020; accepted 31 Jan. 2021. Date of publication 30 Jun. 2021.
IJASEIT is licensed under a Creative Commons Attribution-Share Alike 4.0 International License.



I. INTRODUCTION

Tempeh is one of the famous local foods in Indonesia, especially on Java island. It is usually served either in fried form or mixed with vegetables and meats in soup and curry. Besides, tempeh is also converted to crispy form and is known as a popular snack. Tempeh is made from soybean through a controlled fermentation process by using *Rhizopus oligosporus* as a binding agent. It is noted that this food is a good source of protein, dietary fiber, and vitamins (especially vitamin B). Centre for Information and Documentation–National Standardization Agency of Indonesia mentioned that there were 81,000 tempeh companies all over Indonesia, mainly in Java island, putting the country as the largest Tempeh producer among others [1]. This number could be more since the unit production scale

mostly in medium, small, or even micro (home industry) level.

Despite nutritional facts and positive economic stimulation, tempeh also produces wastewater as a by-product with harmful impacts on the ecosystem. During the production process, wastewater comes from washing, boiling, and soaking activities. Washing contributes the most considerable part of waste in terms of quantity, but boiling and soaking produce more concentrated wastewater. In practice, the amount of produced wastewater varies from one industry to another. However, the Ministry of Environment and Forestry, The Government of Indonesia, has set the maximum allowable quantity of wastewater as 10 m³ per ton treated raw material (soybean) [2]. Considering the used raw materials and involved processes, the characteristic of industrial tempeh wastewater is highly organic. It was reported that the COD and BOD values of

industrial tempeh wastewater could reach the value of 21,500 mg/L and 12,000 mg/L, respectively, with low pH conditions in the range of 3.7 to 5.0 [3]. Those values are far above the applied standard for the effluent industrial tempeh wastewater, which are 300 mg/L, 150 mg/L, and 6–9 for COD, BOD, and pH, respectively. Direct discharge of high loading organic wastewater to the river will seriously affect the ecosystem's balance by causing oxygen to sag. Rate of oxygen depletion in line with the amount of discharged organic substances, leading to the anaerobic condition. Furthermore, the impact will also link to the climate change issue because, with less or no oxygen content and the river's complexity condition, it will possibly result in greenhouse gasses production such as nitrous oxide (N₂O) and methane (CH₄).

Therefore, a reliable treatment method is needed to reduce the organic content to the lowest level to minimize industrial tempeh wastewater's negative impact. Among several options, biological treatment, particularly anaerobic digestion/fermentation, is considered the most effective solution for wastewater with high organic content. Anaerobic digestion requires less energy consumption than aerobic processes, especially from not using aeration system; it creates less environmental impact mainly due to low excessive sludge production and more straightforward operation [4]. Moreover, the anaerobic process will produce biogas (biohydrogen and methane) that substantially useful for alternative energy and, at the same time, will potentially reduce the treatment cost [5]. Despite the advantages, the removal efficiency of anaerobic treatment is known smaller than aerobic. For this reason, the application in the field scale is usually conducted in combination between anaerobic – anaerobic or anaerobic-aerobic to make sure the allowable effluent limit can be reached.

Anaerobic digestion has been reported to treat various types of industrial wastewater with high organic content such as automotive, petrochemical, sugar, cassava, palm oil, tofu, slaughterhouse/meat processing, and municipal wastewater [6]–[12]. Hence, based on the above considerations, the same process will be applied to treat wastewater from tempeh industry. In this study, anaerobic digestion experiments were done in batch mode, focusing on the effect of F/M (Food to Microorganism) ratio on methane (CH₄) production by using sludge from cow manure biogas digester.

II. MATERIALS AND METHODS

A. Materials

The wastewater used in this work was obtained from a medium-sized tempeh company in Surabaya, Indonesia. The company has followed the standardization system (ISO) and good manufacturing practice (GMP) with relatively stable market demand. The daily production capacity was 1000 Kg resulting in wastewater at about 6 m³ per day. In order to get characteristic information, wastewater was collected once a week during three months of observation. Each collected sample was analyzed for several parameters, and the mean value of the results is presented in Table 1. The inoculum was taken from a running biogas reactor of cow manure in the form of sludge. The inoculum's acclimation process was

conducted to increase the affinity to the substrate by introducing the wastewater to the sludge. The mixture ratios (%v/v) were gradually adjusted by increasing the proportion of tempeh wastewater (75:25; 50:50; and 25:75). In every cycle, the pattern of microorganism growth was observed, and when it came to the stationary phase, the harvested culture was introduced to the new ratio condition. The total solids (TS) and volatile solids (VS) values of acclimated inoculum were 29.8 g/L and 24.7 g/L, respectively.

For analysis purposes, the entire chemicals in this work (K₂Cr₂O₇, potassium hydrogen phthalate, Hg₂SO₄, H₂SO₄, Ag₂SO₄, NaOH) were in analytical grade (Merck and Sigma Aldrich) and used directly without any modifications or pre-treatments.

B. Methods

1) *Experimental Set-up*: Controlled batch reactor equipped with a paddle mixer, gas tube, sampling port, and control channel was used to run the anaerobic digestion experiments (Fig. 1). The reactor had a capacity of 5L, and the working volume for each run was 4L. In the beginning, pure nitrogen gas was injected into the reactor through a sampling port (elongated pipe up to the bottom of the reactor was available) to remove the remaining air (via gas tube) and create anaerobic conditions. F/M (Food to Microorganism) ratio, expressed in gCOD/gVSS, was set by using the same value of wastewater COD concentration (2 times diluted, 50% of actual concentration of tempeh wastewater) and adjusted the volatile solids (VS) of inoculum to result in several F/M ratio values (0.56; 1.12 and 1.92). pH of the mixture was adjusted at 7.8 by NaOH 2M before loading into the reactor [13]. The headspace was flushed with pure nitrogen gas for 5 minutes to avoid free oxygen intervention. During the anaerobic process, a gentle mixing (50 rpm) was applied for creating effective contact between the organic substances with the microorganism. The produced gas was collected into the Tedlar bag (CEL Scientific) and analyzed for its methane content daily. As for the liquid phase, sampling on wastewater was done every day through the sampling port, and analyses were done for several parameters (COD, VFA). The value of pH was monitored continually with pH-probe (SI-Analytic) through the control channel. All experiments were conducted in mesophilic conditions (30 ± 1°C) with three repetitions for each variation.

2) *Analytical Method*: Methane gas analysis was carried out by using Gas Chromatography (GC–Hewlett Packard 680 series) with FID detection and Helium gas as a carrier in HP-PLOT/Al₂O₃ column. The same instrument was used for VFA analysis, but in different conditions and detectors (Hydrogen as the carrier with ECD detector in HP-5, cross-linked 5% phenyl-methyl silicone column). The collected gas volume in the Tedlar bag was measured by vacuuming with a 60 mL syringe [14]. COD measurement was conducted following the APHA (American Public Health Association) standard with closed reflux and colorimetric method using UV-Spectrometer (Agilent) in 620 nm wavelength.

TABLE I
CHARACTERISTICS OF INDUSTRIAL TEMPEH WASTEWATER

Parameter	Unit	Value/Concentration
pH	-	4.62 ± 0.1
COD	mg/L	13,850 ± 618
BOD	mg/L	9200 ± 166
TS	mg/L	13,635 ± 280
TA	mg/L (CaCO ₃)	2000 ± 86
TN	mg/L	116 ± 4
N-NH ₃	mg/L	81.5 ± 5
SO ₄	mg/L	208 ± 12

TS = Total Solids, TA = Total Alkalinity, TN = Total Nitrogen

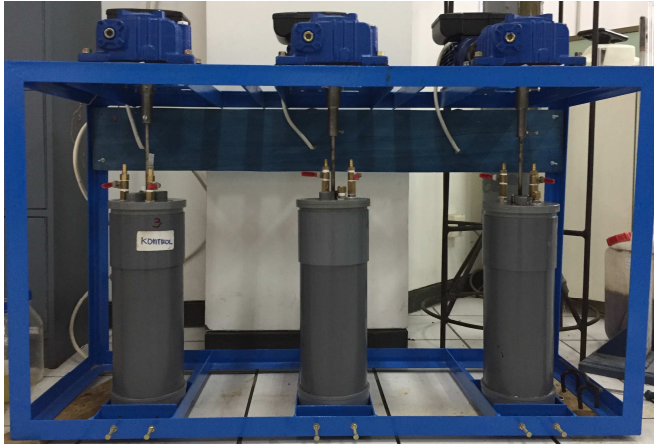


Fig. 1 Anaerobic batch reactors to perform anaerobic digestion for industrial tempeh wastewater.

III. RESULTS AND DISCUSSION

A. Methane Gas Production

The accumulation and daily production of methane gas from three different pre-treatments are presented in Fig. 2 and Fig. 3. The highest amount of methane gas for 21 days digestion period was produced from F/M ratio = 1.12 with a total volume 8720 mL. The second and third producers were F/M = 1.92 and 0.56 with total methane production of 6840 mL and 2460 mL, respectively. Meanwhile, as expected, in the control treatment (reactor with no additional inoculum/microorganism) insignificant volume of biogas was produced. As depicted in Fig.2, lag phase for F/M = 0.56 and 1.12 are similar, considered shorter than for F/M = 1.92. In the first 5 days, the total volume of methane from F/M = 0.56 and 1.12 are comparable but higher than F/M = 1.92. The production in F/M = 1.12 tends to be more stable, giving a constant increase throughout the experiment period. Although exhibiting slow progress initially, total biogas production from F/M = 1.92 starts to outweigh F/M = 0.56 at day 11 and enormously elevated, putting F/M = 1.92 second-largest methane producer at the end of a run.

System's response to the different F/M ratio is also expressed from the daily rate of methane production. Fig.3 delineates a rapid response of F/M = 0.56. At day 3 the system could produce methane gas as much as 340 mL/day that is quite superior compare to the others. However, F/M = 0.56 indicated a non-stable performance after that, as the daily production fluctuated. F/M = 1.12 has more stable progress; this composition's increasing rate continues until day 15 prior to the declining rate. Meanwhile, F/M = 1.92 exhibits a slower production rate, just reach the 200 mL/day

at day 8, but then progressively elevate to the maximum rate of 740 mL/day at day 16. Control treatment also produced methane gas, but the production rate was negligible if compared to the systems with inoculum addition.

Different methane production levels from anaerobic digestion are closely related to the substrate's ratio (food) to inoculum (microorganism). Lower biogas production in F/M ratio (0.56) indicates a limited substrate that is completely biodegraded. The incomplete decomposition could be related to the low metabolic activity of microorganisms [13]. Meanwhile, the slow increase in methane production in F/M = 1.92 could be attributed to the volatile fatty acids (VFA) accumulation, hindering a complete methanogenesis process. In higher F/M ratio less anaerobic inoculum was involved, meaning that the digesting ability was lower. Thus, organic biodegradability and substrate utilization rate decreased [15]. To better understand the process mechanism of methane production from industrial tempeh wastewater in different F/M ratios. Explanation about the dynamics of several operational parameters is given in the following sections.

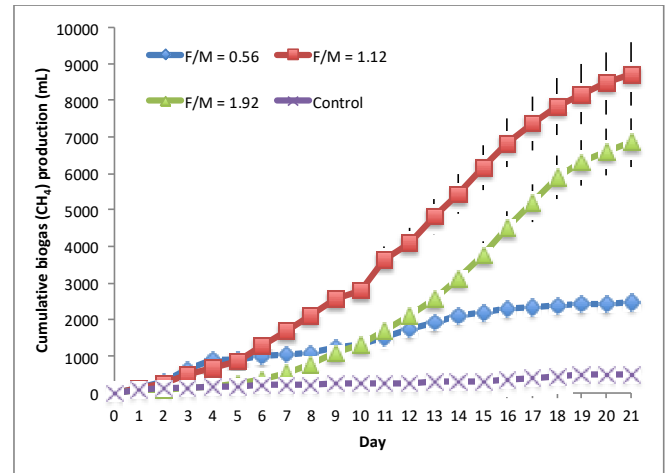


Fig. 2 Cumulative methane production from different F/M ratio

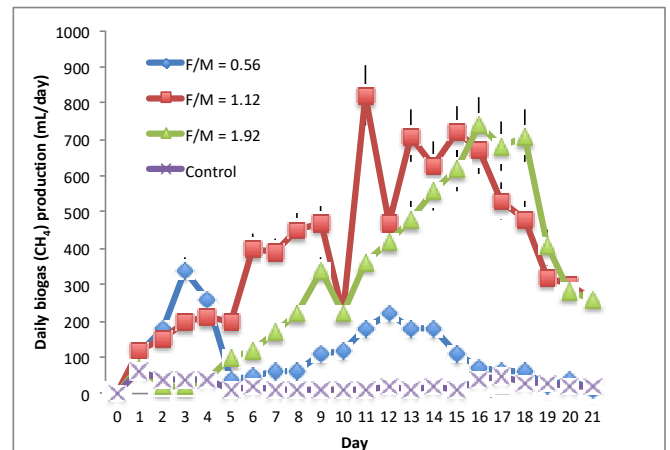


Fig. 3 Daily production of methane from different F/M ratio

B. The Dynamics of Process Parameters

Anaerobic digestion, a biological decomposition with no oxygen present, to convert organic substances into methane gas comprises four steps: hydrolysis, acidogenesis, acetogenesis, and methanogenesis [16]. At the first stage, complex organic compounds (carbohydrates, lipids, proteins)

are decomposed into soluble monomers (monosaccharides, fatty acids, amino acids) by involving several groups of hydrolytic microorganisms. In the acidogenesis process, hydrolysis products are converted into volatile fatty acids (VFAs) in the form of acetic acid, butyric acid and propionic acid, ammonia (NH₃) and gases (hydrogen/H₂, carbon dioxide/CO₂, and hydrogen sulfide/H₂S). VFAs are the main component for making methane gas, but the compounds shall be changed into acetate. In the third stage, acetogenesis, that conversion has occurred with carbon dioxide/CO₂ and hydrogen/H₂ as additional products. Lastly, in methanogenesis stage, methane gas can be produced from two possible pathways: acetotrophic by transforming acetate into methane/CH₄ and carbon dioxide/CO₂ and/or hydrogenotrophic by using carbon dioxide/CO₂ and hydrogen/H₂ gasses as the reactants [17]. Some parameters have been monitored in order to trace the methane production process in regard to F/M ratio.

1) *pH*: pH is one of the critical parameters to monitor the normality of the anaerobic process. Fig. 4 describes the transition of pH value from different F/M variation.


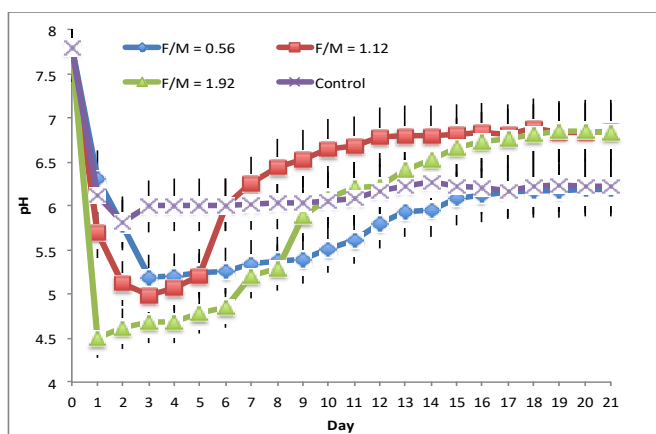


Fig. 4 pH transition during anaerobic digestion process from different F/M ratio

All three experiments had a similar pattern on the pH transition, decreased from the initial pH value (7.8) in the beginning phase before went up in the following days. F/M = 1.92 had the sharpest decline, reaching the lowest pH value of 4.5 and then progressively increased until 6.8 – 6.85 at day 18 to 21. F/M = 0.56 and 1.12 had similar pH value movement at the early days (5.0 – 5.25) but different increasing pattern and value at the end of the experiment, which was 6.19 and 6.85 respectively. The control experiment indicated a stagnant progression of pH after the small drop, keeping the value in the range of 6.01 – 6.23 from day 4 until the end of a run. The decrease of pH at initial stage connects to the VFAs production process, thus in some extent, the level of pH drop reflects the magnitude of produced VFAs [18]. The turn-back pattern designates that the acidogenesis process will be gradually completed and followed by acetogenesis or methanogenesis. This pH turn-back is important since methanogenesis is reported to have optimum performance at the pH of 6.8–7.2 [17], [19]. The pH increase's ability may be determined by the alkalinity of the substrate/inoculum involved (adjusted) and the breakdown result of protein compounds. It was

suggested to have alkalinity concentration in the range of 2500 – 5000 mg/L as CaCO₃ to provide strong buffering capacity for smoothing the methanogenesis process [13,14]. This study shows that the alkalinity of the system increased at the end of the experiment. Fig. 5 portrays the different alkalinity at the initial condition (before running) and at the end of the experiment (day 21). The variation of alkalinity concentration on the initial condition was attributed to the addition of NaOH and inoculum.

Meanwhile, the increase of alkalinity during the anaerobic progress is firmly due to the role of nitrogen. Besides various amino acid compounds, nitrogen, mostly in the form of ammonia (NH₃), is another product of protein decomposition in the hydrolysis phase. The presence of ammonia (NH₃) triggers two reactions that affect the alkalinity of the solution. The first reaction, reported by Zhang et al. [20], explains that ammonia will neutralize VFA via ionization as given in the following equation:



The second transformation of ammonia (NH₃) is following this stoichiometry equation:



Both reactions will boost the buffering capacity enabling the pH level to move up along the substrate decomposition. The indication of ammonia (NH₃) transformation was corroborated by the different concentrations between day 1 (when the hydrolysis phase occurred) and day 21, as shown in Fig. 6.

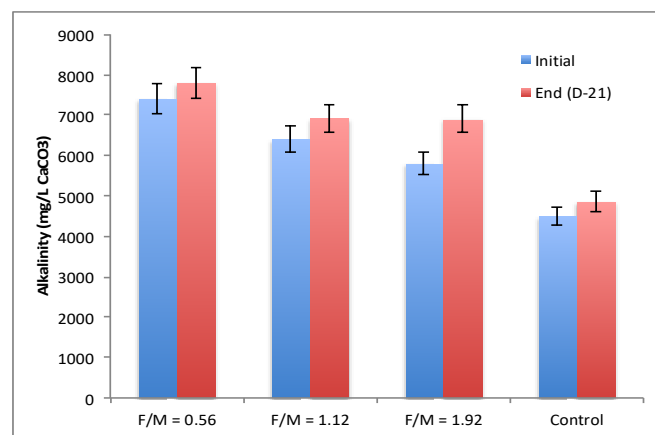


Fig. 5 The difference of alkalinity (as CaCO₃) concentration at the initial and end of the experiment

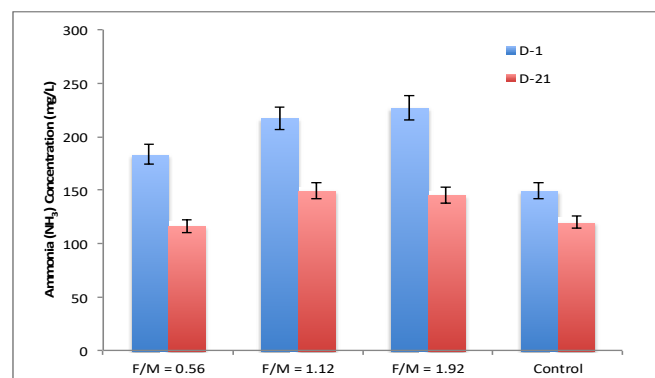


Fig. 6 The reduction of ammonia (NH₃) concentration during the anaerobic decomposition

However, apart from its beneficial role, the presence of free ammonia in certain amount is reported to inhibit methanogenic microorganisms. Up to the maximum concentration of 200 mg/L as total ammonia nitrogen (TAN) is still positive for the anaerobic decomposition, but whenever the concentration is more than 1500 mg/L it will lead to serious suppression [21]. More specifically, it was advised to keep the free ammonia (NH_3) at below 200 mg/L to avoid obstruction [17]. On day 1, the ammonia concentration in F/M = 1.12 and 19.2 were slightly above the recommended level, 217 and 226 mg/L, respectively. Nevertheless, methane gas was still produced noting that the decrease of ammonia concentration during the progress smoothing the methanogenesis stage. Initial pH condition (7.8) in all F/M variations supported by alkalinity from the ammonia transformation was favorable for industrial tempeh wastewater's anaerobic digestion. In particular, since the pH for F/M = 1.12 and 1.92 were closed to the ideal condition, more methane was produced.

2) *Volatile Fatty Acids (VFAs)*: VFAs, vital intermediate products for complete anaerobic digestion, are produced during the acidogenesis stage. The number of products is influenced by the substrate availability (organic loading) as well as biomass load and types. VFAs consist of several forms of acid such as acetic, butyric, propionic, n-butyric, iso-butyric, iso-valeric, and n-valeric can be used as a carbon source for the making of methane gas [22]. Based on that, VFAs production in anaerobic decomposition need to be monitored as an indicator for the potential of biogas production. Tempeh wastewater with sludge from cow manure digester tank as inoculum produced VFAs in all treatment conditions. The VFAs formation was dominated by acetic acid, while butyric and propionic were observed in smaller amount. The dominance of acetic acid was beneficial as it was reported that acetic acid (and butyric) could be used directly by methanogens; meanwhile, propionic acid was recognized as direct inhibitor for the methanogens, especially whenever the concentration reaches 1g/L [17], [23], [24].

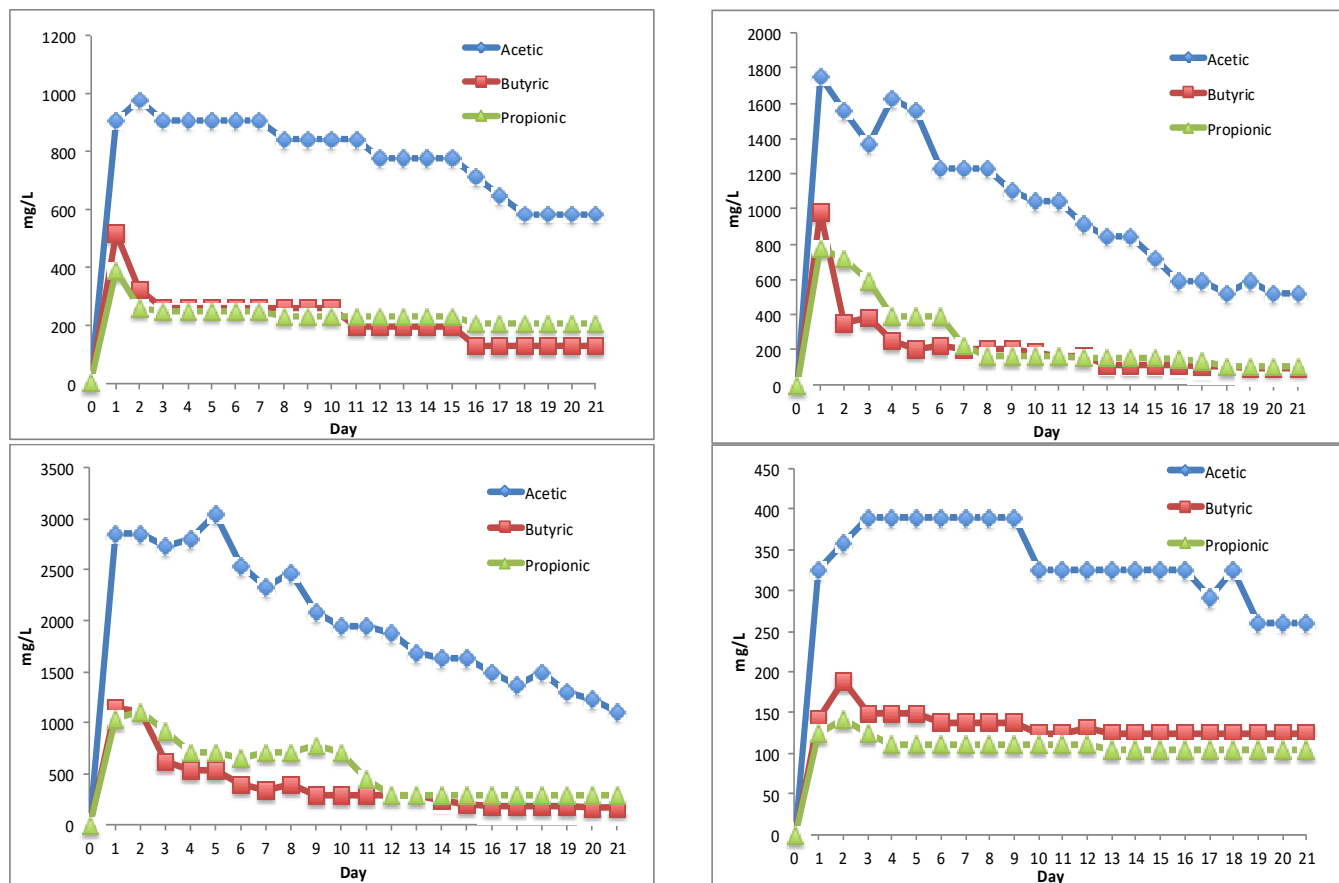


Fig. 7 Volatile fatty acids (VFAs) in three different F/M ratios and control treatment

The metabolism rate of methanogens is different from the production rate of VFAs. The activity of methanogens is susceptible to ammonia toxicity and a low level of pH [25]. The high organic loading to the system triggers level of ammonia toxicity and pH drop. More VFAs will be produced in this condition, resulting in pH drop, and subsequently affecting the composition of ionized ammonia (NH_4^+) and free ammonia (NH_3). In this case, free ammonia (NH_3) is the direct inhibitor to the methanogens because of

its high permeability to the cell membranes [19]. In this study, it was indicated that ammonia (NH_3) did not severely affect biogas production, considering that the concentration still at an acceptable level (Fig. 6). Therefore, a plausible explanation for the different production gas in different F/M ratios could be attributed to the VFAs production. As can be seen in Fig. 7, this compound was fabricated at the early stage of the process, with the highest concentration of acetic acid found in F/M = 1.92, as much as 3000 mg/L, and

subsequently followed by $F/M = 1.12$ (1800 mg/L) and $F/M = 0.56$ (900 mg/L). Thereafter, the acetic acid concentration tends to decline for the rest of the observation periods; a similar trend applied for butyric and propionic acids. The decrease of VFAs is related to the formation of methane gas; as the pH went up to the amicable level (as shown in Fig. 4), methanogens will start to convert acetate into the gas. A steeper decline is noticed in $F/M = 1.12$. This pattern corresponds to the shorter time needed by this variation to achieve higher pH value, indicating a better balance condition of the amount of produced VFAs and methanogens metabolism. Thus, process conversion of VFAs into methane was faster in $F/M = 1.12$, compared to those in $F/M = 0.56$ and 1.92, giving the highest total volume of methane. Similar VFAs decrease and pH increase are also perceived for $F/M = 0.56$ and 1.92 reflecting the methanogenesis rate. In a high F/M ratio (1.92), meaning more substrate available, the produced VFAs was almost double than in $F/M = 1.12$ and triple than 0.56. The huge production also validated by the lowest drop of pH among others, as illustrated in Fig. 4. This condition is lowering the rate of methanogens metabolism resulting in lower methane gas production. However, as the VFAs were no more produced (the total accumulation reduced), methanogens converted it into biogas more optimally, supported by the achieved ideal pH condition. Hindrance to methanogens activity because of VFAs accumulation and pH drop in high substrate loading was also reported by Zhang *et al.* [26] and Cuff *et al.* [27]. As for the $F/M = 0.56$, it was expected that the rate of methane production could be the fastest, as the number of biomass was about double the available organic substrate, but the data revealed a divergent pattern. Indeed, at the beginning, $F/M = 0.56$ has higher daily production compared to others. However, the pattern changed unexpectedly (Fig. 3), indicating instability. The declining pattern of VFAs, especially for acetic acid, is relatively flat (Fig. 7), designating low bioactivity. Raposo *et al.* [13] pointed out that even though it will avoid inhibition effect at low substrate concentration, microorganisms tend to perform slow metabolism. It is reported that at a low F/M ratio, enzyme reactions for primary mineralization would be impeded [28], [29]. After the production stage, TVAs contents in control treatment remained constant. Without any inoculum, it was notable that the hydrolysis and acidogenesis process were very limited and methanogenesis did not significantly occur. By comparing to three others, it can be affirmed that inoculum from the biogas reactor of cow manure contained sufficient *acetogenins* and *methanogens*.

3) *Organic Removal (COD)*: As the primary target substrate for microorganisms, organic substances in the wastewater will reduce as microbial activities occurred. If complete anaerobic digestion passes off through the final phase, methanogenesis, these compounds will be converted into gases, which are methane (CH_4) and carbon dioxide (CO_2) [30]. It means the presence of organic materials will be no longer traceable in the aqueous phase. Therefore, organic substances' transition could be one of the clear indicators to monitor anaerobic digestion's smooth running. Fig 8, denotes the passage of COD removal during the run for all F/M variations.

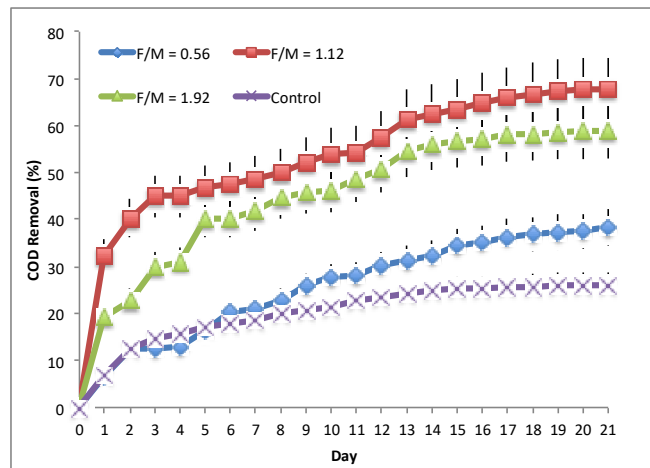


Fig. 8 COD removal in three different F/M ratios and control treatment

For the same period of the experiment, $F/M = 1.12$ has the biggest COD removal as high as 67.7% following by $F/M = 1.92$ and 0.56 which were 58.9% and 38.4% respectively. In correspond to Fig.7, total COD removal may be accounted for acetic, butyric, and propionic abatement. Total COD removal of 67.7% in $F/M = 1.12$ relevant to the reduction of 71.1% of acetic, 90.1% butyric and 86.7% propionic acid. For $F/M = 1.92$, 58.9% COD removal fit to the decrease of 63.2% acetic, 84.6% butyric and 74.1% propionic acid. Meanwhile 38.4% COD removal in $F/M = 0.56$, reflects the decline of 35.7% acetic, 75.0% butyric and 46.7% propionic acid. As a comparison, control treatment has total COD removal of 26.2% connected to the less 33.3% acetic, 34.5% butyric and 27.3% propionic acid.

IV. CONCLUSIONS

The use of sludge from cow manure biogas digester as inoculum successfully promoted an anaerobic digestion process for industrial tempeh wastewater. The composition of food to microorganism (F/M ratio) played a significant role in determining the total volume of produced methane and COD removal. In this study, $F/M = 1.12$ produced the biggest volume of methane with a total of 8720 mL and gave the highest COD removal as much as 67.7% for 21 days. The measured operational parameters divulge the number of available substrates connect to the extent of VFAs production, which induces the rate of methane production. This finding is very useful as basic information for arranging suitable and beneficial (in terms of bio-energy collection) wastewater treatment for tempeh producers, especially when considering that these industries are mostly in small-medium level.

ACKNOWLEDGMENT

The authors are grateful to the Association of Tempeh Producers in Surabaya for supplying wastewater. The authors also acknowledge the full support from the Laboratory Bioprocess Technology and Environmental Process staff during the experiment.

REFERENCES

- [1] Badan Standarisasi Nasional (2012) Tempeh: Persembahan Indonesia untuk Dunia [online]. Available: bsn.go.id/uploads/download/Booklet_tempeh-printed21.pdf
- [2] Ministry of Environment, The Government of Indonesia (2014) The Decree on Effluent Standard for Industrial Wastewater [online]. Available: menlhk.co.id/simppuh/public/uploads/files/MLH%20P.5.pdf
- [3] L.C Direstiyani, "Review on the application of combination between anaerobic baffled reactor (ABR) and anaerobic/aerobic biofilter (AF) for treating industrial tempeh wastewater", M.Eng thesis, Sepuluh Nopember Institute of Technology (ITS), Surabaya, Indonesia, 2016.
- [4] A. Goli, A. Shamiri, S. Khosroyar, A. Talaiekhosani, R. Sanaye, K. Azizi, "A review on different aerobic and anaerobic treatment methods in dairy industry wastewater", *J. Environ. Treat. Tech.*, vol.6 (1), pp. 113-141, 2019.
- [5] I.F.S Santos, R.M Barros, G.L.T Filho, "Electricity generation from biogas of anaerobic wastewater treatment plants in Brazil: an assessment of feasibility and potential", *Journal of Cleaner Production*, vol.126, pp. 504-514, 2016.
- [6] A. Elreedy, A. Tawfik, A. Enitan, S. Kumari, F. Bux, "Pathways of 3-biofuels (hydrogen, ethanol and methane) production from petrochemical industry wastewater via anaerobic packed bed baffled reactor inoculated with mixed culture bacteria", *Energy Conversion and Management*, vol. 122, pp. 119-130, 2016.
- [7] B. Wang, Y. Li, D. Wang, R. Liu, Z. Wei, N. Ren, "Simultaneous coproduction of hydrogen and methane from sugary wastewater by an ACSTR_H-UASB_{Met} system", *International Journal of Hydrogen Energy*, vol. 38, pp. 7774-7779, 2013.
- [8] P. Intanoo, P. Rangsanvigit, P. Maalakul, S. Chvadej, "Optimization of separate hydrogen and methane production from cassava wastewater using two-stage upflow anaerobic sludge blanket reactor (UASB) system under thermophilic operation", *Bioresource Technology*, vol. 173, pp. 256-265, 2014.
- [9] Y.S Wong, T.T Teng, S.A Ong, M. Norhashimah, M. Rafatullah, J.Y. Leong, "Methane gas production from palm oil wastewater-an anaerobic methanogenic degradation process in continuous stirred suspended closed anaerobic reactor", *Journal of the Taiwan Institute of Chemical Engineers*, vol.45, pp. 896-900, 2014.
- [10] V. Stazi, M.C. Tomei, "Enhancing anaerobic treatment of domestic wastewater: state of the art, innovative technologies and future perspectives", *Science of the Total Environment*, vol. 635, pp. 78 – 91, 2018.
- [11] M. Sarioglu (Cebeci), O.B Gokcek, "Treatment of automotive industry wastewater using anaerobic batch reactors: the influence of substrate/inoculum and molasses/wastewater", *Process Safety and Environmental Protection*, vol. 102, pp. 648-654, 2016.
- [12] A. Aziz, F. Basheer, A. Sengar, Irfanullah, S.U. Khan, I.H. Farooqi, "Biological wastewater treatment (Anaerobic-aerobic) technologies for safe discharge of treated slaughterhouse and meat processing wastewater", *Science of The Total Environment*, vol. 686, pp. 681 – 708, 2019.
- [13] F. Raposo, M.A D Rubia, V. Fernandez-Cegri, R. Borja, "Anaerobic digestion of solid organic substrates in batch mode: an overview relating to methane yields and experimental procedures", *Renewable and Sustainable Energy Reviews*, vol. 16, pp.861-877, 2011.
- [14] P. Latifi, M. Karrabi, S. Danesh, "Anaerobic co-digestion of poultry slaughterhouse wastes with sewage sludge in batch-mode bioreactors (effect of inoculum-substrate ratio and total solids)", *Renewable and Sustainable Energy Reviews*, vol. 107, pp. 288-296, 2019.
- [15] C. Mao, J. Xi, Y. Feng, X. Wang, G. Ren, "Biogas production and synergistic correlations of systematic parameters during batch anaerobic digestion of corn straw", *Renewable Energy*, vol. 132, pp. 1271-1279, 2019.
- [16] A. Schnurer, A. Jarvis, "A. Microbiological handbook for biogas plants", *Swedish Waste Management*, Rep. 1 – 74, 2010.
- [17] S. Sarker, J.J Lamb, D.R Hjelme and K.M Lien, "A review of the role of critical parameters in the design and operation of biogas production plants", *Applied Science*, vol. 9, pp. 1-38, 2019.
- [18] E. Elbeshbishy, G. Nakhla, "Batch anaerobic co-digestion of proteins and carbohydrates", *Bioresource Technology*, vol. 116, pp.170-178, 2012.
- [19] T. Sayara and A. Sanchez, "A review on anaerobic digestion of lignocellulosic wastes: pre-treatments and operational conditions", *Applied Sciences*, vol. 9, pp. 1-23, 2019.
- [20] C. Zhang, G. Xiao, L. Peng, H. Su, T. Tan, "The anaerobic co-digestion of food waste and cattle manure", *Bioresource Technology*, vol. 129, pp. 170 – 176, 2013.
- [21] A. Xia, J. Cheng, J.D Murphy, "Innovation in biological production and upgrading of methane and hydrogen for use as gaseous transport biofuel", *Biotechnology Advances*, vol. 34, pp. 451-472, 2016.
- [22] J. Jiang, Y. Zhang, K. Li, Q. Wang, C. Gong, M. Li, "Volatile fatty acids production from food waste: effects of pH, temperature and organic loading rate", *Bioresource Technology*, vol. 143, pp. 525-530, 2013.
- [23] Y. Wang, B. Zang, X. Gong, Y. Liu, G. Li, "Effects of pH buffering agents on the anaerobic hydrolysis acidification stage of kitchen waste", *Waste Management*, vol. 68, pp. 603-609, 2017.
- [24] C.P.C Bong, L.Y Lim, C.T Lee, J.J Klemes, C.S Ho, W.S Ho, "The characterization and treatment of food waste for improvement of biogas production during anaerobic digestion – a review", *Journal of Cleaner Production*, vol. 172, pp. 1545-1558, 2018.
- [25] S. Hedge and T.A Trabold, "Anaerobic digestion of food waste with unconventional co-substrates for stable biogas production at high organic loading rates", *Sustainability*, vol.11, pp. 1-15, 2019.
- [26] W. Zhang, L. Li, W. Xing, B. Chen, L. Zhang, A. Li, R. Li and T. Yang, "Dynamic behaviors of batch anaerobic systems of food waste for methane production under different organic loads, substrate to inoculum ratios and initial pH", *Journal of Bioscience and Bioengineering*, vol. 128, pp. 733-743, 2019.
- [27] G. Cuff, A.E. Turcios, E.M. Pajooh, O. Kujawski, D. Weichgrebe, K.H. Rosenwinkel, "High-rate anaerobic treatment of wastewater from soft drink industry: methods, performance and experiences", *Journal of Environmental Management*, vol. 220, pp. 8 – 15, 2018.
- [28] S.K Awasthi, R. Joshi, H. Dhar, S. Verma, M.K Awasthi, S. Varjani, S. Sarsaiya, Z. Zhang, S. Kumar, "Improving methane yield and quality via co-digestion of cow dung mixed with food waste", *Bioresource Technology*, vol. 251, pp. 259-263, 2018.
- [29] F.M Pelleria, E. Gidakos, "Effect of substrate to inoculum ratio and inoculum type on the biochemical methane potential of solid agroindustrial waste", *Journal of Environmental Chemical Engineering*, vol. 4, pp. 3217-3229, 2016.
- [30] D.P Van, T. Fujiwara, B.L Tho, P.P.S Toan, G.H Minh, "A review of anaerobic digestion systems for biodegradable waste: configurations, operating parameters and current trends", *Environmental Engineering Research*, vol. 25(1), pp. 1-17, 2020.