

## Trajectory Tracking of AR.Drone Quadrotor Using Fuzzy Logic Controller

Agung Prayitno, Veronica Indrawati, Gabriel Utomo

Electrical Engineering Department, University of Surabaya (UBAYA)

Jl. Raya Kalirungkut – Surabaya 60293, East Java – Indonesia, Tel.+62-31-2981157

e-mail: prayitno\_agung@staff.ubaya.ac.id<sup>1</sup>, veronica@staff.ubaya.ac.id<sup>2</sup>, gabriel.u92@gmail.com<sup>3</sup>

### Abstract

*In this paper, Fuzzy Logic Controller (FLC) is implemented in the AR.Drone quadrotor in order to make it follow a given trajectory reference. The distance between the position and angle of the AR.Drone to the reference point is used as the input of the FLC. As for the output, pitch value and yaw rate will be the controlling signal for the AR.Drone. The navigation data of the AR.Drone are forward speed ( $v_x$ ), sideward speed ( $v_y$ ), and yaw. These navigation data are going to be used to estimate positions and orientation of the AR.Drone. To compensate for the y-position drift, the value of  $v_y$  is also used as a criterion to determine the roll compensation. The FLC algorithm is implemented to AR.Drone 2.0 Elite Edition using LabVIEW software. Also, the algorithm has been tested in various trajectories such as a straight line, a straight line with a perpendicular turn, a rectangular trajectory and a curved trajectory. The results have shown that AR.Drone can follow a given trajectory with various initial positions and orientations quite well.*

**Keywords:** AR.Drone trajectory tracking, AR.Drone control, fuzzy logic controller

### 1. Introduction

A helicopter with four equally spaced rotors usually arranged diagonally is commonly known as the Quadrotor. In recent years, the quadrotor has become one of the most highly developed fields of research. This platform is chosen because of its mechanical construction which is quite simple yet able to hover in a stationary manner, to vertically descend (yaw), fly slowly, or even manoeuvre swiftly. On the other hand, this aircraft has several shortcomings such as limited energy supply and limited load capacity. Another shortcoming of this aircraft is that it is quite arduous to control because the aircraft is inherently un-stable [1]. However, many applications had been produced utilizing this quadrotor, such as monitoring and analysing traffic, aerial photography and video, aerial surveillance and intelligence gathering (law enforcement), property assessment and real estate promotion etc. [2]. However, most of those applications are still operated manually by an operator on a ground station.

In order for a quadrotor to fly autonomously, naturally an autonomous flight task control, which enables the quadrotor to manoeuvre, needs to be designed. Vertical take off, landing, hover flight, tracking an object or path and trajectory tracking is included in said Autonomous flight task. The development of the design and control algorithms is quite an interesting topic to research. In order to save time, a good platform, in other words a good quadrotor in terms of its hardware, is used so that the control algorithm can be designed immediately on that platform. One of the said platforms, which is also used in this research is the AR.Drone.

According to [3], there are several layers that implements autonomous UAV. The first layer is the kernel control, which is responsible for its asymptotic stability. The second layer is the command generator, which plays a role in triggering the flight sequences command in kernel control. The third layer is flight scheduling, which is basically to set the flight plan, flight task, and references. AR.Drone has already been equipped with the first layer, which receives its flight sequences command through Wi-Fi. Angle stabilisation and vertical speed are controlled by software on-board the AR.Drone. However, the AR.Drone is yet to be equipped with the second and third layer, which allows the researcher to explore various control algorithms to implement AR.Drone, which ultimately enables the AR.Drone to perform its myriad applications.

Nowadays AR.Drone is one of the most commonly used quadrotors as a research platform in most of the leading universities worldwide. AR.Drone is chosen in this research as a platform because of its relatively cheap price and its on-board electronics. The on-board electronics are already equipped with a motherboard, a processor, a Wi-Fi chip, an

accelerometer sensor, a gyroscope sensor, an ultrasonic sensor, microcontroller and two cameras. This platform is also equipped with a real-time operating system which enables it to perform various tasks simultaneously, such as a ground system communication through Wi-Fi, sensor acquisition, video data sampling, image processing, state estimation and closed-loop control [4].

In this particular research, the type of AR.Drone used is the AR.Drone 2.0 Elite Edition, which is shown in Figure 1. Essentially this AR.Drone consists of a carbon fibre framework, aircraft chassis and a foam cover, 4 motors and propellers, inner-board electronics and 2 cameras. The essential components from the AR.Drone are as follows: 4 brushless inrunner motors. 14.5W 28,500 RPM, 1GHz 32 bit ARM Cortex A8 processor with 800MHz video DSP TMS320DMC64x, 1GB DDR2 RAM at 200MHz, 3 axis gyroscopes 2000%/second precision, 3 axis accelerometers  $\pm 50\text{mg}$  precision, 3 axis magnetometers  $6^\circ$  precision, Pressure sensor  $\pm 10$  Pa precision, Ultrasound sensors for ground altitude measurement, 60 FPS vertical QVGA cameras for ground speed measurement, Linux 2.6.32, USB 2.0 high speed for extensions, Wi-Fi, HD Camera. 720p 30FPS [5].

The internal controller of the AR.Drone allows the user to control the flight manoeuvre of the AR.Drone easily because essentially an AR.Drone is designed as a reality game. The application to control the AR.Drone is acquired easily by downloading in Google Play for Android devices or AppStore for iOS devices. Some of the said applications are AR.FreeFlight 2.0 and AR.Race 2. However, Parrot, as the producer of the AR.Drone had also included a Software Development Kit (SDK) [6] which enables the users to access the AR.Drone through Wi-Fi to control it, design their own control algorithm, and perform various data acquisition through various software.

Through the included internal controller, the users are able to do a few basic controls, which already covered take-off, landing, hover and emergency stop. Each and every one of those control commands has closed-loop control in the internal controller of the AR.Drone. As an example of take-off command, the internal controller will do several things in sequence as follows: [7]

- Start the motors.
- Increase the amount of thrust on all of the propellers uniformly in order to raise the altitude of the AR.Drone until it reaches its stable point (approximately 1 metre).
- Make sure that the speed of the rotor is still at zero attitudes (roll, pitch) and zero yaw.
- Monitor the bottom camera in order to retain the drone's position just above its take-off point.

In addition to those basic control commands, the users are also able to control the manoeuvre of the AR.Drone, such as pitch, roll, yaw rate and vertical rate. When all these four inputs are null (zero in value) then, automatically, the drone will function, as it will be in a hover condition. The outputs of the AR.Drone can actually be recorded, which are as follows: actual roll angle, forward speed  $v_x$ , x-position estimation, actual roll angle, sideward speed  $v_y$ , y-position estimation, yaw rate, yaw estimation, vertical rate, altitude, video from bottom camera and front camera.

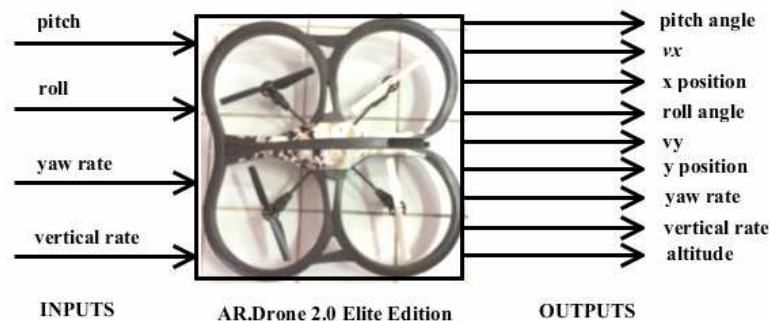


Figure 1. Input-Output configuration of the AR.Drone

AR.Drone has six degrees of freedom (DOF), which are three translational components (position at  $x$ ,  $y$ ,  $z$  axis) and three rotational components (pitch, roll and yaw angles) as shown in Figure 2. The central point of the AR.Drone is actually the centre of the coordinates with the  $x$  axis in the same direction as the front camera. The translational speed of the AR.Drone is stated with forward speed  $v_x$ , sideward speed  $v_y$  and vertical speed  $v_z$ . Pitch is an angle of the rotational movement of the AR.Drone on the  $y$ -axis, while roll is the angle of the rotational movement of the AR.Drone on the  $x$ -axis, and yaw is the angle of the rotational movement of the AR.Drone on the  $z$ -axis. Those variables are the output of the AR.Drone, which is caused by the combination of the four control signal inputs (roll rate, pitch rate, yaw rate, and the vertical rate).

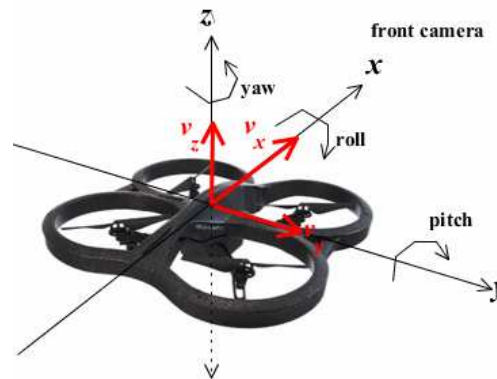


Figure 2. AR.Drone's degree of freedom

Prior to this research, many researches have been made with various types of quadrotor and with AR.Drone as their platform. Michael Mogenson [8] created the AR.Drone LabVIEW toolkit which enables researchers, lecturers or students to further their understanding of the AR.Drone 1.0. With this toolkit it is possible for the users to control, read navigation data and analyse picture data from both of the on-board cameras. Krajnik et al. [1] explained how the AR.Drone is suitable as the platform for various research and educational purposes. In that paper, the hardware and the software of the AR.Drone, how to acquire various data such as model dynamic from its drone system using data modelling, and some basic algorithms to obtain position stabilization, object following and autonomous navigation are described and explained. Sun Yue [9] modelled and identified several model parameters through various experiments. According to the dynamic model obtained, the local controller, global controller and filter are designed. To control throttle, roll, pitch, and yaw a local controller is used. While for the position control, a global controller is used with Kinect as the sensor. The filter is used in order to reduce the amount of noise at the sensor. Jacco and Mario [3] used a combination of GPS sensor and barometer sensors in order to determine the position of the drone. The GPS sensor is used to determine the horizontal position while the barometer is used for the altitude of the drone. Guilherme et al. [10] used a predictive and nonlinear robust control to solve path-tracking problems on quadrotors. They used MPC for solving the trajectory tracking and nonlinear  $H_\infty$  controller for stabilization of the rotation.

In this paper, the fuzzy logic controller is designed and implemented in AR.Drone 2.0 Elite Edition in order to follow a given reference trajectory in space coordinate. The controller itself will be implemented using LabVIEW software. An example of the application of this algorithm is autonomous flight control with various manoeuvres for entertainment purposes.

## 2. Research Method

To implement a fuzzy logic algorithm in completing trajectory tracking with AR.Drone 2.0, there are several stages that need to be completed. The first stage is to prepare the computer program at the ground station in order to access AR.Drone's on-board electronics through Wi-Fi. The first stage is needed in order to monitor, control and acquire data. For this

purpose, AR.Drone LabVIEW Toolkit [8],[11], which is designed for AR.Drone 1.0 was re-modified so that its block diagram and front panel is suitable for the AR.Drone 2.0. A few of the most important modifications which were carried out were updating the firmware to the 2.4.8 version, modifying the delivery of AT\*REF and AT\*PCMD to make it send alternately, improving the computer access communication with user datagram protocol (UDP) on its on-board electronics, and also adjusting the front panel so that it satisfied the control, data acquisition and monitoring requirements when implementing the trajectory tracking in this research. To summarize, the result of the final modification means the computer program will have a data flow as shown in Figure 3.

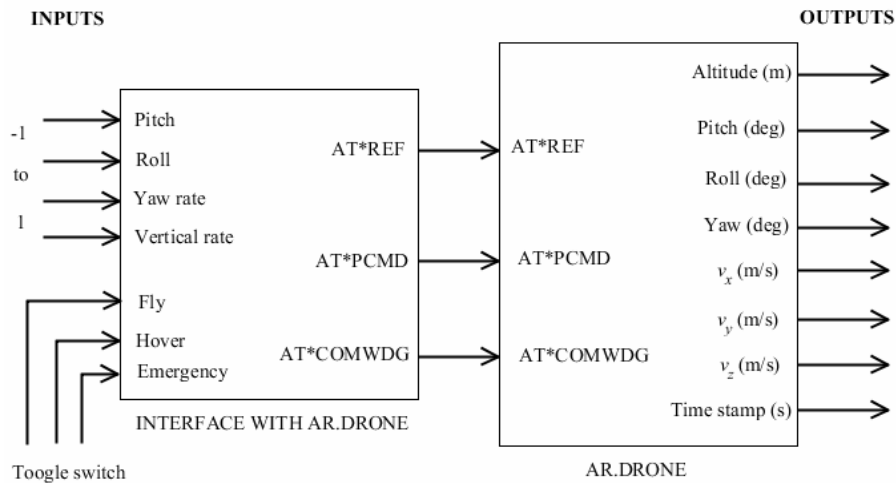


Figure 3. Data flow program at LabVIEW for AR.Drone 2.0

The next stage is to design the control scheme, which will be applied in the AR.Drone. The controlled system block diagram, which will be used in this research, is shown in Figure 4. Essentially, there are five subsystems as follows: subsystem AR.Drone, subsystem fuzzy logic controller, subsystem distance and angle calculation, subsystem position and orientation calculation, and also subsystem roll compensation. The subsystem of the AR.Drone is a system within the AR.Drone, which is controlled via Wi-Fi and prepared at previous stages. Subsystem distance and angle calculation prepared the value of distance and angle which are the inputs of the fuzzy logic controller. The value of distance ( $r$ ) is the distance between reference points ( $x_{ref}, y_{ref}$ ) and its current position ( $x, y$ ), while the angle ( $\alpha$ ) is the angle between the reference point ( $\beta$ ) and its current orientation ( $\psi$ ) as shown in Figure 5.

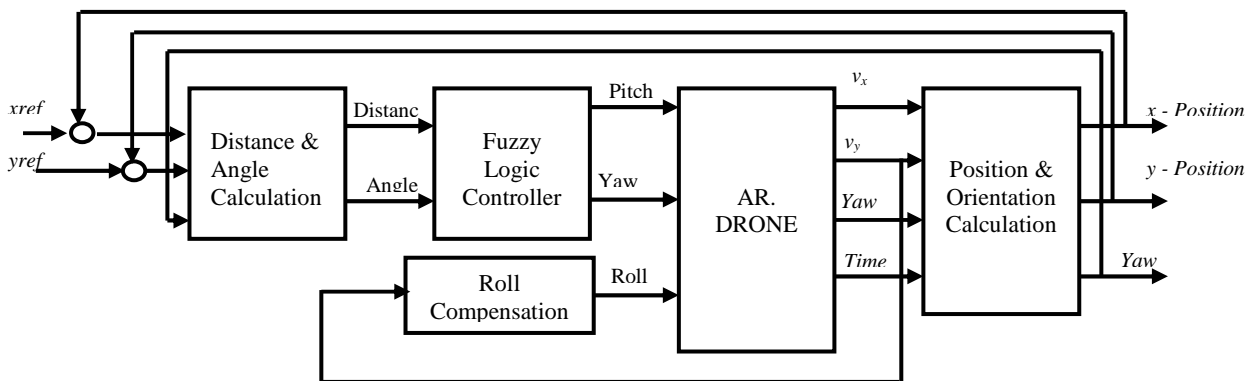


Figure 4. Block diagram of FLC controlled system

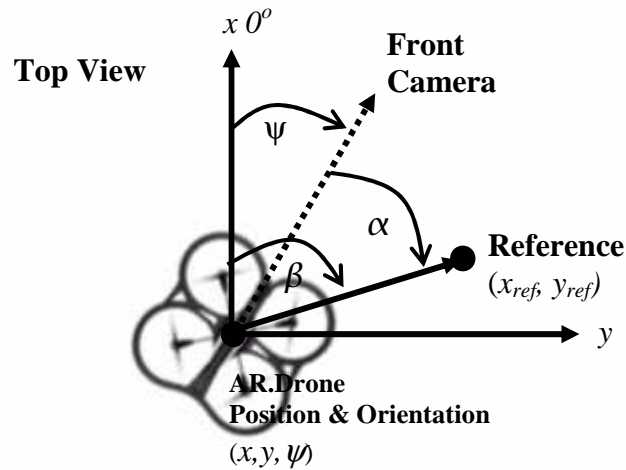


Figure 5. Distance and angle calculation

The distance ( $r$ ) can be obtained using equation (1).

$$r = \sqrt{(x_{ref} - x)^2 + (y_{ref} - y)^2} \quad (1)$$

While the angle ( $\alpha$ ) calculation is made with an algorithm as follows:

$$\beta = \frac{\arctg\left(\frac{y_{ref} - y}{x_{ref} - x}\right)}{\pi} \cdot 180;$$

**if**  $|\beta - \psi| < 180^\circ$  **then**  
 $\alpha = \beta - \psi;$

**else**

**if**  $\beta < 0^\circ$  **then**  
 $\beta = 360 - |\beta|;$

**end if**

**if**  $\psi < 0^\circ$  **then**  
 $\psi = 360 - |\psi|;$

**end if**

$\alpha = \beta - \psi;$

**end if**

The fuzzy logic controller's subsystem has two inputs, which are distance ( $r$ ) and angle ( $\alpha$ ) and two outputs which are pitch ( $\theta$ ) and yaw rate ( $\psi_{rate}$ ). For the distance input, in this research, the range of distance used is from 0 to 2 metres and is stated in five triangular membership functions. For the angle input, the range of angles used is from  $-60^\circ$  to  $60^\circ$ , which is also stated in five triangular membership functions. The output pitch varies from  $-0.075$  to  $0.075$ , which is divided into five triangular membership functions. While yaw rate varies from  $-0.4$  to  $0.4$  and is also divided into five triangular membership functions. With two kinds of inputs with each of the five membership functions and also two outputs, then a  $2 \times 25$  rule is used in this

particular fuzzy logic controller. The defuzzification output used the centre of gravity method. Further details of this design are shown in Figure 6.

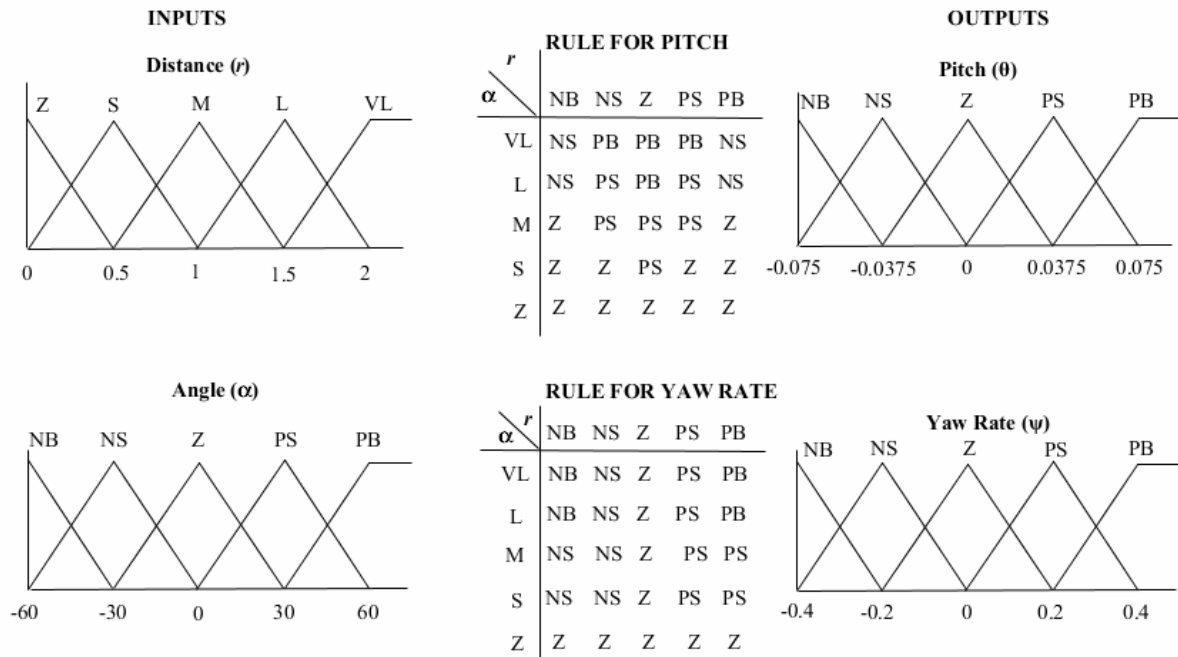


Figure 6. Fuzzy Logic Controller

Subsystem position and orientation calculation is used in order to determine the position and orientation of the AR.Drone using forward speed ( $v_x$ ), sideward speed ( $v_y$ ), yaw ( $\psi$ ) and time stamp ( $t$ ) data. Those calculations can be solved using the algorithms below.

```

if RESET = TRUE then
    Yawreset = Yawi;
    x = 0;
    y = 0;

else
    Yawreset = Yawreset;
    dx=(Timei - Timei-1) · Vx;
    dy=(Timei - Timei-1) · Vy;

end if
    Yawvalue = Yawi - Yawreset;
    xi = xi-1+dx · cos(Yawvalue)+dy · cos(Yawvalue+90);
    yi = yi-1+dx · sin(Yawvalue)+dy · sin(Yawvalue+90);
    
```

Where,  $i$  is the number of sample. When RESET is done, the position and orientation of the AR.Drone is set to (0, 0, 0). In order to reset the orientation of the AR.Drone, Yawreset variable, which will reduce the amount of yaw at that time (Yaw<sub>i</sub>) so that its value (Yaw<sub>value</sub>) becomes 0 is used.

Roll compensation is a subsystem that compensates for the sideward speed ( $v_y$ ) during trajectory tracking. This compensation is achieved simply by giving the AR.Drone an input value called roll, which varies from 0.3 to -0.3 for a sideward speed of -0.6 to 0.6 m/s proportionally.

In order to test the performance of the fuzzy logic controller in completing a trajectory-tracking task, there are a few trajectory references to be experimented with. The experiments

are carried out in the Industrial Automation Laboratory Building TC.3 Electrical Engineering University of Surabaya with room dimensions of approximately 4x4 metres. The testing procedure is as follows:

- Generate reference trajectory in its various shapes.
- The data trajectory, which has been generated, is called through a program as the setpoint that is to be followed by the AR.Drone.
- AR.Drone is flown from its initial position and orientation using hover mode.
- After the altitude is stable at 1 metre, switch to auto by turning hover mode off. AR.Drone will follow a given trajectory using the fuzzy logic controller.
- AR.Drone will be set back to hover mode at the end of the trajectory. In order to ease the monitoring, a reference trajectory graph and real time experiment is made at the front panel of LabVIEW.
- After the experiment is complete, AR.Drone is landed.

Figure 7 and 8 show the real time experiment and the front panel of LabVIEW.



Figure 7. Real Time Experiment

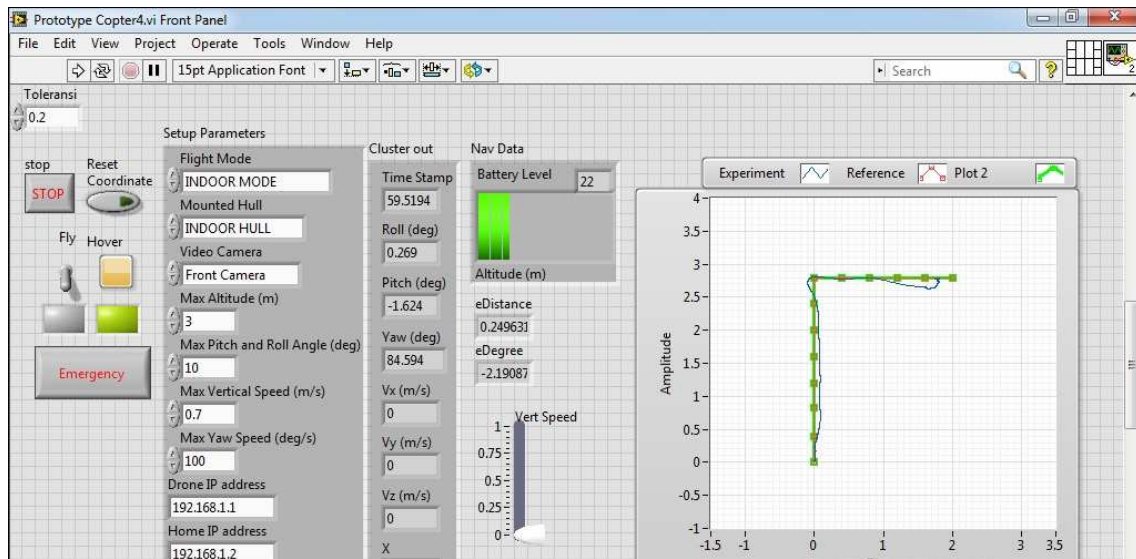


Figure 8. Front Panel

### 3. Results and Analysis

The results of the fuzzy logic controller for a several reference trajectories are shown in this section. The first testing is conducted in a straight reference trajectory. The AR.Drone is tested with various initial positions before being flown autonomously with the designed controller. Furthermore, the AR.Drone is tested using a trajectory that has a perpendicular turn to the right. As before with the straight trajectory, the drone is tested from various initial positions to see the capabilities of the drone in following a given trajectory. Figure 9 shows the result on a straight reference trajectory and on a trajectory with a turn.

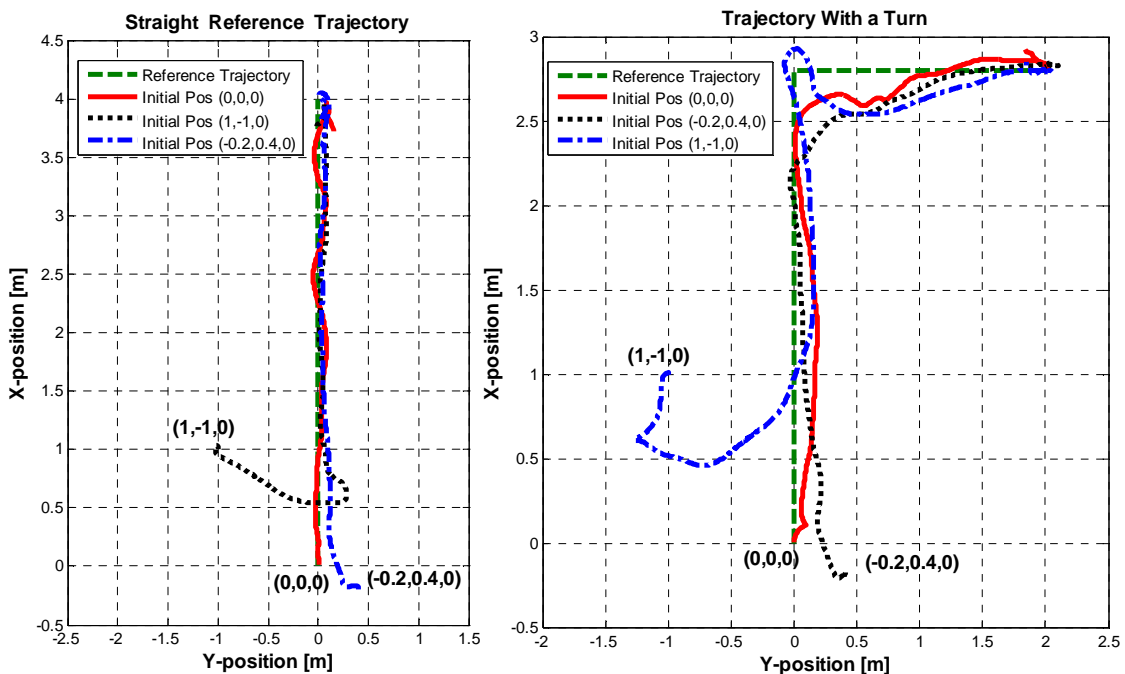


Figure 9. The Results of AR.Drone with a straight trajectory and a trajectory with a turn



According to the results above, the AR.Drone is capable of following the straight trajectory well. At the initial position  $(1, -1, 0)$ , the angle between the AR.Drone and the reference trajectory is very large so that when the AR.Drone is heading towards its trajectory, a relatively small overshoots occurred. When the AR.Drone is given the same initial position and orientation as the initial reference, naturally the AR.Drone completed its task. Likewise, when the initial position and orientation of the AR.Drone has a relatively small angle compared to the reference trajectory (in this case  $(-0.2, 0.4, 0)$ , it is easy for the AR.Drone to follow the trajectory.

It is shown that generally the AR.Drone has shortcomings in following a given trajectory with a turn. The position of the AR.Drone appeared to be lagging when compared to its reference. Nevertheless, from various initial positions, the AR.Drone has shown its capability in following a given trajectory.

In the next experiment the trajectory is changed into a square. Naturally, various initial positions are used in order to see the drone's response. The last experiment is a curved trajectory with the shape of a letter 'G'. The reference of this trajectory is obtained by recording the navigation data of the AR.Drone which was manually flown with a program from a ground station which gives the pair of pitch and yaw rate sequentially. Figure 10 below shows the result of the experiment of the said curved trajectory. The results are shown in Figure 10.

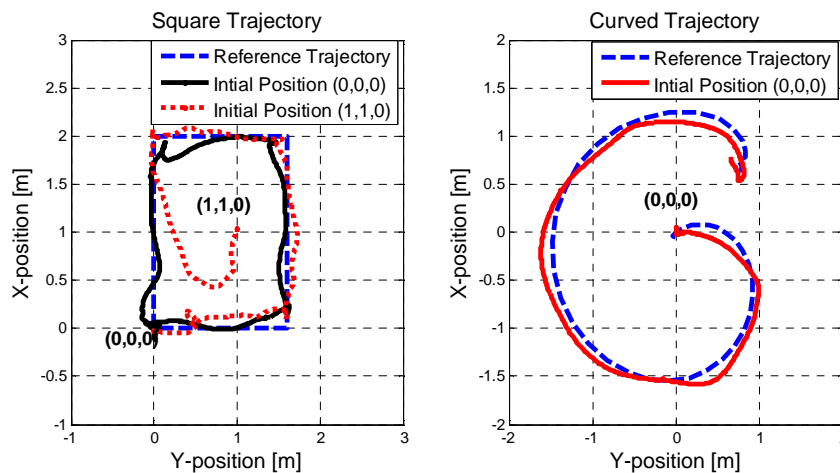


Figure 10. The results of AR Drone with a square's trajectory and a curved's trajectory

It is shown once again that the same shortcomings occurred in each turn. However, when the trajectory is straight, the AR.Drone is able to follow it well. The AR.Drone is also capable of following the trajectory even though its initial position is in the centre of the square trajectory. Generally the AR.Drone is able to follow a curved trajectory well even though there are still some errors in the position of  $x$  and  $y$  which are relatively small.

#### 4. Conclusion

In general, The Fuzzy Logic Controller can be used to solve the trajectory-tracking problem in AR.Drone. From the experiments that have been carried out, the drone is shown to be capable of following a given trajectory with various initial positions. However, there are still some shortcomings in this research, which include the lagging of the drone when following a turn in a trajectory, especially the sharp ones.

#### References

- [1] Krajnik T, Vonasek V, Fiser D, Faigl J. *AR-Drone as a Platform for Robotic Research and Education*. Research and Education in Robotics :EUROBOT. Heidelberg. 2011.
- [2] Mary C, Totu LC, Koldbaek S K. *Modeling and Control of Autonomous Quad-Rotor*. Dept of Electronic Systems University of Aalborg Denmark. Project Report. 2010.

- 
- [3] Jacco vand der Spek, Mario V. *AR.Drone Autonomous Control and Position Determination*. Bachelor Thesis. TU-Delft. 2012.
  - [4] Pierre-Jean B, Francois C, David V, Nicolas P. *The Navigation and Control Technology Inside the AR Drone Micro UAV*. 18th IFAC World Congress, Milano Italy. 2011.
  - [5] <http://ardrone2.parrot.com> accessed on 11 August 2014.
  - [6] Stephane P, Nicolas B. *AR.Drone Developer Guide*. Parrot. SDK 1.6. 2011.
  - [7] Gerrard M. *Modeling and Control of the Parrot AR.Drone*. SEIT UNSW Canberra. Final Project Report. 2012.
  - [8] Michael M. The AR Drone LabVIEW Toolkit: A Software Framework for the Control of Low Cost Quadrotor Aerial Robots. *Master of Science Thesis*. TUFTS University. 2012.
  - [9] Sun Y. Modeling, Identification and Control of a Quadrotor Drone Using Low-Resolution Sensing. *Master of Science Thesis*. University of Illinois at Urbana-Champaign. 2012.
  - [10] Guilherme V R, Manuel G O, Francisco R R. *Nonlinear  $H^\infty$  Controller for the Quad-Rotor Helicopter with Input Coupling*. 18<sup>th</sup> IFAC World Congress, Milano Italy. 2011; reprint.
  - [11] <https://ardrone1abviewtoolkit.wordpress.com/>

Scopus<sup>®</sup>  
indexed

Q3

Journal of  
Advanced  
Engineering

ISI 2019  
0.21

ISI 2020  
0.66

ISI 2021  
1.7

ISSN 1693-6930

Vol. 19 No. 2, April 2021

# TELKOMNIKA

Telecommunication Computing  
Electronics and Control

<http://journal.uad.ac.id/index.php/TELKOMNIKA>

TELKOMNIKA

Vol. 19 No. 2, April 2021

UAD  
Universitas  
Ahmad Dahlan

iaes  
Institute of Advanced Engineering and Science

Home > About the Journal > **Editorial Team**

## Editorial Team

### Editor-in-Chief

[Assoc. Prof. Dr. Tole Sutikno](#), Universitas Ahmad Dahlan, Indonesia

### Area Editor for Electrical Power Engineering

[Assoc. Prof. Dr. Ahmet Teke](#), Cukurova University, Turkey

### Area Editor for Electronics Engineering

[Prof. Ing. Mario Versaci](#), Università degli Studi di Reggio Calabria, Italy

### Area Editor for Power Electronics and Drives

[Prof. Dr. Yang Han](#), University of Electronic Science and Technology of China, China

### Area Editor for Instrumentation and Control Engineering

[Prof. Dr. Paolo Visconti](#), University of Salento, Italy

### Area Editor for Signal, Image and Video Processing

[Prof. Dr. Nidhal Carla Bouaynaya](#), Rowan University, United States

### Area Editor for Communication System Engineering

[Prof. Dr. Zahriahda Zakaria](#), Universiti Teknikal Malaysia Melaka, Malaysia

### Area Editor for Computer Network and System Engineering

[Assoc. Prof. Dr. Muhammad Nadzir Marsono](#), Universiti Teknologi Malaysia, Malaysia

### Area Editor for Computer Science and Information System

[Assoc. Prof. Dr. Wanquan Liu](#), Curtin University of Technology, Australia

### Area Editor for Machine Learning, AI and Soft Computing

[Prof. Dr. Luis Paulo Reis](#), Universidade do Porto, Portugal

### Area Editor for Internet of Things

[Assoc. Prof. Dr. Chau Yuen](#), Singapore University of Technology and Design, Singapore

### Associate Editors

[Prof. Viranjay Mohan Srivastava](#), University of KwaZulu-Natal, South Africa  
[Prof. Dr. Media Anugerah Ayu](#), Sampoerna University, Indonesia  
[Prof. Dr. Simon X. Yang](#), University of Guelph, Canada  
[Prof. Dr. Ahmad Saudi Samosir](#), Lampung University, Indonesia  
[Prof. Dr. Alex Pappachen James](#), Indian Institute of Information Technology and Management-Kerala, India  
[Prof. Dr. Antonios Gasteratos](#), Democritus University of Thrace, Greece  
[Prof. Dr. Badrul Hisham Ahmad](#), Universiti Teknikal Malaysia Melaka, Malaysia  
[Prof. Dr. Chi-Hua Chen](#), Fuzhou University, China  
[Prof. Dr. Emilio Jimenez-Macias](#), University of La Rioja, Spain  
[Prof. Dr. Francis C. M. Lau](#), Hong Kong Polytechnic University, Hong Kong  
[Prof. Franco Frattolillo, Ph.D.](#), University of Sannio, Italy  
[Prof. Dr. George A. Papakostas](#), International Hellenic University, Greece  
[Prof. Dr. Huchang Liao](#), Sichuan University, China  
[Prof. Longquan Yong](#), Shaanxi University of Technology, China  
[Prof. Dr. Mahmoud Moghavvemi](#), University of Malaya, Malaysia  
[Prof. Ing. Mario Versaci](#), Università degli Studi di Reggio Calabria, Italy  
[Prof. Dr. Melchior Pierre](#), University of Bordeaux, France  
[Prof. Dr. Pascal Lorenz](#), University of Haute Alsace, France  
[Prof. Dr. Qiang Yang](#), Zhejiang University, China  
[Prof. Dr. Sanjay Misra](#), Covenant University, Nigeria  
[Prof. Dr. Surinder Singh](#), SLIET Longowal, India  
[Prof. Dr. Teddy Surya Gunawan](#), International Islamic University of Malaysia, Malaysia  
[Prof. Dr. Zhenyu Zhou](#), North China Electric Power University, China  
[Prof. Dr. Zita Vale](#), Instituto Politécnico do Porto, Portugal  
[Dr. Kennedy O. Okokpuje](#), Covenant University, Nigeria  
[Assoc. Prof. Dr. D. Jude Hemanth](#), Karunya University, India  
[Assoc. Prof. Dr. Hamed Mojjallali](#), The University of Gullan, Iran, Islamic Republic of  
[Assoc. Prof. Dr. Imran Sarwar Bajwa](#), Islamia University, Pakistan  
[Assoc. Prof. Dr. Jumril Yunas](#), Universiti Kebangsaan Malaysia, Malaysia  
[Assoc. Prof. Dr. Peng Zhang](#), University of Connecticut, United States  
[Assoc. Prof. Dr. Shahrin Md Ayob](#), Universiti Teknologi Malaysia, Malaysia  
[Asst. Prof. Dr. Andrea Francesco Morabito](#), University of Reggio Calabria, Italy  
[Asst. Prof. Dr. Domenico Ciuonzo](#), University of Naples Federico II, Italy  
[Dr. Abdullah M. Ilyasu](#), Tokyo Institute of Technology, Japan  
[Dr. Adamu I. Abubakar](#), International Islamic University Malaysia, Malaysia  
[Dr. Anh-Huy Phan](#), Skolkovo Institute of Science and Technology (Skoltech), Russian Federation  
[Dr. Arafat Al-Dweik](#), Khalifa University, United Arab Emirates  
[Dr. Arcangelo Castiglione](#), University of Salerno, Italy  
[Dr. Arianna Mencattini](#), University of Rome "Tor Vergata", Italy  
[Dr. Athanasios Kakarountas](#), University of Thessaly, Greece  
[Dr. Aniello Castiglione](#), University of Naples Parthenope, Italy  
[Dr. Griengrai Rajchakit](#), Maejo University, Thailand  
[Dr. Javed Iqbal](#), Sarhad University of Science and Information Technology, Pakistan  
[Dr. Khader Shameer](#), Mount Sinai Health System, United States  
[Dr. Lai Khin Wee](#), Universiti Malaya, Malaysia  
[Asst. Prof. Dr. Makram A. Fakhri](#), University of Technology, Iraq  
[Mark S. Hooper](#), IEEE Consultants' Network of Silicon Valley, United States  
[Dr. Paolo Crippa](#), Universita'Politecnica delle Marche, Italy  
[Dr. Oammer Hussain Abbasi](#), University of Glasgow, United Kingdom  
[Dr. Saleem Abdullah](#), Abdul Wali Khan University Mardan, Pakistan

#### USER

Username   
 Password   
 Remember me

#### TEMPLATE



#### ONLINE SUBMISSION



#### QUICK LINKS

- Author Guideline
- Editorial Boards
- Reviewers
- **Online Submission**
- Abstracting and Indexing
- Scopus: Add missing document
- Publication Ethics
- Visitor Statistics
- Contact Us

#### JOURNAL CONTENT

Search   
 Search Scope  
 All

#### Browse

- By Issue
- By Author
- By Title
- Other Journals

[Dr. Santhanakrishnan V. R. Anand](#), New York Institute of Technology, United States  
[Dr. Sudhanshu Tyagi](#), Thapar Institute of Engineering and Technology, India  
[Dr. Winai Jaikla](#), King Mongkut's Institute of Technology Ladkrabang, Thailand

**TELKOMNIKA Telecommunication, Computing, Electronics and Control**

ISSN: 1693-6930, e-ISSN: 2302-9293

Universitas Ahmad Dahlan, 4th Campus

Jl. Ringroad Selatan, Kragilan, Tamanan, Banguntapan, Bantul, Yogyakarta, Indonesia 55191

Phone: +62 (274) 563515, 511830, 379418, 371120

Fax: +62 274 564604

**02966552**

[View TELKOMNIKA Stats](#)

HOME ABOUT LOGIN REGISTER SEARCH CURRENT ARCHIVES ANNOUNCEMENTS

Home > Archives > Vol 12, No 4

## Vol 12, No 4

December 2014

DOI: <http://dx.doi.org/10.12928/telkomnika.v12i4>

### Table of Contents

Fortifying Big Data infrastructures to Face Security and Privacy Issues <i>Tole Sutikno, Deris Stiawan, Imam Much Ibnu Subroto</i>	<a href="#">PDF</a>	751-752
Spectrum Comparative Study of Commutation Failure and Short-Circuit Fault in UHVDC Transmission System <i>Shi-long Chen, Jun-xiang Rong, Gui-hong Bi, Xing-wang Li, Rui-ruai Cao</i>	<a href="#">PDF</a>	753-762
Improving the Dielectric Properties of High Density Polyethylene by Incorporating Clay-Nanofiller <i>Ahmed Sayed Haiba, Ossama El-sayed Gouda, Sohair Fakhry Mahmoud, Ahmed Aboud El-gendy</i>	<a href="#">PDF</a>	763-772
Cost Forecasting Model of Transmission Project based on the PSO-BP Method <i>Yan Lu, Dongxiao Niu, Bingjie Li, Min Yu</i>	<a href="#">PDF</a>	773-778
Non-Planar MOSFET Modeling with Analytical Approach <i>Munawar A Riyadi, Darjat Darjat, Teguh Prakoso, Jatmiko E. Suseno</i>	<a href="#">PDF</a>	779-786
Pre-Timed and Coordinated Traffic Controller Systems Based on AVR Microcontroller <i>Freddy Kurniawan, Denny Dermawan, Okto Dinaryanto, Mardiana Irawati</i>	<a href="#">PDF</a>	787-794
Cooperative Avoidance Control-based Interval Fuzzy Kohonen Networks Algorithm in Simple Swarm Robots <i>Siti Nurmaini, Siti Zaiton, Ricy Firnando</i>	<a href="#">PDF</a>	795-810
Resolution Improvement in Fabry-Perot Displacement Sensor Based on Fringe Counting Method <i>Nur Izzati Ismail, Nor Hafizah Ngajikin, Nor Fadzlina Mohd Zaman, Maisarah Awang, Asrul Izam Azmi, Nik Noordini Nik Abd. Malik, Norazan Mohd Kassim</i>	<a href="#">PDF</a>	811-818
Trajectory Tracking of AR.Drone Quadrotor Using Fuzzy Logic Controller <i>Agung Prayitno, Veronica Indrawati, Gabriel Utomo</i>	<a href="#">PDF</a>	819-828
System Identification and LMI Based Robust PID Control of a Two-Link Flexible Manipulator <i>M. Khairudin, Z. Mohamed, A.R. Husain</i>	<a href="#">PDF</a>	829-838
Research on Image Splicing and Fusion Processing Algorithm in Large Visual Field <i>Wu Jie, Zuren Feng, Xiaoru Song</i>	<a href="#">PDF</a>	839-846
Diagnostic Study Based on Wavelet Packet Entropy and Wear Loss of Support Vector Machine <i>Yunjie Xu, Shudong Xiu</i>	<a href="#">PDF</a>	847-854
Image Deblurring via an Adaptive Dictionary Learning Strategy <i>Lei Li, Ruiting Zhang, Jiangmin Kan, Wenbin Li</i>	<a href="#">PDF</a>	855-864
Large Crowd Count Based on Improved SURF Algorithm <i>Haining Zhang, Huanbo Gao</i>	<a href="#">PDF</a>	865-874
Image Fuzzy Enhancement Based on Self-Adaptive Bee Colony Algorithm <i>Meng Lei, Yao Fan</i>	<a href="#">PDF</a>	875-882
Multi Facial Blurring using Improved Henon Map <i>Saparudin Saparudin, Ghazali Sulong, Muhammed Ahmed Saleh</i>	<a href="#">PDF</a>	883-889
Prediction and Realization of DO in Sewage Treatment Based on Machine Vision and BP Neural Network <i>Liu Liping, Sunjin Sheng, Yin Jing-tao, Liang Na</i>	<a href="#">PDF</a>	890-896
Sparsity Properties of Compressive Video Sampling Generated by Coefficient Thresholding <i>Ida Wahidah Hamzah, Tati Latifah R. Mengko, Andriyan B. Suksmono, Hendrawan Hendrawan</i>	<a href="#">PDF</a>	897-904

#### USER

Username   
 Password   
 Remember me  
[Login](#)

#### TEMPLATE



#### ONLINE SUBMISSION



#### QUICK LINKS

- Author Guideline
- Editorial Boards
- Reviewers
- **Online Submission**
- Abstracting and Indexing
- Scopus: Add missing document
- Publication Ethics
- Visitor Statistics
- Contact Us

#### JOURNAL CONTENT

Search   
 Search Scope  
 All   
[Search](#)

#### Browse

- By Issue
- By Author
- By Title
- Other Journals

Feature Selection Method Based on Improved Document Frequency <i>Wei Zheng, Guohe Feng</i>	<a href="#">PDF</a> 905-910
High Recognition Ratio Image Processing Algorithm of Micro Electrical Components in Optical Microscope <i>Wu Jie, Zuren Feng, Lei Wang</i>	<a href="#">PDF</a> 911-920
Face Recognition Using Invariance with a Single Training Sample <i>Qian Tian</i>	<a href="#">PDF</a> 921-932
Two-Dimensional Imaging Algorithm Based on Linear Prognosis for Space Target in Bistatic ISAR System <i>Xueping Lu, Shapu Ren</i>	<a href="#">PDF</a> 933-941
Wireless Sensor Based Hybrid Architecture for Vehicular Ad hoc Networks <i>Kashif Naseer Qureshi, Abdul Hanan Abdullah, Raja Waseem Anwar</i>	<a href="#">PDF</a> 942-949
Unambiguous Acquisition for Galileo E1 OS Signal Based on Delay-And-Multiply <i>Deng Zhongliang, Xi Yue, Jiao Jichao, Yin Lu</i>	<a href="#">PDF</a> 950-962
Low Energy Adaptive Clustering Hierarchy Routing Protocol for Wireless Sensor Network <i>Veronica Windha Mahyastuty, A. Adya Pramudita</i>	<a href="#">PDF</a> 963-968
Trusted Node-Based Algorithm to Secure Home Agent NATed IPv4 Network from IPv6 Routing Header Attacks <i>Mohamed Shenify</i>	<a href="#">PDF</a> 969-976
Multi-objective Optimization Based on Improved Differential Evolution Algorithm <i>Shuqiang Wang, Jianli Ma</i>	<a href="#">PDF</a> 977-984
Information Support Technology of Ship Survey Based on Case-based Reasoning <i>Jiyin Cao, Shidong Fan, Wen Lu, Haiyun Liu</i>	<a href="#">PDF</a> 985-996
Application of Chaotic Particle Swarm Optimization in Wavelet Neural Network <i>Cuijie Zhao, Guozhen Wang</i>	<a href="#">PDF</a> 997-1004
A New Algorithm for Detecting Local Community Based on Random Walk <i>Yueping Li, Weikun Zheng</i>	<a href="#">PDF</a> 1005-1016
An Improved Entity Similarity Measurement Method <i>LV Gang, Chen Sheng-bing</i>	<a href="#">PDF</a> 1017-1022
Complex Optimization problems Using Highly Efficient Particle Swarm Optimizer <i>Kaiyou Lei, Changjiu Pu</i>	<a href="#">PDF</a> 1023-1030
The Development of Windows Communication Foundation Application as Middleware for Banyumas Tourism and Culinary Information System <i>Yuli Purwati, Fandy Setyo Utomo</i>	<a href="#">PDF</a> 1031-1038
Optimization Research of the OLAP Query Technology Based on P2P <i>Chunfeng Wang</i>	<a href="#">PDF</a> 1039-1044
Process Improvement of LSA for Semantic Relatedness Computing <i>Wujian Yang, Lianyue Lin</i>	<a href="#">PDF</a> 1045-1052
A Reliable Web Services Selection Method for Concurrent Requests <i>Guiming Lu, Yan Hai, Yaoyao Sun</i>	<a href="#">PDF</a> 1053-1063
Dynamic DEMATEL Group Decision Approach Based on Intuitionistic Fuzzy Number <i>Hui Xie, Wanchun Duan, Yonghe Sun, Yuanwei Du</i>	<a href="#">PDF</a> 1064-1072
An Algorithm Based on Wavelet Neural Network for Garment Size Selection <i>Luo Ronglei, He Wenjie, Li Chengyi</i>	<a href="#">PDF</a> 1073-1078
OWLS-CSM: A Service Profile Based Similarity Framework for Web Service Discovery <i>Naji Hasan.A.H, Gao Shu</i>	<a href="#">PDF</a> 1079-1087
A Novel Intrusion Detection Approach using Multi-Kernel Functions <i>Lijiao Pan, Weijian Jin, Jun Wu</i>	<a href="#">PDF</a> 1088-1095
Intelligent Interface for Knowledge Based System <i>Nyoman Bogi Aditya Karna, Iping Supriana, Ulfa Maulidevi</i>	<a href="#">PDF</a> 1096-1104
A Model of Vertical Crawler Based on Hidden Markov Chain <i>Ye Hu, Jun Tu, Wangyu Tong</i>	<a href="#">PDF</a> 1105-1112

Development of Wireless Electric Field Mill for Atmospheric Electric Field Observation

[PDF](#)

*Muhammad Abu Bakar Sidik, Hamizah Shahroom, Zolkafle Buntat, Yanuar Zulardiansyah Arief, Zainuddin Nawawi, Muhammad Irfan Jambak*

1113-1122

Image Tamper Detection and Recovery by Intersecting Signatures

[PDF](#)

*Chun-Hung Chen, Yuan-Liang Tang, Wen-Shyong Hsieh, Min-Shiang Hwang*

1123-1131

Review of Local Descriptor in RGB-D Object Recognition

[PDF](#)

*Ema Rachmawati, Iping Supriana Suwardi, Masayu Leylia Khodra*

1132-1141

A Review of Parabolic Dish-Stirling Engine System Based on Concentrating Solar Power

[PDF](#)

*Liaw Geok Pheng, Rosnani Affandi, Mohd Ruddin Ab Ghani, Chin Kim Gan, Zanariah Jano, Tole Sutikno*

1142-1152

**TELKOMNIKA Telecommunication, Computing, Electronics and Control**

ISSN: 1693-6930, e-ISSN: 2302-9293

Universitas Ahmad Dahlan, 4th Campus

Jl. Ringroad Selatan, Kragilan, Tamanan, Banguntapan, Bantul, Yogyakarta, Indonesia 55191

Phone: +62 (274) 563515, 511830, 379418, 371120

Fax: +62 274 564604

**02966591**

[View TELKOMNIKA Stats](#)





Ads by Google

[Stop seeing this ad](#)
[Why this ad? !\[\]\(faf942dc3e59ce8eb64b4ac481eca7e0\_img.jpg\)](#)

## Telkomnika

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
Indonesia  Universities and research institutions in Indonesia	Engineering Electrical and Electronic Engineering	Institute of Advanced Engineering and Science (IAES)	<b>23</b>

PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	16936930, 2087278X	2011-2020	<a href="#">Homepage</a> <a href="#">How to publish in this journal</a> <a href="mailto:telkomnika@ee.uad.ac.id">telkomnika@ee.uad.ac.id</a>

### SCOPE






TELKOMNIKA (Telecommunication Computing Electronics and Control) is a peer reviewed International Journal in English published four issues per year (March, June, September and December). The aim of TELKOMNIKA is to publish high-quality articles dedicated to all aspects of the latest outstanding developments in the field of electrical engineering. Its scope encompasses the engineering of signal processing, electrical (power), electronics, instrumentation & control, telecommunication, computing and informatics which covers, but not limited to, the following scope: Signal Processing[...] Electronics[...] Electrical[...] Telecommunication[...] Instrumentation & Control[...] Computing and Informatics[...]

 Join the conversation about this journal

 Quartiles  


### FIND SIMILAR JOURNALS

options 

1 <b>Indonesian Journal of Electrical Engineering and IDN</b>  <b>48%</b> similarity	2 <b>Indonesian Journal of Electrical Engineering and IDN</b>  <b>46%</b> similarity	3 <b>Bulletin of Electrical Engineering and Informatics IDN</b>  <b>44%</b> similarity	4 <b>International Journal of Electrical and Computer IDN</b>  <b>41%</b> similarity	5 <b>Journal of Telecommunication, MYS</b>  <b>22%</b> similarity
--	--	--	--	---



**Telkonnika**

Q3  
Electrical and Electronic Engineering  
Q3 quartile

SJR 2020  
0.26

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" data-bbox="195 430 295 445">
```

**SCImago Graphica**

Explore, visually communicate and make sense of data with our new **free tool**.

Get it



Metrics based on Scopus® data as of April 2021

J **jancokers** 4 weeks ago

Why is this journal still indexed by Scopus? even though it still contains unqualified journals

reply

SCImago Team



**Melanie Ortiz** 4 weeks ago

Dear Jancokers, thank you very much for your comment. We suggest you consult the Scopus database directly. Keep in mind that the SJR is a static image (the update is made one time per year) of a database (Scopus) which is changing every day.  
Best Regards, SCImago Team

I **Indonesia Author** 4 months ago

Very bad Journal. The editor is very low response. Every email question is never answered by the editor. I really strongly don't recommend submitting on Telkonnika.

reply

SCImago Team



**Melanie Ortiz** 4 months ago

Dear Sir/Madam, thanks for your participation! Best Regards, SCImago Team

A **ali** 1 year ago

I am really sad because I have been trying to reach this journal in order to assist me in the publication payment process. but unfortunately no response. I have sent them many emails, No feedback.

reply



**Melanie Ortiz** 1 year ago

SCImago Team

Dear Ali,  
thank you for contacting us.  
Unfortunately, we cannot help you with your request.  
Best Regards, SCImago Team

**W Wahiba** 1 year ago

Hello

I have found two journals with the same name, one is from UEA and the second one is from Indonesia is it the same journal, can you send their websites.

reply



**Melanie Ortiz** 1 year ago

SCImago Team

Dear Wahiba,  
Thank you for contacting us. Could you please provide us more details about these journals?  
Best Regards, SCImago Team

**W Wisnu Ananta Kusuma** 1 year ago

Hello,

Why my all paper published in this journal (telkomnika) before 2017 did not indexed again in scopus?

reply



**Melanie Ortiz** 1 year ago

SCImago Team

Dear Wisnu,  
thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you contact Scopus support: [https://service.elsevier.com/app/answers/detail/a\\_id/14883/kw/scimago/supporthub/scopus/](https://service.elsevier.com/app/answers/detail/a_id/14883/kw/scimago/supporthub/scopus/)  
Best Regards, SCImago Team



**abdelkbir** 2 years ago

what is the Impact Factor for Telkomnika

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear Abdelkbir, thank you very much for your comment.  
SCImago Journal and Country Rank uses Scopus data, our impact indicator is the SJR.  
Check out our web to localize the journal. We suggest you to consult the Journal Citation Report for other indicators (like Impact Factor) with a Web of Science data source. Best Regards, SCImago Team

**S Siddhant Karmacharya** 2 years ago

Hi, what is the word limit of this journal ?

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear user,  
thank you for contacting us.  
Sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.  
Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage or contact the journal's editorial staff, so they could inform you more deeply.  
You can see the updated journal's information just above .  
Best Regards, SCImago Team



**mulyadi rusli** 2 years ago

pardon me, can I know how long the reviewing process?

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear user,

thank you for contacting us.

Sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage or contact the journal's editorial staff, so they could inform you more deeply.

Best Regards, SCImago Team

**M Muthna** 3 years ago

I want answer, why Journal website appear error? how can check my research status? please inform?

reply

**M muthna** 3 years ago

why journal website close? appear error page 404.

reply

**R Rajni Bhalla** 3 years ago

Hello sir,

My paper suppose to publish in October. But still full text is not coming for this paper.As i have sent word file through mail also and uploaded on website also.Kindly let me know to whom should i contact.I have already sent mail to editor number of times.Kindly do the needful.

Thanking you

Regards

Rajni

reply

**M Mohammed Al-obaidi** 3 years ago

Hi, can I know how long the reviewing process?



**Elena Corera** 3 years ago

SCImago Team

Dear Rajni,

thank you very much for your comment. Unfortunately, we cannot help you with your request, we suggest you contact journal's editorial staff so they could inform you more deeply. You can find contact information in SJR website <https://www.scimagojr.com>

Anyway, if there is any user who has already published in the journal, maybe could help us with your request.

Best Regards,  
SCImago Team

**S shahd** 4 years ago

I want to Know how I can get the Impact Factor of any Journal

reply



**Elena Corera** 4 years ago

SCImago Team

Dear Ahahd,

thank you very much for your request. You can consult that information in SJR website.

Best Regards,


SCImago Team

**Leave a comment**

Name

Email

(will not be published)

**Submit**

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

---

Developed by:




Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®





# Source details

## Telkomnika (Telecommunication Computing Electronics and Control)

Scopus coverage years: from 2011 to Present

Publisher: Universitas Ahmad Dahlan

ISSN: 1693-6930 E-ISSN: 2087-278X

Subject area: Engineering: Electrical and Electronic Engineering

Source type: Journal

CiteScore 2020

2.2



SJR 2020

0.258



SNIP 2020

0.746



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

### i Improved CiteScore methodology



CiteScore 2020 counts the citations received in 2017-2020 to articles, reviews, conference papers, book chapters and data papers published in 2017-2020, and divides this by the number of publications published in 2017-2020. [Learn more >](#)

CiteScore 2020 ▼

$$2.2 = \frac{2,987 \text{ Citations 2017 - 2020}}{1,360 \text{ Documents 2017 - 2020}}$$

Calculated on 05 May, 2021

CiteScoreTracker 2021 ⓘ

$$2.8 = \frac{3,927 \text{ Citations to date}}{1,385 \text{ Documents to date}}$$

Last updated on 06 March, 2022 • Updated monthly

### CiteScore rank 2020 ⓘ

Category	Rank	Percentile
Engineering		
Electrical and Electronic Engineering	#373/693	46th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site ↗](#)

## About Scopus

- [What is Scopus](#)
- [Content coverage](#)
- [Scopus blog](#)
- [Scopus API](#)
- [Privacy matters](#)

## Language

- [日本語に切り替える](#)
- [切换到简体中文](#)
- [切换到繁體中文](#)
- [Русский язык](#)

## Customer Service

- [Help](#)
- [Tutorials](#)
- [Contact us](#)

---

## ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies.

