

Contents lists available at ScienceDirect

Journal of King Saud University – Computer and Information Sciences

journal homepage: www.sciencedirect.com



An android based course attendance system using face recognition

Dwi Sunaryono a, Joko Siswantoro b,*, Radityo Anggoro a



^b Department of Informatics Engineering, Universitas Surabaya Jl. Kali Rungkut, Surabaya 60293, Indonesia



ARTICLE INFO

Article history:
Received 11 September 2018
Revised 28 November 2018
Accepted 12 January 2019
Available online 18 January 2019

Keywords: Course attendance system Face recognition Android based Smartphone

ABSTRACT

Student attendance system is needed to measure student participation in a course. Several automated attendance systems have been proposed based on biometric recognition, barcode, QR code, and near field communication mobile device. However, the previous systems are inefficient in term of processing time and low in accuracy. This paper aims to propose an Android based course attendance system using face recognition. To ensure the student attend in the course, QR code contained the course information was generated and displayed at the front of classroom. The student only needed to capture his/her face image and displayed QR code using his/her smartphone. The image was then sent to server for attendance process. The experimental result shows that the proposed attendance system achieved face recognition accuracy of 97.29 by using linear discriminant analysis and only needed 0.000096s to recognize a face image in the server.

© 2019 The Authors. Production and hosting by Elsevier B.V. on behalf of King Saud University. This is an open access article under the CC BY-NC-ND license (http://creativecommons.org/licenses/by-nc-nd/4.0/).

1. Introduction

Student attendance is an important factor for students to succeed in a course. In a certain university, student attendance in a course is also used as one of requirements for student to take the exam (Islam et al., 2017). A conventional approach to record student attendance is performed by asking every student to sign on an attendance list that passes through all students during the beginning of lectures. However, this approach is inefficient in term of time and can potentially lead to a fraud especially in a large class, where a student can sign on the attendance list for other students who are not present in the class. To avoid the happening of fraud, sometimes the lecturer calls out the names of students who have signed on the attendance list one by one. This method will take the lecture time and will have an impact on the effectiveness of lecture (Mohamed and Raghu, 2012). A modern approach to record attendance is by using automated attendance system. Several automated attendance system have been proposed by employ-

E-mail addresses: dwis@if.its.ac.id (D. Sunaryono), joko_siswantoro@staff.ubaya. ac.id (J. Siswantoro), onggo@if.its.ac.id (R. Anggoro).

Peer review under responsibility of King Saud University.



ELSEVIER

Production and hosting by Elsevier

ing biometric recognition, such as fingerprint recognition (Mohamed and Raghu, 2012; Rao and Satoa, 2013; Soewito et al., 2015; Zainal et al., 2016; Zainal et al., 2014), face recognition (Chintalapati and Raghunadh, 2013; Fuzail et al., 2014; Mehta and Tomar, 2016; Raghuwanshi and Swami, 2017; Sayeed et al., 2017; Wagh et al., 2015; Wati Mohamad Yusof et al., 2018) and palm vein recognition (bayoumi et al., 2015) to recognize students who are present and record their attendance. The other proposed attendance systems used barcode (Noor et al., 2015), QR code (Rahni et al., 2015), RFID (Arulogun et al., 2013; Bhalla et al., 2013; Hussain et al., 2014; Rjeib et al., 2018) and near field communication (NFC) mobile device (Mohandes, 2017) to obtain student ID for attendance process. Some attendance systems were developed in portable device (Mohamed and Raghu, 2012; Zainal et al., 2016, 2014) and smartphone (Islam, et al., 2017; Mohandes, 2017; Noor et al., 2015; Rahni et al., 2015; Soewito et al., 2015).

Rao and Satoa (2013) have proposed an employee attendance management system using fingerprint recognition. Every check in and check out times, employees needed to scan their fingerprint to record attendance. Minutiae-based matching combined with alignment-based greedy matching was used to recognize scanned fingerprint in the proposed attendance system. Although the authors reported that the proposed system is easy to use and low cost, the proposed system is not appropriate for course attendance system since if there are a large number of classes in the same time then the system requires a large number of fingerprint recording devices. Moreover, if there are a large number of stu-

^{*} Corresponding author.

dents in a course, then the system will cause a long and time consuming queue. Rao and Satoa (2013), Zainal et al. (2016, 2014) have proposed a portable device for student attendance system based on fingerprint recognition. The proposed systems asked student to scan his/her fingerprint to the device for attendance process. The attendance data was only stored on the device. The device was not directly connected to the server, as consequent the lecturer needs to back up the data to the server manually after class hour. In addition, many devices are needed if there are many classes at the same time. Soewito, et al. (2015) has proposed an employee attendance system on Android smartphone using fingerprint and GPS integrated with payment system. From the user smartphone, the system recorded fingerprint, attendance time, and the coordinate of position trough GPS that available on the smartphone to avoid a long queue and fake attendance. However not all Android smartphone are equipped with fingerprint scanner. Moreover, recording the user position through GPS on Android smartphone is inaccurate. According to Bauer (2013) GPS on Android smartphone had deviation about 10-93 m from the actual position. Therefore, employees who are outside the office but still close enough to the office can be recorded as present. Almost all proposed attendance systems based on fingerprint recognition did not report recognition accuracy except the system proposed by Zainal et al. (2016), which is 85% with total recognition time around 7-9 min for 27 students. Moreover, there is a drawback in attendance system based on fingerprint recognition. As reported by Zainal et al. (2016), the system cannot recognize a fingerprint if it is wet, dirty, or broken.

Chintalapati and Raghunadh (2013); Fuzail et al. (2014); Mehta and Tomar (2016); Raghuwanshi and Swami (2017); Sayeed et al. (2017); Wagh et al. (2015); Wati Mohamad Yusof et al., 2018 have proposed automated student attendance system based on face recognition. The proposed systems were used a camera to capture either all student faces at once (Fuzail, et al., 2014; Mehta and Tomar, 2016; Raghuwanshi and Swami, 2017; Wagh, et al., 2015) or one by one (Chintalapati and Raghunadh, 2013; Sayeed, et al., 2017: Wati Mohamad Yusof et al., 2018), Chintalapati and Raghunadh (2013) used principle component analysis (PCA) and local binary pattern (LBP) combined with some classifier to perform face recognition and achieved the best classification accuracy of 78% by using LBP and Euclidean distance for 80 students. Sayeed et al. (2017) have proposed a real time face recognition using PCA and Euclidean distance for attendance system. Wati Mohamad Yusof et al. (2018) have proposed a real time internet based attendance system using face recognition. The proposed system employed Haar-cascade for face detection combined with LBP for face recognition. The systems proposed by Chintalapati and Raghunadh (2013); Sayeed et al. (2017); Wati Mohamad Yusof et al. (2018) are not efficient since they only used a camera to capture student face image one by one. Fuzail et al. (2014); Wagh et al. (2015), Mehta and Tomar (2016), and Raghuwanshi and Swami (2017) employed a camera to capture all students face in a classroom at once. This strategy can avoid the occurrence of queues during attendance process. However, the attendance systems that use this strategy had a low accuracy on face recognition as reported by Raghuwanshi and Swami (2017), that were 53.33% and 60% using principle component analysis (PCA) and Euclidean distance and linear discriminant analysis (LDA), respectively.

The using of barcode (Noor et al., 2015), QR code (Rahni et al., 2015), RFID (Arulogun et al., 2013; Bhalla et al., 2013; Hussain et al., 2014; Rjeib et al., 2018), and NFC (Mohandes, 2017) is another alternative to record student identity in an attendance system. Attendance process in the systems proposed by Arulogun et al. (2013); Bhalla et al. (2013); Hussain et al. (2014); Noor et al. (2015); Rahni et al. (2015); Rjeib et al. (2018) was very simple, students only needed to scan their student card contained bar-

code, QR code, or RFID using the system to record attendance. While in NFC based attendance system (Mohandes, 2017), students placed their NFC phone near lecture's NFC phone when entering classroom. This process can lead to a long queue during attendance process. Fake attendance can also be occurred since student card contained barcode, QR codes, or RFID and NFC phone are easily transferable from one student to another. In addition, not all smartphones are equipped with NFC systems. To overcome this problem, the using of palm vein can be considered to recognize student in attendance system as proposed by Bayoumi et al. (2015). However, not all cameras can be used to capture the image of palm vein. Furthermore, the accuracy of palm vein recognition in attendance system proposed in (Bayoumi et al., 2015) was only 78%. Therefore, from the current state of the art of automated attendance system it can be found that face recognition is the best approach to recognize student in an attendance system.

Currently, the number of Android smartphone is growing rapidly. Almost all students have at list an Android smartphone equipped with camera. According to Pratama (2017), 95.24% of university students in Indonesia have their own smartphone in 2016. This phenomenon can be used to develop an attendance system using face recognition through Android smartphone. By implementing such a system, long queues occurred in previous automated attendance process can be avoided. However, it is necessary to create a mechanism to ensure that every student really attend in the course. Furthermore, the accuracy of face recognition also needs to be improved to guaranty the system can be implemented for several courses with a large number of students.

This paper proposed an attendance system using face recognition by employing Android smartphone to capture student face. The image was then sent to server for attendance process. Some innovations have been performed in the proposed system. First, every student only needed to capture his/her face image using his/her Android smartphone to avoid a long queue. Second, in case a student does not have a smartphone, the proposed system was designed such that the student who does not have a smartphone can use other student's smartphone to process his/her attendance. Third, the proposed system employed a simple classifier to recognize student face. The last, to increase face recognition accuracy, the proposed system only used a classifier in a certain course. The rest of the paper is organized as follow. Section 2 describes the required materials and method used in the proposed attendance system. The experimental result and its analysis are presented in Section 3. Finally the conclusion is drawn in Section 4.

2. Materials and method

2.1. Materials

The materials used to develop the proposed attendance system consisted of hardware, software, and face image data set. The hardware was Android smartphone, Raspberry Pi, monitor, and computer server. The proposed attendance system required an Android smartphone 4.3 (Jelly Bean) or later with camera and internet connection to open the attendance system by the lecturer and to process the student attendance. A Quad Core 1.2 GHz Broadcom BCM2837 64bit and 1 GB RAM Raspberry Pi 3 Model B was used to get the course information from the server and displayed it to the monitor at front of classroom. A 3.60 GHz Intel(R) Core (TM) i7–7700 and 16 GB RAM computer with Ubuntu Linux version 4.15.0-24-generic operating system was used as server.

Two Android applications were developed for the proposed attendance system, one for lecturer and one for student. The applications were developed in Android Studio. The applications employed Volley (Developers, 2018), an HTTP library for Android,

and OpenCV (Bradski, 2000), a computer vision library, for networking with the server and image processing, respectively. A web client application was developed in PHP language to request information for opened attendance system by the Raspberry Pi from the server and to display the information on the monitor at the front of classroom. On the server side, an application was also developed in PHP language for communication with the Android smartphone and the Raspberry Pi. Moreover to carry out face recognition and attendance processing tasks in the server, a python based application was developed by employing OpenCV (Bradski, 2000) and Scikit-learn (Pedregosa et al., 2011) libraries for image processing and face image classification, respectively. All data used in the proposed attendance system were managed in the server using MySQL. The proposed attendance system used two connection types. Wi-Fi connection, to connect the Android smartphone and the server, and LAN connection, to connect the Raspberry Pi to the server.

2.2. Student registration

Every student in a course needed to register his/her face image and student registration number to the attendance system. The face image of every student was captured 10 times in the perpendicular direction to the smartphone camera with different expression, including normal, smiling, laughing, and sad using a menu in the Android application for student, as shown in Fig. 1. Before capturing his/her face image, the student needed to make sure that his/her face has been detected by the attendance system. The proposed attendance system employed Viola Jones algorithm (Viola and Jones, 2004) to detect face area in the image. Once his/her face detected the student was asked to capture his/her face image. The image was captured in RGB color space and cropped into a 224×224 pixels such that the entire face is contained in the image. The cropped image was stored in PNG format with a unique file name related to student registration number. The image was then uploaded to the server to build a face image data set. The server is located in campus. This process was performed automatically by the proposed system without any intervention from the system administrator. The server is placed in campus and there is no one can access the face image database except the system and the system administrator. Therefore, the confidentiality of the face image database is really maintained.

Some students captured his/her face images in a very low lighting intensity. Consequently, some face image had a very low intensity. Therefore such images were removed from the face image

data set. Finally, the face image data set consisted of 4209 face images was created and would be used to build a classifier for face recognition. The images were acquired from 423 students registered at 21 courses. The number of students and face images in a course were between 19 and 30 and between 186 and 300, respectively. Fig. 2 shows the example of face images in the data set. The authors have received permission from students whose face images are used in his paper.

2.3. Attendance process

The attendance process for the proposed attendance system consisted of several steps starting from system opening, followed by QR code generation, face capturing, face recognition, and attendance processing. The architecture and global steps for the proposed attendance system are shown in Fig. 3 and the details are explained as follow.

2.3.1. System opening

To open the attendance system of a course, the lecturer of the course needed to enable the system through his/her Android smartphone by choosing an appropriate course provided by the server. The data of chosen course was sent to the server through http protocol. An Android application was developed to facilitate the lecturer to take this step. From the application lecturer could also cancel the class, change class schedule, and obtain student attendance report. The user interface for the application can be seen in Fig. 4.

2.3.2. QR code generation

Once the server received the information about the opening of attendance system for a certain course, the server generated QR code contained information about course code, lecturer name, and schedule for the course using Simple QrCode (https://www.simplesoftware.io/docs/simple-qrcode). Every minute the Raspberry Pi located in the classroom requested the status of attendance system for the course that will be conducted in the classroom. If the attendance system has been opened by the lecturer then the Raspberry Pi downloaded the generated QR code from server and displayed it to a monitor located at the front of classroom. Fig. 5 shows the example of displayed QR code.

2.3.3. Face capturing

To enter the opened course attendance system, a student needed to capture the displayed QR code using the attendance sys-







Fig. 1. The application for student registration.

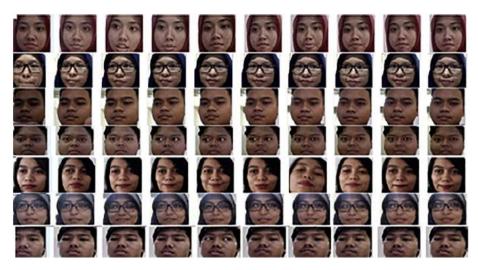


Fig. 2. The example of face image in the data set.

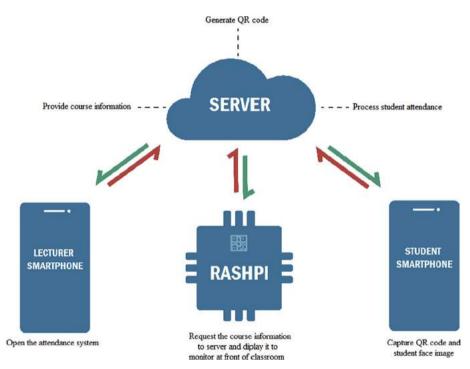


Fig. 3. The architecture and global steps for the proposed attendance system.

tem application installed in his/her own Android smartphone. This process was used to obtain the information of opened course and to make sure the student attend in the course. To minimize the possibility of cheating performed by students in attendance process, for example using QR code captured by other student, the system used campus intranet connection which is divided into several Wi-Fi segments for communication between smartphones and server. Therefore, the students who are not on Campus would not be able to process their attendance. The system used QRCodeScanner (https://github.com/blikoon/QRCodeScanner), a QR scanning library for Android, to scan displayed QR code. The student was then asked to input his/her student registration number, and capture his/her face using the attendance system application. The image was captured in RGB color space and stored in PNG format. If the captured image contained a face then the image was cropped into a 224×224 pixels image such that the entire face is contained in the cropped image. To perform the cropping process, the Viola Jones algorithm (Viola and Jones, 2004) was also used to detect face region in the image. Fig. 6 shows the example of captured and cropped images. The cropped image, course information, and student registration number were then uploaded to server for face recognition and attendance process.

2.3.4. Face recognition

In the server, the cropped image was converted to grayscale image and resized to a 96×96 pixels image. The grayscale value for every pixel in the grayscale image was transformed into a 9216 dimensional vector, as shown in Fig. 7. This vector was used as input feature to a classifier for face recognition. In this step, student registration number was used as class label or the target variable of classifier. The proposed attendance system used some simple classifiers for face recognition, including logistic regression

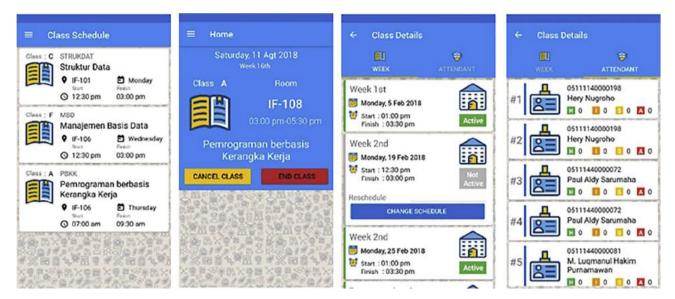


Fig. 4. The application for lecturer.



Fig. 5. The example of displayed QR code.



Fig. 6. The example of captured and cropped image.

(LR), linear discriminant analysis (LDA), and k-nearest neighbor (k-NN). Such classifier was chosen since it does not require a high computational cost and a high computer resource. Therefore the load of server was not too heavy either during classifier training or during simultaneously accessed by many students for attendance processing.

2.3.4.1. Logistic regression. Logistic regression is a simple binary classifier that can be extended to multiclass classifier by implementing the one versus the rest strategy. Logistic regression

assigns an unknown sample to a class C_i that has highest class posteriors distribution $P(C_i|\mathbf{x}, \mathbf{w}, b)$ as in equation.

$$P(C_i|\mathbf{x},\mathbf{w},b) = \frac{1}{1 + e^{-y(\mathbf{w}\cdot\mathbf{x}+b)}}$$

where $\mathbf{x} = (x_1, x_2, ..., x_n)$ is input feature, (\mathbf{w}, b) is weight, and $y \in \{-1, 1\}$ is the class label. The proposed system estimated weight (\mathbf{w}, b) using the implementation of trust region Newton method (Lin et al., 2007) in LIBLINEAR library (Fan et al., 2008) by minimizing a cost function defined in equation.

$$f(\mathbf{w}, b) = \frac{1}{2} [\mathbf{w}, b]' [\mathbf{w}, b] + C \sum_{i=1}^{l} \log(1 + e^{-y_i(\mathbf{w}' \mathbf{x}_i + b)})$$

where C > 0 is a penalty parameter, $y_i \in \{-1, 1\}$ is class label, $x_i, i = 1, 2, ..., l$, is feature vector for training example, and l is the number of training example.

2.3.4.2. Linear discriminant analysis (LDA). LDA perform classification by determining linear decision boundaries that maximizing between-class scatter and minimizing within-class scatter. LDA assume that the class-conditional density of input feature $\mathbf{x} = (x_1, x_2, ..., x_n)$ in class C_i is normal multivariate with mean $\boldsymbol{\mu}_i$ and covariance matrix \sum for all i = 1, 2, ..., k, as in equation.


$$P(\mathbf{x}|C_i) = \frac{1}{(2\pi)^{n/2} |\sum|^{1/2}} e^{-1/2(\mathbf{x} - \boldsymbol{\mu}_i)' \sum (\mathbf{x} - \boldsymbol{\mu}_i)}$$
 3

By using this assumption LDA assigns an unknown sample to a class C_i if it has greatest linear discriminant value (Hastie et al., 2009). The linear discriminant function of class C_i is calculated using equation.

$$\delta_i(x) = x' \sum_{i=1}^{-1} \mu_i - \frac{1}{2} \mu_i' \sum_{i=1}^{-1} \mu_i + \log \pi_i$$
 4

where μ_i is the prior probability of C_i .

2.3.4.3. k-nearest neighbor (k-NN). k-NN classifier assign an unknown sample to a class that has maximum number of examples close to the sample among k neighbors (Alpaydin, 2014). In the experiment, the proposed system used k=1 and the distance between the sample and its neighbors was measured using Euclidean distance as in equation.

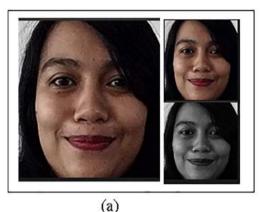

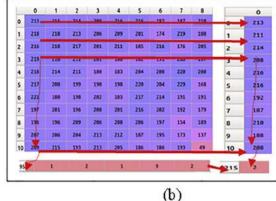


Fig. 7. The example of transformation (a) from cropped image into gray scale image and (b) from gray scale image (96x96) into gray scale vector (9216 × 1).

$$d(\boldsymbol{x},\boldsymbol{x}_i) = \sqrt{\sum_{j=1}^{n} (x_j - x_{ij})^2}$$

where $\mathbf{x} = (x_1, x_2, ..., x_n)$ and $\mathbf{x}_j = (x_{j1}, x_{j2}, ..., x_{jn})$ are the feature vectors for the unknown sample and the jth neighbor j = 1, 2, ..., k, respectively, and n is the dimension of feature vector.

2.3.5. Attendance processing

If student registration number resulted from step 4 match with student registration number inputted by student in step 3 then the student got a notification from the attendance system that his/her attendance has been recorded. Otherwise, the student was asked to capture his/her face once again. The result of attendance process was then reported to lecturer through the attendance system



Fig. 8. The attendance report in lecturer's application.

application installed in his/her Android smartphone, as shown in Fig. 8.

2.4. Experimental setup

An experiment has been carried out in the laboratory to find the best classifier in two training scenarios. The first scenario, a classifier was used in attendance system for all courses. In this scenario all face image samples from all students registered at all courses were used to train the classifier. The second scenario, a classifier was only used in attendance system for a certain course. Therefore, if there were *n* courses, face image samples were divided into *n* sub samples according to the list of course participants. Each sub samples was used to train the classifier for attendance system in the corresponding course. The result of this step was student registration number related to the recognized image.

To validate the accuracy of the classifier for face recognition, the proposed attendance system used stratified k-fold cross validation in the training and testing processes (Alpaydin, 2014). The face image data set was randomly divided into k mutually exclusive subsets with equal size such that the number of face images in every class has same proportion for all subsets. A subset was used as testing data and the remaining k-1 subsets were used to train the classifier. The training and testing processes were repeated k times such that every subset is used as testing data on exactly once iteration. Fig. 9 depicts the cross validation process.

For every testing data, the accuracy of the classifier was calculated using equation.

$$Acc_i = \frac{cc_i}{N_i} \times 100\%$$

where Acc_i , cc_i and N_i are the accuracy of classifier, the number of correctly classified sample, and the number of sample on ith testing data, respectively. The average of Acc_i , i=1,2,...,k was calculated to obtain the final accuracy for the classifier. In this validation, the proposed attendance system used 2-fold and 5-fold cross validations to validate the accuracy of classifier and to investigate the influence of increasing the number of sample in training data on classification accuracy.

3. Results and discussion

3.1. First experimental scenario

As stated in section 2, in the first experimental scenario all face image data were used to train a classifier for face recognition process. The classification results for every classifier with the first



Fig. 9. k-fold cross validation process.

experimental scenario are tabulated in Table 1. As can be seen from Table 1, LR produced higher classification accuracy, which were 93.22% and 95.21% for 2-fold and 5-fold cross validation respectively, compared to LDA (93.17% and 93.36%) and k-NN (86.06% and 88.37%). In 2-fold cross validation 50% image data set was used as training data, while in 5-fold cross validation used 80% image data set. It can be observed in Table 1 that by increasing 30% training data, k-NN achieved the most significant increasing in classification accuracy (2.31%) followed by LR (1.99%) and LDA (0.19%). Therefore, it can be inferred that increasing the number of training data would significantly improve classification accuracy for k-NN and LR.

Although LR achieved the best classification accuracy, it was not efficient in term of computational time. As can be seen in Table 1, in 2-fod and 5-fold cross validation LR required 1339.89 s and 5143.99 s for training in the server, respectively, while LDA required only 27.80 s and 201.67 s. On the other hand, the classification accuracy of LR was not significantly different from LDA, which was only 0.05%. In this scenario, the server required about 0.000190 s, 0.000179 s, and 0.033409 s to recognize a face image using LR, LDA, and k-NN, respectively.

3.2. Second experimental scenario

In the second experimental scenario face image data set was partitioned into 21 sub data sets according to the list of course participant in 21 courses. The distribution of students and face images for all courses are depicted in Fig. 10. For classification task, there were 21 classifiers (one classifier for one course) used by the proposed attendance system to perform face recognition. Each classifier was trained using the corresponding sub data set. Table 2 summarizes the classification results for LR, LDA, and k-NN.

As can be seen from Table 2, on average LR produced higher classification accuracy, which were 96.53% and 97.48% for 2-fold and 5-fold cross validations respectively, compared to LDA (95.24% and 97.29%) and k-NN (91.86% and 93.05%). This result outperforms the recognition accuracy in attendance systems pro-

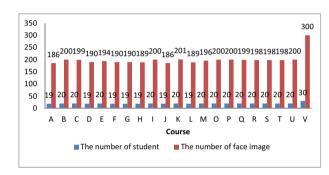


Fig. 10. The distribution of students and face image for all courses.

posed in (Mohandes, 2017; Raghuwanshi and Swami, 2017; Zainal, et al., 2016). In 2-fold cross validation, the numbers of classifier that achieved classification accuracy greater than classification accuracy in the first experimental scenario were 20, 16, and 21 for LR, LDA, and k-NN, respectively. On the other hand, there were 15, 18, and 14 for LR, LDA, and k-NN, respectively, in 5-fold cross validation. Furthermore, it can be seen in Table 2 that by increasing 30% training data, on average LDA achieved the most significant increasing in classification accuracy (2.05%) followed by k-NN (1.19%) and LR (0.95%). Therefore, it can be concluded that by using the second experimental scenario, the classification performance could be improved about 2.07% until 5.80% both in 2-fold and 5-fold cross validations.

In the term of computational time, the second experimental scenario could reduce training time about 65.51% until 96.46% both in 2-fold and 5-fold cross validations, as shown in Table 2. However, LR still required more training time (48.98 s and 181.92 s) compared to LDA (9.59 s and 42.52 s) and k-NN (5.36 s and 7.42 s) both in 2-fold and 5-fold cross validations. In this scenario, the server required about 0.000042 s, 0.000096 s, and 0,001683 s to recognize a face image sample using LR, LDA, and k-NN, respectively. Therefore, based on classification accuracy and training

Table 1The classification results for the first experimental scenario.

Classifier	2-fold cross validation		5-fold cross validation	
	Accuracy (%)	Training time (s)	Accuracy (%)	Training time (s)
LR	93.22	1339.89	95.21	5143.99
LDA	93.17	27.80	93.36	201.67
k-NN	86.06	60.96	88.37	52.599

 Table 2

 Classification results for the second experimental scenario.

Classifier	The number of classifier	2-fold cross validation		5-fold cross validation	
		Average accuracy (%)	Total training time (s)	Average accuracy (%)	Total training time (s)
LR	21	96.53	48.98	97.48	181.92
LDA	21	95.24	9.59	97.29	42.52
k-NN	21	91.86	5.36	93.05	7.42

Table 3TPR, FNR, TNR, and FPR for LDA in the second experimental scenario.

	TDD (0()	ENID (0()	TND (0()	EDD (0()
Course	TPR (%)	FNR (%)	TNR (%)	FPR (%)
Α	95.16	4.84	99.73	0.27
В	98.00	2.00	99.89	0.11
C	98.99	1.01	99.95	0.05
D	97.37	2.63	99.85	0.15
E	96.39	3.61	99.81	0.19
F	97.89	2.11	99.88	0.12
G	94.74	5.26	99.71	0.29
Н	97.35	2.65	99.85	0.15
I	98.50	1.50	99.92	0.08
J	95.70	4.30	99.76	0.24
K	97.51	2.49	99.87	0.13
L	97.88	2.12	99.88	0.12
M	99.65	0.35	99.98	0.02
0	97.50	2.50	99.87	0.13
P	96.50	3.50	99.82	0.18
Q	95.98	4.02	99.79	0.21
R	98.48	1.52	99.92	0.08
S	100.00	0.00	100.00	0.00
T	98.99	1.01	99.95	0.05
U	98.00	2.00	99.89	0.11
V	95.67	4.33	99.85	0.15
Average	97.44	2.56	99.87	0.13

time, the proposed attendance system employed LDA resulted from the second experimental scenario for face recognition step. For further analysis the classification result of LDA in the second experimental scenario was divided into True Positive Rate (TPR), False Negative Rate (FNR), True Negative Rate (TNR) and False Positive Rate (FPR), as summarized in Table 3. As can be seen in Table 3, LDA produced TPR and TNR of 97.44% and 99.87% on average, respectively. It can be also seen in Table 3, on average LDA achieved low FNR and FPR of 2.56% and 0.13%, respectively. This results show that LDA could recognize the face of every student with a good performance. Based on these results, the system has been implemented to process the attendance of 21 courses for three semesters without any significant problem.

4. Conclusion

This paper proposes an Android based course attendance system using face recognition. The system asked every registered student to capture his/her face image and QR code displayed at the front of classroom using his/her smartphone. The captured image was then uploaded to the server for face recognition and attendance process. To achieve a good face recognition accuracy and efficient processing time, a classifier was only used to perform face recognition in a certain course. The experimental result shows that the proposed attendance system achieved face recognition performance of 97.29% by employing LDA and only needed 0.000096 s for face recognition process in the server. For future work, the investigation of the using of Bluetooth devise for measuring the distance between student's smartphone and Raspberry Pi located in classroom, to ensure students attend in a course, will be considered

to minimize the possibility of cheating performed by students in attendance process.

Acknowledgements

The authors would like to thank Intitut Tehnologi Sepuluh Nopember Surabaya for providing facilities and financial support under Grant no 1206/PKS/ITS/2018.

Declarations of interest

None.

References

Alpaydin, E., 2014. Introduction to Machine Learning. MIT press.

Arulogun, O., Olatunbosun, A., Fakolujo, O., Olaniyi, O., 2013. RFID-based students attendance management system. Int. J. Sci. Eng. Res. 4, 1–9.

Bauer, C. 2013. On the (in-) accuracy of GPS measures of smartphones: a study of running tracking applications. In: Proceedings of International Conference on Advances in Mobile Computing & Multimedia. pp. 335: ACM.

Bayoumi, S., Aldayel, A., Alotaibi, M., Aldraihem, M., Alrashed, S., Alzahrahi, S., 2015. Class attendance system based-on palm vein as biometric information. J. Theoret. Appl. Informat. Technol., 77

Bhalla, V., Singla, T., Gahlot, A., Gupta, V., 2013. Bluetooth based attendance management system. Int. J. Innovat. Eng. Technol. (IJIET) 3, 227–233.

Bradski, G. 2000. The Open CV Library. Dr. Dobb's Journal: Software Tools for the Professional Programmer, 25, pp. 120–123.

Chintalapati, S., Raghunadh, M. 2013. Automated attendance management system based on face recognition algorithms. In: Computational Intelligence and Computing Research (ICCIC), 2013 IEEE International Conference on, IEEE. pp. 1–5.

Developers, A. 2018. Transmitting network data using Volley. In.

Fan, R.-E., Chang, K.-W., Hsieh, C.-J., Wang, X.-R., Lin, C.-J., 2008. Liblinear: a library for large linear classification. J. Mach. Learn. Res. 9, 1871–1874.

Fuzail, M., Nouman, H.M.F., Mushtaq, M.O., Raza, B., Tayyab, A., Talib, M.W., 2014. Face detection system for attendance of class' students. Int. J. Multidiscipl. Sci. Eng., 5

Hastie, T., Tibshirani, R., Friedman, J., 2009. The Elements of Statistical Learning New York. Springer, NY.

Hussain, E., Dugar, P., Deka, V., Hannan, A. 2014. RFID based student attendance system. In: National Conference cum Workshop on Bioinformatics and Computational Biology. Citeseer. pp. 30–32.

Islam, M. M., Hasan, M. K., Billah, M. M., Uddin, M. M. 2017. Development of smartphone-based student attendance system. In: 2017 IEEE Region 10 Humanitarian Technology Conference (R10-HTC). pp. 230–233.

Lin, C.-J., Weng, R.C., Keerthi, S.S. 2007. Trust region newton methods for large-scale logistic regression. In: Proceedings of the 24th international conference on Machine learning. ACM pp. 561–568.

Mehta, P., Tomar, P., 2016. An efficient attendance management sytem based on face recognition using Matlab and Raspberry Pi 2. Int. J. Eng. Technol. Sci. Res., 3

Mohamed, B. K. P., Raghu, C. V. 2012. Fingerprint attendance system for classroom needs. In: 2012 Annual IEEE India Conference (INDICON). pp. 433–438.

Mohandes, M.A., 2017. Class attendance management system using NFC mobile devices. Intell. Automat. Soft Comput. 23, 251–259.

Noor, S.A.M., Zaini, N., Latip, M.F.A., Hamzah, N. 2015. Android-based attendance management system. In: 2015 IEEE Conference on Systems, Process and Control (ICSPC) (pp. 118–122).

Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., 2011. Scikit-learn: machine learning in Python. J. Mach. Learn. Res. 12, 2825–2830.

Pratama, A.R., 2017. Exploring Personal Computing Devices Ownership Among University Students in Indonesia. Springer International Publishing, Cham, pp. 835–841.

Raghuwanshi, A., Swami, P. D. 2017. An automated classroom attendance system using video based face recognition. In: Recent Trends in Electronics, Information & Communication Technology (RTEICT), 2017 2nd IEEE International Conference on: IEEE. pp. 719–724.

- Rahni, A., Zainal, N., Adna, M.Z., Othman, N., Bukhori, M., 2015. Development of the online student attendance monitoring system (SAMSTM) based on QR-codes and mobile devices. J. Eng. Sci. Technol. 10, 28–40.
- Rao, S., Satoa, K., 2013. An attendance monitoring system using biometrics authentication. Int. J. Adv. Res. Comput. Sci. Softw. Eng., 3
- Rjeib, H.D., Ali, N.S., Al Farawn, A., Al-Sadawi, B., Alsharqi, H., 2018. Attendance and information system using RFID and web-based application for academic sector. Int. J. Adv. Comput. Sci. Appl. (IJACSA), 9.
- Sayeed, S., Hossen, J., Kalaiarasi, S., Jayakumar, V., Yusof, I., Samraj, A., 2017. Real-time face recognition for attendance monitoring system. J. Theoret. Appl. Informat. Technol. 95.
- Soewito, B., Gaol, F. L., Simanjuntak, E., Gunawan, F. E. 2015. Attendance system on Android smartphone. In: 2015 International Conference on Control, Electronics, Renewable Energy and Communications (ICCEREC) pp. 208–211.
- Viola, P., Jones, M.J., 2004. Robust real-time face detection. Int. J. Comput. Vision 57, 137–154.

- Wagh, P., Thakare, R., Chaudhari, J., Patil, S. 2015. Attendance system based on face recognition using eigen face and PCA algorithms. In: Green Computing and Internet of Things (ICGCIoT), 2015 International Conference on: IEEE pp. 303– 308.
- Wati Mohamad Yusof, Y., Asyraf Mohd Nasir, M., Azura Othman, K., Izwan Suliman, S., Shahbudin, S., Mohamad, R., 2018. Real-time internet based attendance using face recognition system. Int. J. Eng. Technol. 7 (3.15). Special Issue 15. Zainal, N.I., Sidek, K.A., Gunawan, T.S., 2016. Portable anti forgery recognition for
- Zainal, N.I., Sidek, K.A., Gunawan, T.S., 2016. Portable anti forgery recognition for attendance system using fingerprint based biometric. ARPN J. Eng. Appl. Sci. 11, 396–403.
- Zainal, N. I., Sidek, K. A., Gunawan, T. S., Manser, H., Kartiwi, M. 2014. Design and development of portable classroom attendance system based on Arduino and fingerprint Biometric. In: Information and Communication Technology for The Muslim World (ICT4M), 2014 The 5th International Conference on: IEEE. pp. 1–4.

Darry Street



Journal of King Saud University – Computer and Information Sciences



Journal of King Saud University - Computer and Information Sciences

Open access

10.1 13.473

CiteScore

Impact Factor

Submit your article Guide for authors



Menu



Search in this journal

About the journal

Aims and scope Editorial board Abstracting and indexing

Announcement: In 2022 the Journal of King Saud University - Computer and Information Sciences will become an author paid open access journal. Authors who submit their manuscript after October 31st 2021 will be asked to pay an Article Processing Charge (APC) after acceptance of their paper to make their work immediately, permanently, and freely accessible to all. Discounts may be available for authors from selected Research4Life countries.

The Journal of King Saud University Computer and Information Sciences is a refereed, international journal that covers all aspects of both foundations of computer and its practical applications. The journal publishes original papers in the areas of, but not limited to Arabization

Big Data

Bioinformatics

Biometrics

Cloud Computing

Computer Graphics

Computer Vision

Crowd Computing

Data Mining

Data Warehouse

e-Business

e-Learning

Embedded Systems

Fuzzy Systems

Grid Computing

High Performance Computing

Image Processing

Information Security

Internet of Things

Machine Learning

Mobile Computing

Natural Language Processing

Net Centric Computing

Network Protocols

Network Security

Pattern Recognition

Pervasive Computing

Robotics

Social Networks

Software Engineering

FEEDBACK 📮

1 of 2 1/6/2022, 10:50 AM

Speech Processing Wireless and Mobile Networks Wireless Sensor Networks

Special emphasis is given to recent trends related to the cutting-edge research within the domain.

The journal publishes also Special Issues within its scope resulting from specific and dedicated editorial efforts or covering a particular theme.

All articles are subjected to extensive review by international reviewers.

Visit the University journal homepage.

ISSN: 1319-1578

Copyright © 2022 King Saud University. Production and hosting by Elsevier B.V. All rights reserved



Copyright © 2022 Elsevier B.V. or its licensors or contributors. ScienceDirect ® is a registered trademark of Elsevier B.V.







Journal of King Saud University - Computer and Information Sciences

Open access

10.1 13.473
CiteScore Impact Factor

Submit your article Guide for authors

 \equiv N

Menu

Q

Search in this journal

Volume 33, Issue 3

Pages 243-374 (March 2021)

▲ Download full issue

Previous vol/issue

Next vol/issue >

Receive an update when the latest issues in this journal are published

Sign in to set up alerts

Review

Review article Open access

Fruits and vegetables quality evaluation using computer vision: A review

Anuja Bhargava, Atul Bansal

Pages 243-257

◆ Download PDF

Article preview 🗸

Original Articles

Research article Open access

Improved triangular-based star pattern recognition algorithm for low-cost star trackers

Abderrahim Nabi, Zoubir Ahmed-Foitih, Mohammed El-Amine Cheriet

Pages 258-267

▲ Download PDF

Article preview 🗸

Research article Open access

An attack resistant key predistribution scheme for wireless sensor networks

Priyanka Ahlawat, Mayank Dave

Pages 268-280

FEEDBACK 📮

1 of 3 1/6/2022, 10:50 AM

Article preview 🗸 Research article Open access A framework for spectrum harvesting in heterogeneous wireless networks integration Samir Gourdache, Azeddine Bilami, Kamel Barka Pages 281-290 ▲ Download PDF Article preview 🗸 Research article Open access D-FAC: A novel ϕ -Divergence based distributed DDoS defense system Sunny Behal, Krishan Kumar, Monika Sachdeva Pages 291-303 Article preview 🗸 Research article Open access An android based course attendance system using face recognition Dwi Sunaryono, Joko Siswantoro, Radityo Anggoro Pages 304-312 ▲ Download PDF Article preview 🗸 Research article Open access A new SAR image despeckling using correlation based fusion and method noise thresholding Prabhishek Singh, Raj Shree, Manoj Diwakar Pages 313-328 ▲ Download PDF Article preview V Research article Open access Computer aided diagnosis for thyroid cancer system based on internal and external characteristics Hanung Adi Nugroho, Zulfanahri, Eka Legya Frannita, Igi Ardiyanto, Lina Choridah Pages 329-339 ▲ Download PDF Article preview 🗸 Research article Open access Polyscale gradients residual demosaicking M.S. Safna Asiq, W.R. Sam Emmanuel Pages 340-350 Article preview V Research article Open access An Enhanced Opinion Retrieval Approach on Arabic Text for Customer Requirements Expansion Sarah Saad Eldin, Ammar Mohammed, Hesham Hefny, Ahmed Sharaf Eldin Ahmed Pages 351-363 Article preview 🗸 Research article Open access Dynamizing Dijkstra: A solution to dynamic shortest path problem through retroactive priority queue Sunita, Deepak Garg Pages 364-373 FEEDBACK 📮

1/6/2022, 10:50 AM 2 of 3



Previous vol/issue

Next vol/issue >

ISSN: 1319-1578

Copyright © 2022 King Saud University. Production and hosting by Elsevier B.V. All rights reserved



Copyright o 2022 Elsevier B.V. or its licensors or contributors. ScienceDirect o is a registered trademark of Elsevier B.V.







Journal of King Saud University - Computer and Information Sciences

Open access

10.1

13.473

CiteScore

Impact Factor

Submit your article

Guide for authors

 \equiv

Menu

Q

Search in this journal

About the journal

Aims and scope

Editorial board

Abstracting and indexing

Editor-in-Chief

Professor Nasser-Eddine Rikli

King Saud University College of Computer and Information Sciences, Riyadh, Saudi Arabia

Email this editor 7

Associate Editors

Dr. Noureddine Abbadeni

King Saud University Department of Computer Engineering, Riyadh, Saudi Arabia

Assist. Prof. Laith Abualigah

Amman Arab University Faculty of Computer Sciences and Informatics, Amman, Jordan

Professor Hend S. Al-Khalifa

King Saud University Department of Information Technology, Riyadh, Saudi Arabia

Email this editor ⊲

Assist. Prof. Mznah Abdullah Al-Rodhaan

King Saud University, Riyadh, Saudi Arabia

Email this editor ⊲

Professor Abdulmalik S. Alsalman

King Saud University College of Computer and Information Sciences, Riyadh, Saudi Arabia

Email this editor ¬

Dr. Najwa Altwaijry

King Saud University College of Computer and Information Sciences, Riyadh, Saudi Arabia

Email this editor 7

Professor Mohamed Batouche



1 of 4 1/6/2022, 10:50 AM

University of Constantine, Department of Computer Science, Constantine, Algeria

Email this editor ¬

Dr. Ouiem Bchir

King Saud University, Riyadh, Saudi Arabia

Email this editor 7

Professor Faiza Belala

Abdelhamid Mehri Constantine 2 University Faculty of New Technologies of Information and Communication, Constantine, Algeria

Email this editor 7

Professor Ahmed Bouridane

Northumbria University Department of Computer Science and Digital Technologies, Newcastle Upon Tyne, United Kingdom

Dr. Gianni D'Angelo

University of Salerno Department of Informatics, Fisciano, Italy

Email this editor 7

Dr. Arena Fabio

Kore University of Enna Faculty of Architecture and Engineering, Enna, Italy

Email this editor ¬

Dr. Manar Ibrahim Fawzi Hosny

King Saud University Department of Computer Engineering, Riyadh, Saudi Arabia

Email this editor 7

Dr. Alaaeldin M. Hafez

King Saud University Department of Information Systems, Riyadh, Saudi Arabia

Email this editor 7

Dr. Md Saiful Islam

King Saud University Department of Computer Engineering, Riyadh, Saudi Arabia

Email this editor 7

Dr. Ramdane Maamri

Faculty of New Information and Communication Technologies, El Khroub, Algeria

Dr. Azzeddine Mazroui

Mohammed First University Oujda Faculty of Science, Oujda, Morocco

Email this editor 7

Assoc. Professor Ghulam Muhammad

King Saud University College of Computer and Information Sciences, Riyadh, Saudi Arabia

Dr. Aytuğ Onan

Izmir Katip Celebi University, College of Engineering and Architecture, Department of Computer Engineering, İzmir, Turkey

Email this editor ¬

Dr. Abdeldjalil Ouahabi

Polytechnic University of Tours, Department of Electronics and Energy, Tours, France



Dr. Vito Pirrelli

Antionio Zampolli Institute of computational linguistics National Research Council, Pisa, Italy

Email this editor 7

Professor Aduwati Sali

Putra Malaysia University Department of Computer and Communication Systems Engineering, Serdang, Malaysia

Dr. Amir A. Touir

King Saud University Department of Information Technology, Riyadh, Saudi Arabia

Email this editor 7

Professor Peng-Yeng Yin

National Chi Nan University Information Management, Nantou, Taiwan

Email this editor 7

Professor Gregory Zacharewicz

Engineering College Ales, Ales, France

Email this editor 7

Prof. Dr. Yu-Dong Zhang

University of Leicester, Leicester, United Kingdom

Email this editor 7

Advisory Board

Professor Mehmet Sabih Aksoy

King Saud University College of Computer and Information Sciences, Riyadh, Saudi Arabia

Professor Mansour Alsulaiman

King Saud University Department of Computer Engineering, Riyadh, Saudi Arabia

Email this editor 7

Professor Mohammed Atiquzzaman

The University of Oklahoma School of Computer Science, Norman, Oklahoma, United States of America

Email this editor 7

Professor Mohammad Ilyas

Florida Atlantic University College of Engineering and Computer Science, Boca Raton, Florida, United States of America

Email this editor 7

Professor Yoshiro Imai

Kagawa University Faculty of Engineering Graduate School of Engineering, Takamatsu, Japan

Email this editor 7

Professor Jan Platos

VSB-Technical University of Ostrava Faculty of Electrical Engineering and Computer Science, Ostrava, Czechia

Email this editor 7

Professor Sid-Ahmed Selouani

University of Moncton, Department of Information Management, Moncton, New Brunswick, Canada

Email this editor 7



Professor Jacek Stando

Lodz University of Technology Institute of Mathematics, Lodz, Poland

Email this editor **⋾**

Professor Chin Yee Suen

Concordia University Department of Computer Science and Software Engineering, Montreal, Quebec, Canada

All members of the Editorial Board have identified their affiliated institutions or organizations, along with the corresponding country or geographic region. Elsevier remains neutral with regard to any jurisdictional claims.

ISSN: 1319-1578

Copyright © 2022 King Saud University. Production and hosting by Elsevier B.V. All rights reserved



Copyright © 2022 Elsevier B.V. or its licensors or contributors. ScienceDirect ® is a registered trademark of Elsevier B.V.






4 of 4 1/6/2022, 10:50 AM



Journal of King Saud University - Computer and Information Sciences 3

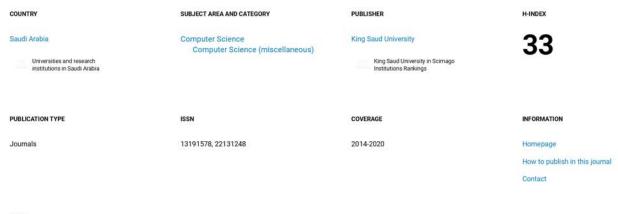

SCOPE


Quartiles

The Journal of King Saud University Computer and Information Sciences is a refereed, international journal that covers all aspects of both foundations of computer and its practical applications. The journal publishes original papers in the areas of, but not limited to: -Arabization -Big Data -Bioinformatics -Biometrics -Cloud Computing -Computer Graphics -Computer Vision -Crowd Computing -Data Mining -Data Warehouse -e-Business -e-Learning -Embedded Systems -Fuzzy Systems -Grid Computing -High Performance Computing -Image Processing -Information Security -Internet of Things -Machine Learning -Mobile Computing -Natural Language Processing -Net Centric Computing -Network Protocols -Network Security -Pattern Recognition -Pervasive Computing -Robotics -Social Networks -Software Engineering -Speech Processing -Wireless and Mobile Networks -Wireless Sensor Networks Special emphasis is given to recent trends related to the cutting-edge research within the domain. The journal publishes also Special Issues within its scope resulting from specific and dedicated editorial efforts or covering a particular theme. All articles are subjected to extensive review by international reviewers.


O Join the conversation about this journal



1 of 6 1/27/2022, 10:32 AM

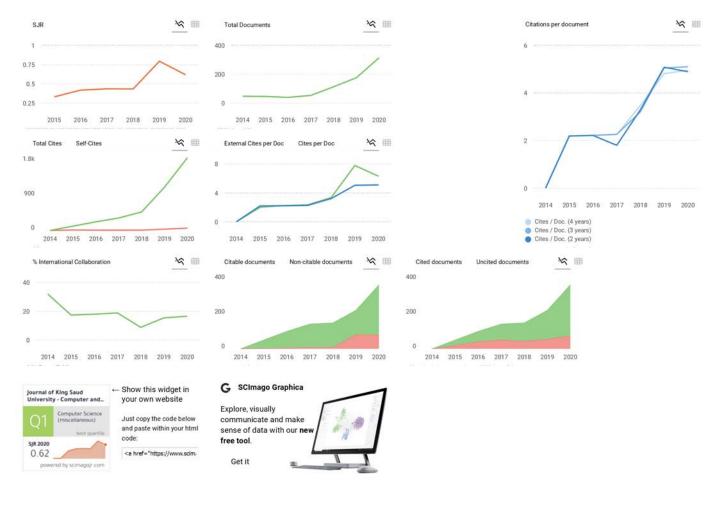

Metrics based on Scopus® data as of April 2021

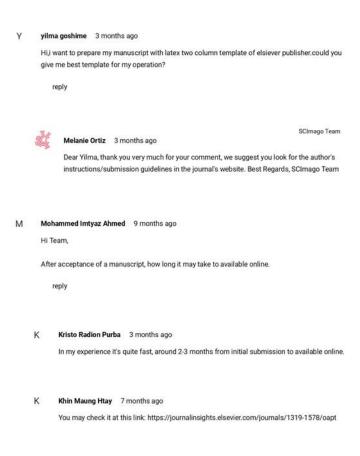

N not find this journal in the Journal Citation Reports 10 months ago

dear editor,

may i know the Journal Citation Reports about Journal of King Saud University Computer and Information Sciences?

only find JOURNAL OF KING SAUD UNIVERSITY SCIENCE

eply



Melanie Ortiz 10 months ago

SCImago Team

SCImago Team

Dear Sir/Madam.

thank you very much for your comment.

SCImago Journal and Country Rank uses Scopus data as a source and our impact indicator is the SJR. The Journal Citation Report (JCR) is based on the Web of Science (WOS) journal's collection. Therefore, the Source and the Methodology used by SJR are different from the JCR.

Best Regards, SCImago Team

A Abderrahim El Qadi 2 years ago

Is this journal indexed in DBLP?

reply



Melanie Ortiz 2 years ago

Dear Abderrahim,

Thank you for contacting us. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus. Unfortunately, we cannot help you with your request referring to the index status. We suggest you consult Scopus database (see the current status of the journal) or other databases (like Wos, DBLP, Pubmed, etc.) for further information. You can also check that information in the journal's website or contact directly with the editorial staff. Best Regards. SCImago Team

E emna sss 2 years ago

Can you inform me is it a journal with fees or free??

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Emna,

thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage or contact the journal's editorial staff, so they could inform you more deeply.

Best Regards, SCImago Team

R Rekha 2 years ago

Pl. share Publication fee for Journal of King Saud University - Computer and Information Sciences.

reply

R Rekha 2 years ago

What is the publication fee for publishing an article/research paper in Journal of King Saud University - Computer and Information Sciences.

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear user,

thank you for contacting us.

Sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage or contact the journal's editorial staff, so they could inform you more deeply.

Best Regards, SCImago Team

H Hi SCImago Team 3 years ago

Would you tell me how much does it cost for publishing a paper in Journal of King Saud University - Computer and Information Sciences. I also wanted to know what is the difference between the two links above please.

- 1- https://www.evise.com/profile/#/JKSUCIS/login.
- $\hbox{2-https://www.journals.elsevier.com/journal-of-king-saud-university-computer-and-information-sciences}$

reply

A Anureet Kaur 3 years ago

What are the chances for this journal to be indexed in SCIE?

reply



Mohammad Hasan 11 months ago

Yes It is Indexed by SCIE and ESCI:

Check here: https://www.elsevier.com/journals/journal-of-king-saud-university-computer-and-information-sciences/1319-1578/abstracting-indexing

A Anureet Kaur 3 years ago

What are the chances of this journal for its inclusion in SCIE?

reply

F Frank van Impe 3 years ago

Surprisingly, there are tremendous language errors in the articles published by this journal which put a huge question mark on its publication policy!

reply

S Sridevi Tharanidharan 3 years ago

I need a paper template for this journal. Kindly send me a link to download.

reply



Elena Corera 3 years ago

Dear Sridevi,

thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you check author's instructions in journal website. You can find that information in SJR website https://www.scimagojr.com

Best Regards, SCImago Team

Mark Roberts 3 years ago

Is this journal indexed in SCI or SCI-E?

reply




Elena Corera 3 years ago

SCImago Team

SCImago Team

Dear user, SCImago Journal and Country Rank uses Scopus data, our impact indicator is the SJR. Check our page to locate the journal. We suggest you consult the Journal Citation Report for other indicators (like Impact Factor) with a Web of Science data source. Best Regards, SCImago Team

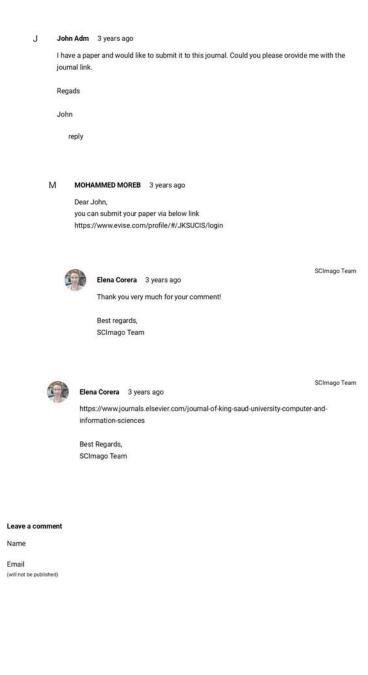

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by: Powered by:

SCImago

Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®

6 of 6 1/27/2022, 10:32 AM

CiteScore 2020

10.1

SJR 2020

0.617

SNIP 2020

2.794

(i)

①

①



Source details

Journal of King Saud University - Computer and Information Sciences

Open Access (i)

Scopus coverage years: from 2014 to 2021

Publisher: King Saud University

ISSN: 1319-1578 E-ISSN: 2213-1248

Subject area: (Computer Science: General Computer Science)

Source type: Journal

View all documents >

Set document alert

Save to source list Source Homepage

CiteScore CiteScore rank & trend Scopus content coverage

Improved CiteScore methodology

CiteScore 2020 counts the citations received in 2017-2020 to articles, reviews, conference papers, book chapters and data papers published in 2017-2020, and divides this by the number of publications published in 2017-2020. Learn more >

CiteScore ₂₀₂₀ ~

 $10.1 = \frac{2,543 \text{ Citations } 2017 - 2020}{251 \text{ Documents } 2017 - 2020}$

Calculated on 05 May, 2021

CiteScoreTracker 2021 ①

 $10.9 = \frac{3,276 \text{ Citations to date}}{301 \text{ Documents to date}}$

Last updated on 04 December, 2021 • Updated monthly

CiteScore rank 2020 ①

Category	Rank	Percentile	
Computer Science General Computer Science	#14/226	94th	

 $\label{eq:citeScore} \mbox{View CiteScore methodology} > \mbox{CiteScore FAQ} > \mbox{Add CiteScore to your site } {\mathscr S}$

About Scopus

What is Scopus Content coverage Scopus blog Scopus API

Language

日本語に切り替える **切換到简体中文** 切換到繁體中文 Русский язык

Customer Service

Help Contact us

ELSEVIER

Privacy matters

Terms and conditions a Privacy policy a

Copyright © Elsevier B.V $_{7}$. All rights reserved. Scopus® is a registered trademark of Elsevier B.V. We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies





Successfully received: submission An Android Based Course Attendance System Using Face Recognition for Journal of King Saud University - Computer and Information Sciences

Journal of King Saud University - Computer and Information Sciences <EviseSupport@elsevier.com> Reply-To: JKSU-CIS@elsevier.com

Tue, Sep 11, 2018 at 8:10 PM

To: joko_siswantoro@staff.ubaya.ac.id

This message was sent automatically. Please do not reply.

Ref: JKSUCIS 2018 909

Title: An Android Based Course Attendance System Using Face Recognition Journal: Journal of King Saud University - Computer and Information Sciences

Dear Dr. Siswantoro,

Thank you for submitting your manuscript for consideration for publication in Journal of King Saud University - Computer and Information Sciences. Your submission was received in good order.

To track the status of your manuscript, please log into EVISE® at: http://www.evise.com/evise/faces/pages/navigation/NavController.jspx?JRNL_ACR=JKSUCIS and locate your submission under the header 'My Submissions with Journal' on your 'My Author Tasks' view.

Thank you for submitting your work to this journal.

Kind regards,

Journal of King Saud University - Computer and Information Sciences

Have questions or need assistance?

The questions of need assistance assistance, please visit our Customer Support site. Here you can search for solutions on a range of topics, find answers to frequently asked questions, and learn more about EVISE® via interactive tutorials. You can also talk 24/5 to our customer support team by phone and 24/7 by live chat and email.

Copyright © 2018 Elsevier B.V. | Privacy Policy



Invitation to revise manuscript JKSUCIS_2018_909

Nasser-Eddine Rikli (Journal of King Saud University - Computer and Information

Wed, Oct 24, 2018 at 1:03 PM

Sciences) <EviseSupport@elsevier.com> Reply-To: rikli@ksu.edu.sa

To: joko siswantoro@staff.ubaya.ac.id

Ref: JKSUCIS 2018 909

Title: An Android Based Course Attendance System Using Face Recognition Journal: Journal of King Saud University - Computer and Information Sciences

Dear Dr. Siswantoro,

Thank you for submitting your manuscript to Journal of King Saud University - Computer and Information Sciences. We have completed the review of your manuscript. A summary is appended below. While revising the paper please consider the reviewers' comments carefully. We look forward to receiving your detailed response and your revised manuscript.

To submit your revised manuscript:

- Log into EVISE® at: http://www.evise.com/evise/faces/pages/navigation/NavController.jspx?JRNL_ACR= JKSUCIS
- Locate your manuscript under the header 'My Submissions that need Revisions' on your 'My Author Tasks' view
- · Click on 'Agree to Revise'
- Make the required edits
- Click on 'Complete Submission' to approve

What happens next?

After approving your submission you will receive a notification that the submission is complete. To track the status of your paper throughout the editorial process, log into EVISE® at: http://www.evise.com/evise/faces/pages/navigation/NavController.jspx?JRNL_ACR=JKSUCIS

I look forward to receiving your revised manuscript as soon as possible.

Kind regards,

Nasser-Eddine Rikli Editor-in-Chief Journal of King Saud University - Computer and Information Sciences

Comments from the editors and reviewers:

-Reviewer 1

-

I am not sure about accepting the presented paper.

In one way, it presents interesting, easy and quick method (based on combining of some known methods) for automatically verification of student's attendance on lectures. The achieved results are more than satisfactory.

On the second side I need some information about things, which are not presented in the paper:

- 1. What does it mean «system achieved face recognition performance of 97.29%»? How it is divided into false positive and false negative? It can be acceptable when the system detects student, which was not present on lecture. Much more complicated is situation that student, which was present is not verified by the system.
- 2. What is one of the students is cheating? F. ex. when one takes photo of QR code using picture of his friend. What the system will do in such a situation? How it will be processed?
- 3. What is the student does not have mobile phone or his/hers phone not allows taking photos or to use internet?

4. And the most important for me: what about ethical questions? What about collecting and processing photos of faces? Where the server is placed and who has access to the pictures?

If the main aim of the paper is only to show, that described method is easy and gives good results - it is OK.

However, if the system will be applicate and used in practical situation (like it was presented) the papers requires, in my opinion, more explanation.

-Reviewer 2

- Although the methods applied are not new, the application contains a valuable research introduction about a smart application on course attendance of students.

-Reviewer 3

-

This paper proposed an Android based course attendance system using face recognition. It has good practical value, but there are some suggestions for improving the paper:

- 1. There are some good methods of face recognition, why did the authors only choose the three methods: LR, LDA, k-NN?
- 2. What features were selected for face? Feature extraction should be described in the paper.
- 3. The authors should clearly describe the innovation of work.

Have questions or need assistance?

For further assistance, please visit our Customer Support site. Here you can search for solutions on a range of topics, find answers to frequently asked questions, and learn more about EVISE® via interactive tutorials. You can also talk 24/5 to our customer support team by phone and 24/7 by live chat and email.

Copyright © 2018 Elsevier B.V. | Privacy Policy



Received revision JKSUCIS_2018_909_R1

Journal of King Saud University - Computer and Information Sciences

Wed, Nov 28, 2018 at 10:23 PM

<EviseSupport@elsevier.com>
Reply-To: JKSU-CIS@elsevier.com
To: joko_siswantoro@staff.ubaya.ac.id

This message was sent automatically. Please do not reply.

Ref: JKSUCIS 2018 909 R1

Title: An Android Based Course Attendance System Using Face Recognition Journal: Journal of King Saud University - Computer and Information Sciences

Dear Dr. Siswantoro,

Thank you for submitting your revised manuscript for consideration for publication in Journal of King Saud University - Computer and Information Sciences. Your revision was received in good order.

To track the status of your manuscript, please log into EVISE® http://www.evise.com/evise/faces/pages/navigation/NavController.jspx?JRNL_ACR=JKSUCIS and locate the submission under the header 'My Submissions with Journal' on your 'My Author Tasks' view.

We appreciate your submitting your revision to this journal.

Kind regards,

Journal of King Saud University - Computer and Information Sciences

Have questions or need assistance?

For further assistance, please visit our Customer Support site. Here you can search for solutions on a range of topics, find answers to frequently asked questions, and learn more about EVISE® via interactive tutorials. You can also talk 24/5 to our customer support team by phone and 24/7 by live chat and email.

Copyright © 2018 Elsevier B.V. | Privacy Policy



Your manuscript JKSUCIS_2018_909_R1 has been accepted

Nasser-Eddine Rikli (Journal of King Saud University - Computer and Information

Sat, Jan 12, 2019 at 11:59 PM

Sciences) <EviseSupport@elsevier.com>

Reply-To: rikli@ksu.edu.sa

To: joko_siswantoro@staff.ubaya.ac.id

Ref: JKSUCIS 2018 909 R1

Title: An Android Based Course Attendance System Using Face Recognition Journal: Journal of King Saud University - Computer and Information Sciences

Dear Dr. Siswantoro,

I am pleased to inform you that your paper has been accepted for publication. My own comments as well as any reviewer comments are appended to the end of this letter.

Your accepted manuscript will now be transferred to our production department. We will create a proof which you will be asked to check. You can read more about this here. Meanwhile, you will be asked to complete a number of online forms required for publication. If we need additional information from you during the production process, we will contact.

Thank you for submitting your work to Journal of King Saud University - Computer and Information Sciences. We hope you consider us again for future submissions.

Kind regards,

Nasser-Eddine Rikli Editor-in-Chief Journal of King Saud University - Computer and Information Sciences

Comments from the editors and reviewers:

- Reviewer 1

_

Have questions or need assistance?

For further assistance, please visit our Customer Support site. Here you can search for solutions on a range of topics, find answers to frequently asked questions, and learn more about EVISE® via interactive tutorials. You can also talk 24/5 to our customer support team by phone and 24/7 by live chat and email.

Copyright © 2018 Elsevier B.V. | Privacy Policy



Share your article [JKSUCI_566] published in Journal of King Saud University - Computer and Information Sciences

Elsevier - Article Status Article_Status@elsevier.com>
To: joko_siswantoro@staff.ubaya.ac.id

Wed, Mar 24, 2021 at 6:27 AM

ELSEVIER

Share your article!

Dear Dr. Siswantoro,

We are pleased to let you know that the final open access version of your article *An Android Based Course Attendance System Using Face Recognition* is now available online, containing full bibliographic details.

The URL below is a quick and easy way to share your work with colleagues, co-authors and friends. Anyone clicking on the link will be taken directly to the final version of your article on ScienceDirect.



Your article link: https://doi.org/10.1016/j.jksuci.2019.01.006

Click on the icons below to share with your network:











You can also use this link to download a copy of the article for your own archive. It also provides a quick and easy way to share your work with colleagues, co-authors and friends. And you are welcome to add it to your homepage or social media profiles, such as Facebook, Google+, and Twitter. Other ways in which you can use your final article have been determined by your choice of user license.

To find out how else you can share your article visit www.elsevier.com/sharing-articles.

Kind regards,

Elsevier Researcher Support

Increase your article's impact

Our Get Noticed guide contains a range of practical tips and advice to help you maximize visibility of your article.

Publishing Lab

Do you have ideas on how we can improve the author experience? Sign up for the Elsevier Publishing Lab and help us develop our publishing innovations!

Have questions or need assistance?

Please do not reply to this automated message.

For further assistance, please visit our Elsevier Support Center where you search for solutions on a range of topics and find answers to frequently asked questions.

You can also talk to our researcher support team by phone 24 hours a day from Monday-Friday and 24/7 by live chat and email.

© 2018 Elsevier Ltd | Privacy Policy http://www.elsevier.com/privacypolicy

Elsevier Limited, The Boulevard, Langford Lane, Kidlington, Oxford, OX5 1GB, United Kingdom, Registration No. 1982084. This e-mail has been sent to you from Elsevier Ltd. To ensure delivery to your inbox (not bulk or junk folders), please add article_status@elsevier.com to your address book or safe senders list.